

Design 3: 99kW LTU Carpark Bendigo, Flora Hill VIC 3550

Shading Heatmap



Shading by Field Segment

Description	Tilt	Azimuth	Modules	Nameplate	Shaded Irradiance	AC Energy	TOF ²	Solar Access	Avg TSRF ²
Field Segment 1 (copy)	7.0°	358.5°	200	97.0 kWp	1,698.9kWh/m ²	138.6 MWh ¹	92.0%	97.9%	90.1%
Totals, weighted by kWp			200	97.0 kWp	1,698.9kWh/m ²	138.6 MWh	92.0%	97.9%	90.1%


¹ approximate, varies based on inverter performance

² based on location Optimal POA Irradiance of 1,886.2kWh/m² at 33.8° tilt and -2.2° azimuth


Solar Access by Month

Description	jan	feb	mar	apr	may	jun	jul	aug	sep	oct	nov	dec
Field Segment 1 (copy)	98%	98%	99%	98%	97%	95%	96%	98%	98%	98%	98%	98%
Solar Access, weighted by kWp	97.6%	98.0%	98.5%	98.1%	97.0%	95.0%	96.0%	98.4%	98.2%	98.4%	98.5%	98.1%
AC Power (kWh)	17,696.3	14,285.6	13,443.4	9,612.9	6,651.8	5,388.6	6,204.9	8,395.2	10,713.5	13,751.3	15,475.6	17,025.7

Monthly Production

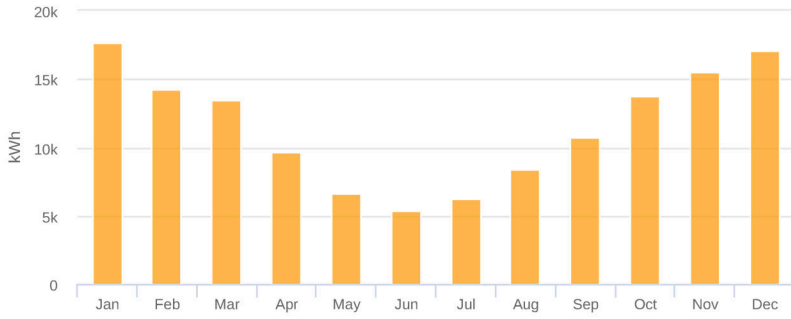

Sources of System Loss

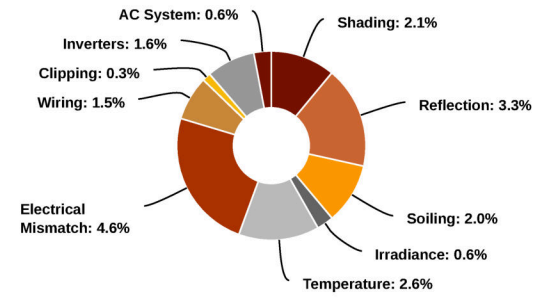

Southwestern Angle



Southeastern Angle

