



# SpeechRecognition

Performance Report

2017-10-21

**OPEN AI LAB**

## Revision Record

Date	Rev	Change Description	Author
2017-10-21	0.1.0	Initial version	

catalog

1 PURPOSE .....3

2 TEST ENVIRONMENT .....3

3 PERFORMANCE ON DIFFERENT CORES.....3

4 ACCURACY .....3

5 CONCLUSION.....4

# 1 Purpose


This Report is tested on RK3399 platform. It only contains CPU data.

## 2 Test Environment

Hardware SoC : Rockchip RK3399

- GPU: Mali T864 (800MHz)
- CPU: Dual-core Cortex-A72 up to 2.0GHz (real frequency is 1.8GHz); Quad-core Cortex-A53 up to 1.5GHz (real frequency is 1.4GHz)

Operating System : Ubuntu 16.04

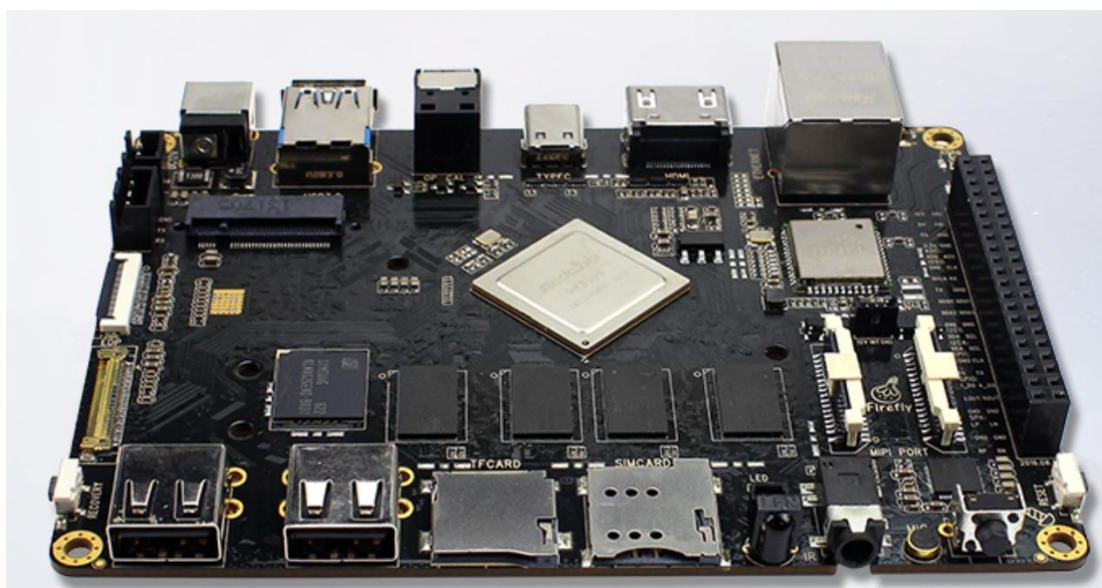

## 3 Performance on Different Cores

This demo supports total 100 commands which are listed in command\_list.md. Calculate the average RTF(Real Time Rate,  $T_{\text{decode}} / T_{\text{recode}}$ ) of ten times with various speech length and content, and print the result in terminal. It only supports single core on CPU.

	Real Time Rate
1A721.99G	1
1A53@1.51G	2.9

## 4 Accuracy

WER (Words Error Rate) on test set (indoor, low noise). Get the test set from [ftp://ftp.openailab.net/CR\\_resource/command\\_recognition.tgz](ftp://ftp.openailab.net/CR_resource/command_recognition.tgz).

Speaker	Words Error Rate (%)
A003	20
A012	7.27
B002	1.36

## 5 Conclusion

From the above test cases, we can deduce that :

1. The performance on A72 is better, it 3-time faster than on A53.
2. For different speakers, the WERs changed from 1.4% to 20%.