

OCORA

Open CCS On-board Reference Architecture

CCS On-board Retrofit

Guideline for Projects

This OCORA work is licensed under the dual licensing Terms EUPL 1.2 (Commission Implementing Decision (EU) 2017/863 of 18 May 2017) and the terms and condition of the Attributions- ShareAlike 3.0 Unported license or its national version (in particular CC-BY-SA 3.0 DE).



Document ID: OCORA-TWS05-015

Version: 1.04

Date: 31.01.2025

Revision history

Version	Change Description	Initial	Date of change
0.01	First draft of the document	EdP	11.05.2022
0.02	Added chapters 3,4	JW	09.08.2022
0.03	Added requirement in chapter 5	EdP, CG	06.09.2022
0.04	Added chapter 2	EdP	17.10.2022
0.05	Revision requirement and simplification and ready for R3 review	EdP, CG	02.11.2022
1.00	Final revision after core team review (R3)	EdP	02.12.2022
1.01	Final revision after editorial work	RM	09.12.2022
1.02	Rearrangement of the requirement	EdP CG	21.06.2023
1.03	Rework after Coreteam review feedback	EdP CG	30.06.2023
1.04	Editorial updates in the introduction chapter	ML	31.01.2025

Table of contents

1	Introduction	5
1.1	Purpose of the document.....	5
1.2	Applicability of the document	5
1.3	Context of the document.....	5
2	CCS-OB – TCMS interface.....	6
3	Long-term objectives	7
3.1	Possible separation of responsibilities	7
3.2	Possible implementation of additional functionality	10
4	Short-term approach.....	11
4.1	CCS-OB – TCMS interface in retrofit projects	12
5	Project guideline requirements requested in call for tender	14
Appendix A	Complete list of requirements per project phase.....	15
A1	Important note.....	15
A2	Vehicle Preparation – Pre-Bidding phase.....	15
A3	Vehicle Preparation – Bidding phase.....	15
A4	Vehicle Preparation - Project kick-off phase.....	16
A5	Vehicle Preparation – Design phase	17
A6	Vehicle preparation – Implementation phase	19
A7	Vehicle preparation – Functional test phase	20
A8	Further project phases	20

Table of figures

Figure 1 - CCS-OB – TCMS interface	6
Figure 2 - Role's overview	9
Figure 3 - Significance matrix of TWS07 RAMS Evolution.....	11

References

Reader's note: please be aware that the numbers in square brackets, e.g. [1], as per the list of referenced documents below, is used throughout this document to indicate the references to external documents. Wherever a reference to a TSI-CCS SUBSET is used, the SUBSET is referenced directly (e.g. SUBSET-026). OCORA always references to the latest available official version of the SUBSET, unless indicated differently.

- [1] OCORA-BWS01-010 – Release Notes
- [2] OCORA-BWS01-020 – Glossary
- [3] OCORA-BWS01-030 – Question and Answers
- [4] OCORA-BWS01-040 – Feedback Form
- [5] OCORA-BWS03-010 – Introduction to OCORA
- [6] OCORA-BWS04-010 – Problem Statements
- [7] OCORA-TWS01-030 – System Architecture
- [8] OCORA-TWS04-010 – Functional Vehicle Adapter – Introduction
- [9] SUBSET-139, ATO over ETCS - ATO-OB / TCMS FFFIS, version 0.1.0
- [10] SUBSET-119, ERTMS/ETCS – Train Interface FFFIS, version 1.2.10
- [11] OCORA-TWS07-040_RAMS_Optimized Approval Process
- [12] SUBSET-147, ERTMS/ETCS and ATO over ETCS FFFIS part: CCS Consist Network Communication Layers version 0.1.10

1 Introduction

1.1 Purpose of the document

The purpose of the document is to specify what a supplier shall consider in an ETCS/ATO onboard retrofit project to avoid some of the problems stated in the OCORA problem statements [6] and, in more detail, the approach and methodology to be used and the documents to be generated, as intermediate formal deliverable, for the interfaces with the vehicle TCMS as well as with the ETCS and ATO onboard systems [9], [10]. This document has been generated based on the experiences within the Stuttgart retrofit project of Deutsche Bahn AG.

This document is addressed to experts in the CCS domain and to any other person, interested in the OCORA concepts for onboard CCS. The reader is invited to provide feedback to the OCORA collaboration and can, therefore, engage in shaping OCORA. Feedback to this document and to any other OCORA documentation can be given by using the Feedback Form [4].

If you are a railway undertaking, you may find useful information to compile tenders for OCORA compliant CCS building blocks, for tendering a complete onboard CCS system, or for onboard CCS replacements for functional upgrades or for life-cycle reasons.

If you are an organization interested in developing onboard CCS building blocks according to the OCORA standard, information provided in this document can be used as input for your development.

1.2 Applicability of the document

The document is informative. Subsequent releases of this document will be developed based on a modular and iterative approach, evolving within the progress of the OCORA collaboration.

1.3 Context of the document

This document is published as part of an OCORA Release, together with the documents listed in the Release Notes [1]. Before reading this document, it is recommended to read the Release Notes [1]. If you are interested in the context and the motivation that drives OCORA, we recommend to read the Introduction to OCORA [5] and the Problem Statements [6]. The reader should also be aware of the Glossary [2] and the Question and Answers [3].

The interface specification defined in this document is based on the OCORA approach for integrating the CCS onboard with the vehicle by means of a Functional Vehicle Adapter. Therefore, it is suggested to previously read the introduction document to the Functional Vehicle Adapter [8] that illustrates the context of the Functional Vehicle Adapter itself.

2 CCS-OB – TCMS interface

OCORA requests the standardization of the interface between the CCS and the vehicle (TCMS) to implement standard ETCS/ATO functionality as a product. This to come to a modular design, given as input for the today supplier specific solutions.

The target is a complete FFF interface based on the relevant subsets [9] and [10], to cover the interoperability targets, but also considering today's supplier specific and operationally in use signals. To reach "plug & play" like exchangeability, all vehicle or solution specific adjustments are obtained via parametrization of an intermediate FVA (Functional Vehicle Adapter) for dedicated functions. This allows a standard ETCS/ATO functionality as a product (not as a project). In other words - the vehicle specific implementation shall be done in the FVA and not in the EVC/ObU to keep the interface stable for fleet-wide modifications including various vehicle types.

The figure below describes the migration steps:

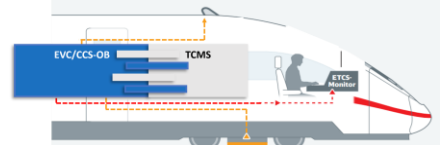
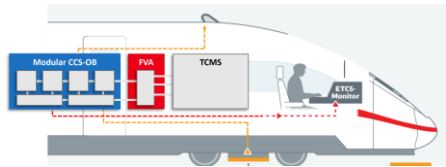
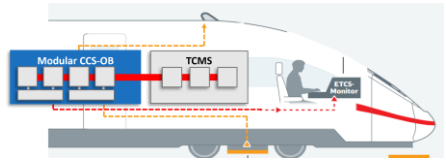
<p>1)</p> <p>Current situation</p>	<ul style="list-style-type: none"> • Monolithic CCS. • EVC/CCS-OB tightly integrated with TCMS. • CCS-OB replacements requires understanding of individual, manufacturer specific TCMS. 	
<p>2)</p> <p>OCORA Functional Vehicle Adapter</p>	<ul style="list-style-type: none"> • Modular, upgradeable CCS-OB architecture. • CCS-OB communicates with TCMS via standardized interfaces (SS-119, SS-139, SS-147). Non-compliant TCMSs are adapted to the standardized interfaces through a Functional Vehicle Adapter (FVA). • CCS-OB upgrades/replacements do not require a detailed understanding of the TCMS systems anymore. 	
<p>3)</p> <p>OCORA Long Term perspective</p>	<ul style="list-style-type: none"> • Comprehensive next-gen Communication Network for connecting all train control and safety systems (TCMS and CCS). TCMSs are compliant with the standardized interfaces. The need for an FVA vanishes. • Separation of HW and SW via Computing Platform. 	

Figure 1 - CCS-OB – TCMS interface

State of the art is the step 1 "Current situation". Where suppliers are offering their EVC/CCS-OB solution to be integrated in different fleets (different vehicles with potentially unknown TCMS signals).

Today for each project there is a need for a specific study, coming to a specific solution, where decisions on the adjustment to be made inside the current TCMS (when necessary, involving the OEM supplier) or on the signal interpretation and consolidation on the EVC/ObU are made.

In that respect the OCORA goal, in favor of the modularity, is to reach a standard FFF interface for the CCS-OB obtained from the vehicles via a FVA dedicated module (step 2 "OCORA Functional Vehicle Adapter") or via OEM native implementation (step 3 "OCORA Long Term perspective") based on the actual subsets [9], [10].

To move from step 1 "Current situation" to the next steps 2) or 3) is necessary to extend the definition of the CCS-OB/ETCS-ATO interface reaching an FFF standard definition:

To facilitate this harmonization and come to a proposal (CCS-OB FFF standard interface) it is regarded as necessary to include a detailed analysis of the current solutions.

On top of the different initiatives already running inside the industry (UNISIG) and study stimulated around the OCORA program, this document aims to request the needed details in form of proposed formal deliverables to be requested in future projects (step 1). These deliverables can later be used as pragmatic knowledge base to reach a common understanding and agreement on the delta to be considered, on top of the actual subsets

[9] and [10], for a complete definition of a standard FFF interface.

Also, it shall be mentioned that the standardization of the communication layer [12] is going on in parallel (aimed for 2025), which is a further enabler for the FFFIS.

The Chapter 3 describes the OCORA long term objective.

The Chapter 4 describes the OCORA short term target to be executed in standard projects to come.

The Chapter 5 list the minimal set of requirements to be requested in calls for tender.

The Appendix A describes the complete list of detailed requirements to be included in future calls for tender and their rationale.

3 Long-term objectives

While the OCORA long-term objectives are explained within the published documents, which have been listed in chapter 1, this guideline is an intermediate step to approach the following objectives: to prepare market participants for the expected shift in standard modularity of building blocks, modular safety as well as commercial and engineering roles.

Further details of the expected functionality of the FVA and the foreseen interface specification [9], [10] and [12] are part of the OCORA published documents, too. These must be considered as the future aim which shall be introduced and facilitated to the railway industry with the contractual requirement of this guideline.

In addition to the framework known from the referred OCORA documents, this guideline will introduce the below listed subjects to the retrofit projects of the near future:

- Precursor to OCORA implementation:
 - o The contractual requirement to apply this guideline will layout the basis of information exchange and responsibility distribution needed for the modularity aspired by OCORA. While this retrofit guideline document version is an intermediate approach ahead of future more detailed versions, which are still under discussion within the OCORA workstream.
- Precursor to modular safety concept and optimized approval:
 - o The approach of modular safety is one of the concepts of OCORA. For the scope of this guideline, it means that the interface definition of each vehicle type will have to be documented and has to be provided by the train manufacturer and the CCS-Onboard supplier. With this information the FVA can be introduced as universal interface module, as described in the FVA introduction documents [8].
- Financial benefit
 - o The application of this guideline in the tender, bidding and engineering of the upcoming retrofit projects will facilitate the collection of the detail specific information in different implementations that will be a solid support to reach a standard interface.

3.1 Possible separation of responsibilities

A change from a “project by project” integrated approach towards a modular architecture, calls for a new split of responsibilities to make it a benefit for all involved parties and to reduce the overall effort by means of reusability. Following this vision, the OCORA RAMS workstream is elaborating an optimized approval process [11] which will require the definition and separation of specific commercial and engineering roles as well as responsibilities. These following roles are under consideration and shall be required in the retrofit projects:

System Integrator (SI): Can be RU or third party/new supplier

Team in charge of:

- performing the safe integration of the vehicle into a dedicated track network (e.g., ERTMS line XYZ),

- realizing the data preparation of a vehicle into a network (main technical task),
- realizing the Specific Application Safety Case (train and network),
- managing the other assessment types (e.g., NoBo, DeBo),
- submitting the Application for Placing On the Market (APOM) to the ERA (official document allowing the train to be placed in commercial revenue),
- (If requested) processing the vehicle authorisation to the ERA (ending in an official document allowing the train to be placed in commercial revenue).

Vehicle Preparator: Can be RU or train manufacturer but is unlikely to be a traditional CCS supplier or third party/new supplier

Team in charge of:

- support the safe integration of the CCS-OB into the RST.
- testing signals and bus(es) present in the RST, basically testing the interface.
- testing the "legacy" signals existing between driver and RST which are not involving the CCS-OB system (if any). This is to ensure that CCS-OB integration does not disturb other proprietary signals.

CCS Onboard Integrator (CI): Neither RU nor train manufacturer but is traditionally the CCS supplier or a third party/new supplier

Team in charge of:

- formalizing the functionalities required from the CCS-OB (depending on the project request)
- designing the complete integration phase (e.g., electrical drawings, mechanical specifications)
- assign the above tasks to the Vehicle Preparator, CCS-OB Builder and Train Adapter Supplier (TAS)
- certifying the safe integration of the CCS OB into the RST
- physical integration of the CCS-OB into vehicle
- testing the complete vehicle in the scope of OCORA, TSI CCS/TSI LOC&PAS using the CCS-OB and RST as black boxes
- data preparation (parametrisation) of the CCS-OB for the dedicated RST
- realizing the Specific Application Safety Case (full equipped vehicle),
- managing the other assessment types (e.g., NoBo, DeBo).

Vehicle Integrator (VI): Can be either RU, train manufacturer, traditional CCS supplier or third party/new supplier

The responsibilities of the Vehicle Integrator are still to be defined.

Building Block Supplier (BBS): Can be either RU, train manufacturer, traditional CCS supplier or third party/new supplier

The responsibilities of the Building Block Supplier are still to be defined.

Train Adapter Supplier (TAS): Can be either RU, train manufacturer, traditional CCS supplier or third party/new supplier

The responsibilities of the Train Adapter Supplier are still to be defined.

The table below shows the separation of roles within the present state of the development of the optimized approval process. While technically it is possible that any player in a retrofit project can take any of the roles, it is likely that RU, train manufacturer and traditional CCS supplier will take possession of the roles as shown in the table. The introduction of new suppliers to the market maybe one of the outcomes of the role definition and contractually defined separation.

ROLE/ Player	RU	Train manufacturer	Traditional CCS supplier	third party/new supplier
Vehicle Preparator (SI)	Can be	Can be		
System Integrator (SI)	Can be		Can be	Can be
Vehicle Integrator (VI)	Can be	Can be	Can be	Can be
CCS-OB Integrator (CI)			Can be	Can be
Building Block Supplier (BBS)	Can be	Can be	Can be	Can be
Train Adapter Supplier (TAS)	Can be	Can be	Can be	Can be

The separation of the roles should be required in the retrofit tenders to facilitate the basis for the performance increase in the approval and certification process for the different vehicle classes.

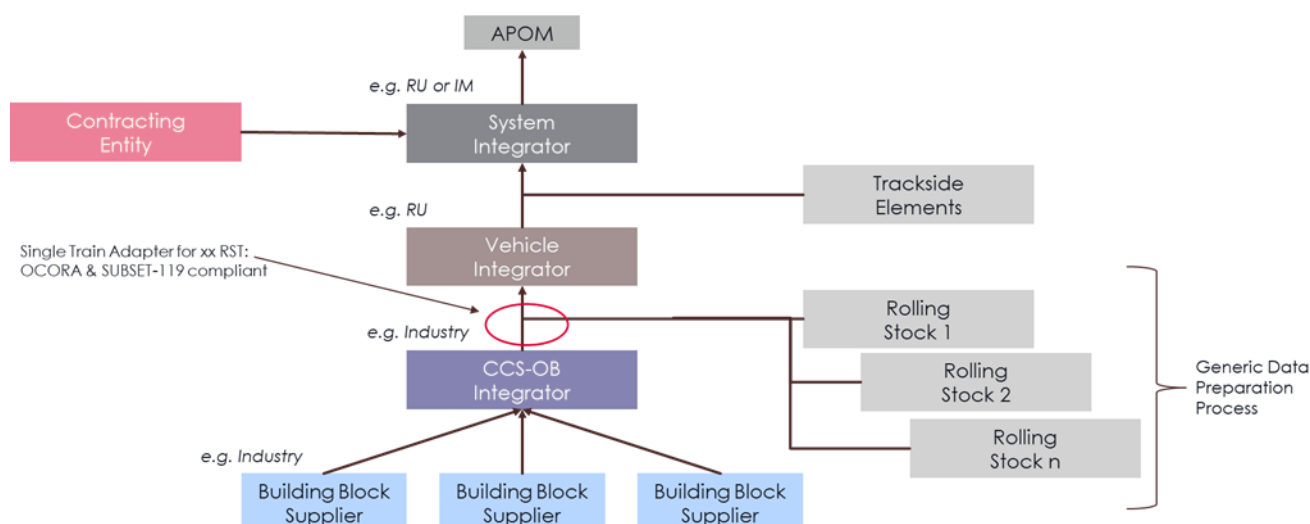


Figure 2 - Role's overview

The figure above shows an overview of the interaction of the roles and the position of the train adapter which will include the FVA. The intention is to conceive the FVA to be included in most or all available Rolling Stock types to act as signal converter and buffer between Vehicle Integrator and CCS-OB Integrator. Thus, introducing a module which can cover all possible variations of Rolling Stock with CCS-OB signals.

First step: focus on vehicle preparation, which is the scope of the guideline for now and part of the short-term deliverables as described in chapter 3.

Knowing that the roles above are not distinguished in present projects, the exchange of information of the signals will be the first basis between the present Vehicle Integrator (supplier of the vehicle, as of today) and the System Integrator (Contracting entity/ holder of the vehicle i.e. RU). The requirements how this information exchange can be established, is detailed in the Appendix A.

Future steps to be taken: focus on the later project phases of projects with tenders which can apply this guideline.

In later project phases the roles should become part of the contract framework and thereby introduce an obligation for information exchange and collaboration, but also separate responsibilities for the final product stages.

3.2 Possible implementation of additional functionality

Older vehicle types may not have a TCMS system, as explained in the FVA introduction. In this case it may be necessary to generate certain standard signals for the CCS onboard systems to satisfy functionalities which use the standard interface to the FVA/TCMS. Another functionality of the FVA will be the conversion of train specific signals to a standard format for the CCS-Onboard systems, if an older generation of vehicle type does not provide such signal format(s).

This way the FVA acts as the interface converter or standard interface signal generator to ensure and define train independent signal formats towards the CCS-Onboard.

The information exchange of train supplier and CCS-Onboard supplier will be required by the contracting entity by requiring the application of this guideline to exchange the list of signals with all the formats and requirements of the different signals.

The modularity can only be achieved if the level of conversion of the FVA fits to most or all available Rolling Stock variants and vehicle types.

The FVA, as part of the train adapter, should follow the evolution strategy of OCORA. Since this strategy is still under discussion this guideline will require to follow the “significance process and matrix” of the TWS07 RAMS Evolution document [11]. When parts of the CCS onboard will be changed, the significance matrix process shows the steps to be taken to analyse if an evolutionary change can be categorized as minimal, medium or high in terms of criticality for safety related aspects.

The result of this analysis would provide insight if a new certification, a letter of support per modification or only an annual letter of support with the list of all annually occurred modifications is needed. The process to evaluate this significance is part of the next OCORA Releases and cannot yet be taken as reference for this guideline but will be considered in future updates.

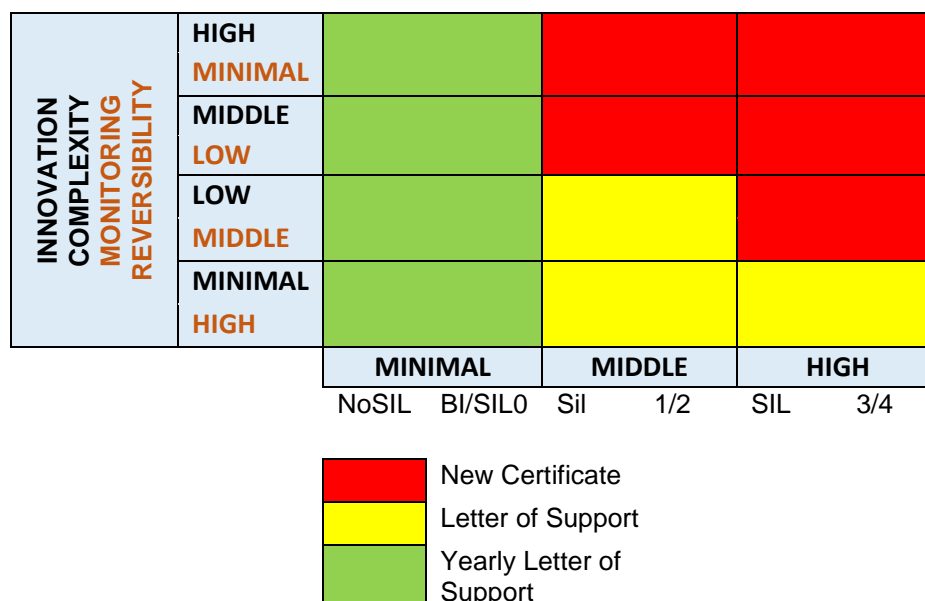


Figure 3 - Significance matrix of TWS07 RAMS Evolution

The following criteria aim at choosing the line in the matrix from Figure 3 above from “MINIMAL” to “HIGH”.

Based on the combination between minimal, middle and high the need to apply for a new certificate, a letter of support or a yearly letter of support will be defined. Since the FVA will convey and convert signals between TCMS and CCS-Onboard and the modularity of the building blocks within the CCS is not yet given. The modifications will likely be middle and high at all initial evolutionary stages of the FVA.

4 Short-term approach

The vehicle preparation will be asked as explicit part of the contractual requirements, as formal intermediate deliverable. For this, the players have to exchange the information and details needed to clearly define the interface between TCMS/FVA and CCS onboard, based on chapter 5 of the FVA introduction document [8].

Based on OCORA concepts, new tenders have to require the application of this guideline. Furthermore, the roles and the contractual obligation and the compliance to exchange all needed information for the interface definition between contracting entity, Vehicle Integrator and CCS-Onboard Integrator has to be an essential requirement for bid placement acceptance.

Requirements to fulfil each role are identified in more detail in Appendix A for each project engineering phase. In the present state of this guideline the emphasis is put on the vehicle preparation phase for the purpose to facilitate the required information exchange of all signals according to the relevant subsets [9] and [10] as well as as proprietary additional signals for the individual vehicle types.

The CCS-Onboard supplier is the integrator and the Vehicle Preparator in the projects of today, whereas the future setup of the OCORA role structure will allow further separation of the roles and thereby open the door for new players/new suppliers for parts of the project work packages and responsibilities.

The ETCS/ATO interface to the TCMS of the vehicles which will require a retrofit for ETCS/ATO onboard capability has to be documented and made available to all onboard suppliers/integrators, vehicle owners and contractual entities. The product requirement specification for system interfaces of either ETCS/ATO onboard or TCMS has to include the needed modifications and input signal details as listed in Appendix A for each project phase.

With a successful documentation of the interface specification, the basis will be created for the development of the FVA in future OCORA phases. Since the resulting interface specification is the first step for the standardization of the common interface specification and the modularisation goal of OCORA.

Without the mandatory contractual deliverable, the documentation will remain hidden in the monolithic design roles which only require internal information exchange instead of documenting the interfaces within the concept and design phases during retrofit. The number of vehicle and system variants will require an increased throughput of retrofit projects. This can be achieved with the interface definitions, by then clustering similar vehicle types to groups of interface combination. In this way, more retrofit projects can be completed by identifying the similar vehicle preparation steps needed in relation to the similar interface combinations.

To motivate the tendering and bidding parties for the upcoming retrofit projects, the requirement “OCORA Release 3 compatible” will have to be listed among the specified project framework requirements. With the introduction of this, the learning and broader definition of the TCMS to ETCS/ATO onboard interfaces will improve to more reliable vehicle preparation and project planning based on reuse among projects.

Since the OCORA compatibility will also emphasise on the definition of the roles and their responsibility, as described in chapter 3, the project organisations will automatically take steps towards the modularity needed for the long-term aspired optimized approval process. By leaning towards the OCORA compatibility, the process establishment and retrofit project handling will improve from each retrofit project in a learning curve for role and interface definition.

With the maturity of the application of this guideline, the guideline itself will evolve and include the lessons learned. The goal is a full OCORA modularity in the future. This will have to evolve in several iterations until the interfaces can be standardised, the project roles are defined, separated, and fixed during the project phases, and in future modular safety and optimized modular approvals can be achieved.

One of the future steps should be the implementation of the roles and their responsibilities in more clarity. Having the roles separated and the interfaces standardised, the room will be established for additional suppliers to provide building blocks and modules or processes to the projects. The aim is to create the ability for contracting entities and the railway industry to retrofit and roll-out the ETCS onboard to the present Rolling Stock in Europe.

These are the immediate steps required by this guideline:

1. Contractual obligation to apply this guideline in tenders for the ETCS/ATO retrofit projects
2. Call for OCORA compliance in tenders.
3. Define roles such as Onboard Building Block Supplier, Vehicle Integrator, CCS-Onboard Integrator, Vehicle Preparator and Contracting Entity¹
4. Prepare the projects and vehicles according to the guideline, providing knowledge of all TCMS-ETCS/ATO onboard signals and defining the interfaces in clarity.

4.1 CCS-OB – TCMS interface in retrofit projects

Target of this document are “retrofit projects”. It is assumed that the vehicles have a modern TCMS architecture with a bus system (e.g. MVB, ETH, CAN) where most of the signals needed to be implemented for the ETCS/ATO onboard retrofit are already present and do not have to be generated for the new systems.

It is likewise assumed that the ETCS/ATO onboard building blocks proposed by the supplier is part of a well-established product development roadmap with an available generic application which is configured with added specific applications for each specific project.

4.1.1 Application of this guideline in the retrofit projects

The main intention of this document is to support a formal information exchange to be established by contract, with a proper formal milestone, grouping activities that are supposed to be executed anyhow in the flow of the current contracts, formalising a set of documents as demonstration of the activity of adaptation of the interface between the vehicle TCMS and the ETCS/ATO onboard systems.

Just as example, for the scope of clarity, evidence required in relation to the TCMS to ETCS/ATO onboard interface will contain information like the following (specified more in detail in subsequent chapters of this

¹ these roles can be taken by the same entities

document):

- Signal interfaces
- Project configuration
- TCMS changes
- Signal adaptations (formats to be adapted/converted)
- Parametrization (signal adaptation, vehicle and project specific, generic application configuration)
- Additional signals and/or product specific functions, which are not listed within the Subsets, and the reason why
- Test specifications/procedures/results/pass-fail criteria, use cases
- All other relevant documents...

Projects related to old vehicles, without TCMS present, are classified as special cases. Although not completely out of scope for this document, they are not the main target and require specific discussion and dedicated solutions. New vehicles designs are also not in the main target of this document since the ETCS/ATO onboard integration is supposed to be already managed, following the same principle of this document, in the main contract.

4.1.2 Split of the deliverables in the standard project phases

Every project phase requires specific deliverables which are listed in the Appendix A. All those deliverables are part of the contractual volume to be named in the tenders for the retrofit project to enable the application of this guideline and enforce the exchange of interface signal specifications.

The information delivered in the different phases are not the same and require the exchange of documents which will separate the specification by part, subsystem and position in the execution planning.

4.1.3 Embedding the Guideline in the main contract

Already in the tenders of the upcoming retrofit projects this guideline and the requirement of OCORA compatibility has to be part of the mandatory items. It would increase the motivation of potential bidders if the application of this Guideline would lead to partial EU funding. This way the industry would have a direct incentive for compliance.

5 Project guideline requirements requested in call for tender

The following requirements are an extract of the complete list of requirements contained in the Appendix A. These are the minimal set of requirements to be requested by the contracting entity to the suppliers in the call for tender. The goal of these requirements is to ensure that the suppliers provide evidence of the activities needed on the one hand to adjust the vehicle (TCMS) interface to match the standardized (at least to a certain extent) ETCS/ATO products interface, on the other hand also needed to adjust the ETCS/ATO product interface from the selected supplier to the specificities of the vehicle.

- The supplier, in his offer, has to demonstrate his capability to implement the vehicle interface (typically on the TCMS system) and indicates the planned actions for having proper information and tools to evaluate the project feasibility and realisation, during the contract execution. The vehicle interface implementation needs to be adjusted for a proper flow of information between the TCMS and the ETCS/ATO onboard systems, as necessary.
- The supplier has to deliver an integration concept document describing how the CCS-Onboard is integrated into the Rolling Stock for each involved vehicle type (including sub-variants). This document describes all required signals, how these signals are available on Rolling Stock side, indication if a Train Adapter component is used, which functions are provided by the Train Adapter (including the description of mathematical functions, if any).
- The supplier has to deliver an interface specification describing at FFFIS level the interface from CCS-Onboard towards the Rolling Stock (TCMS and/or other) for each involved vehicle type (including sub-variants)
- The interface must be implemented on the CCS-Onboard side (ideally the standardised interface can be applied) and it must also be implemented on Rolling Stock side (either by the TCMS directly or through a Train Adapter).
- The complete mapping of the Bus System related to the loop TCMS-ETCS/ATO must be defined and formalized at the beginning of the project execution.
- The supplier has to deliver a document describing the required modifications on the TCMS for each involved vehicle type (including sub-variants).
- The supplier must deliver a test specification of the interface from the Rolling Stock (TCMS) towards the CCS-Onboard for each involved vehicle type (including sub-variants).
- The supplier must deliver a test specification of the interface from the CCS-Onboard towards the Rolling Stock (TCMS) for each involved vehicle type (including sub-variants).
- The supplier must deliver a document describing all adjustable parametrisation items of the ETCS/ATO applications with the description of the project specific parametrisation settings. All these parametrisation items will have to be clearly listed and defined including the rationale behind the value of each item.
- The supplier has to deliver a test report from testing the interface of the Rolling Stock (TCMS) towards the CCS-Onboard for each involved vehicle type (including sub-variants).
- The supplier has to deliver a test report from testing the interface of the CCS-Onboard towards the Rolling Stock (TCMS) for each involved vehicle type (including sub-variants).

Appendix A Complete list of requirements per project phase

In this appendix the complete list of requirements is described, including the extracted list of requirements indicated in the previous chapter 5. For each call for tender and specific project the requirements list described in the previous chapter can be amended by adding further relevant requirements.

The requirements in this appendix are described within the relevant project phase, furthermore a rationale is provided for more clarity.

The vehicle preparation phase shall be seen as intermediate deliverable in standard retrofit projects with a focus on the CCS-OB - TCMS interface.

A1 Important note

This part of the document aims to support the OCORA strategy as described in the previous chapters. To prepare the scenario for the future interfaces between different scope of work, specific requirements are here expressed in relation to the vehicle preparation phase scope of work.

Other activities related to the whole project are not considered here unless necessary (will be eventually added in future version where other project phases will be detailed).

It is anyhow to be outlined that, for the specific projects to come, it is the organisation responsible for the whole project (typically the purchasing organisation that publishes the calls for tender) that need to develop a concept how the whole contract will be organized.

In case the principle described with this document will be used as a whole, the project organisation must be consistent with the roles described in chapter 3.1.

Following requirements will apply to two different roles.

- Contracting Entity (*vehicle owner/RU*)
- Supplier (*CCS onboard bidder/supplier*)

A2 Vehicle Preparation – Pre-Bidding phase

No requirement yet defined here related to the vehicle preparation

A3 Vehicle Preparation – Bidding phase

A3.1 Reference the 'Project Guideline' document in the call for tender.

The Contracting Entity must reference the 'Project Guideline' document (this document) in the call for tender.

A3.1.1 Rationale

The 'Project Guideline' formally defines the deliverables during the project. These are needed for proper project execution and to ensure that all know-how is properly documented.

A3.2 Functions required from the CCS onboard

The Contracting Entity must issue a specification defining which functions are required from the CCS-Onboard

(e.g. ETCS Levels, ETCS Modes, Track Conditions, ATO GoA level, interoperability specification versions, etc.).

A3.2.1 Rationale

For clarity concerning the used signals.

To document the leading requirements for parametrisation of the CCS onboard systems. Based on this information the contractor can estimate the required efforts.

A3.3 Vehicle interface documentation

The Contracting Entity in the call for tender must deliver an up-to-date interface description of the current TCMS (Rolling Stock) towards the CCS-Onboard for each involved vehicle type (including sub-variants), including the information of the former supplier.

A3.3.1 Rationale

The Contractor needs this information to elaborate his offer. Based on this information he will estimate the efforts and clarify how the new interface can be implemented.

A3.4 Information needed from the TCMS system at the bidding stage

The supplier, in his offer, has to demonstrate his capability to implement the vehicle interface (typically on the TCMS system) and indicates the planned actions for having proper information and tools to evaluate the project feasibility and realisation, during the contract execution.

The vehicle interface implementation needs to be adjusted for a proper flow of information between the TCMS and the ETCS/ATO onboard systems, as necessary.

A3.4.1 Rationale

For the implementation of an ETCS/ATO onboard system into an existing vehicle, detailed information on the existing inner data flow and protocols of the vehicle TCMS are needed. Being the ETCS/ATO onboard interfaces to the vehicle defined in [9] and [10], it is important, for the project implementation, to make a preliminary evaluation of the possible existing gaps and eventually to assess the capability to introduce changes in the TCMS system or equivalent measures.

In case of changes in the TCMS vehicle system that will require relevant approval for operations by the authorities, this will have to be outlined and must be evaluated considering the applicable rules (at least EN50126:2017, EN50128:2011, EN50129:2018; EN50159:2010).

For a successful project execution, the main modifications needed on the vehicle TCMS original system, must be outlined and described with the corresponding rationale.

The individual signals available from the specific vehicle TCMS (INPUTs/OUTPUTs) need to be mapped with the signals defined in the interface specifications SUBSET-034 / SUBSET-119 / SUBSET-139. This represents a complete picture of the interface between the TCMS and ETCS/ATO onboard functions.

At its best those capability shall be supported by an agreement with the vehicle manufacturer during the bidding stage, where both, project concept and updates, are managed in a co-design phase.

A4 Vehicle Preparation - Project kick-off phase

A4.1 Project plan

The contracting entity has to deliver a project plan (at deliverables level) indicating in which time frame the vehicle preparation phase shall be realised.

A4.1.1 Rationale

For clarity related to the time plan of the vehicle preparation phase.

A4.2 Communication concept

The contracting entity has to deliver a communication concept (who is reporting to whom), how the activities for the vehicle preparation phase will be synchronised between the different involved organisations.

A4.2.1 Rationale

For clarity related to the specific communication during the Vehicle Preparation phase

A5 Vehicle Preparation – Design phase

A5.1 Integration concept

The supplier has to deliver an integration concept document describing how the CCS-Onboard is integrated into the Rolling Stock for each involved vehicle type (including sub-variants). This document describes all required signals, how these signals are available on Rolling Stock side, indication if a Train Adapter component is used, which functions are provided by the Train Adapter (including the description of mathematical functions, if any).

A5.1.1 Rationale

Target of the OCORA solution is to have always the same and standardised interface between the ETCS/ATO onboard applications and the TCMS/vehicle. To fulfil this goal, it might be needed to adapt data to actors/from sensors on the vehicle for specificities of the vehicle. In the OCORA solution this adaptation function is executed in a component called Functional Vehicle Adapter SW. The interface of this intermediate component to the ETCS/ATO onboard shall fulfil the Interface Specifications [9] and [10] as well, as per target, be connectable to any CCS Onboard subsystem adhering to those defined interfaces.

The transformation of the vehicle real input/output data into the Interface Specifications [9] and [10] needs to be formalized and described.

A5.2 Interface specification

The supplier has to deliver an Interface specification describing at FFFIS level the interface from CCS Onboard towards the Rolling Stock (TCMS and/or other) for each involved vehicle type (including sub-variants) The interface must be implemented on the CCS Onboard side (ideally the standardised interface can be applied), and it must also be implemented on Rolling Stock side (either by the TCMS directly or through a Train Adapter).

A5.2.1 Rationale

The complete signal list related to the project specific interface of the TCMS vehicle system (including needed specific customer requirement agreements) with the ETCS/ATO onboard systems needs to be documented.

In the intermediate phase, where some signals coming from the TCMS possibly need to be transformed to meet the interface specifications, this has to be highlighted (FVA functionality). It includes, for instance, the possible use of default values or the activation/deactivation of functionalities.

In case of use of signals not clearly expressed in the interface specifications [9] and [10], these must be emphasized with an exhaustive rationale for the specific need (for example special signal needed by a standard product, diagnostic signal not described in detail in the interface specifications, optional product specific feature, etc).

In case of no use of one or more signals defined in the Interface Specifications [9] and [10], the rationale must as well be clearly detailed for each signal (for instance functions not used in the specific vehicle, feature not used in the specific project, etc).

A document containing those information needs to be agreed with the customer project team.

A5.3 Bus mapping

The complete mapping of the Bus System related to the loop TCMS/ETCS/ATO must be defined and formalized at the beginning of the project execution.

A5.3.1 Rationale

The Bus Mapping contains the complete lists of the signals exchanged between devices and shall reflect what agreed in the different relevant document.

A5.4 Safety relevant signals

The supplier has to deliver a concept how the safety relevant signals at the level of this interface are handled for each involved vehicle type (including sub-variants), also considering the justification / evidence in the safety case.

A5.4.1 Rationale

Is requested a concept for the safety signals for the specific Vehicle Preparation phase. This information will have to be integrated in the overall project safety analysis but will remain documented also specifically for this phase in preparation for the future project structures where the target is to have the Vehicle Preparation phase decoupled from the overall project.

A5.5 Documentation of TCMS modifications

The supplier has to deliver a document describing the required modifications on the TCMS for each involved vehicle type (including sub-variants).

A5.5.1 Rationale

To improve the visibility on what was the problem and what was the reason that brought to a specific change in the TCMS. Detail explanations of the reasons is seen valuable for the scope of this document.

A5.6 Test Plan

The supplier must deliver a test plan defining how the interface of the Rolling Stock toward the CCS Onboard will be tested for each involved vehicle type (including sub-variants). This includes defining a test strategy, where it will be tested (laboratory, vehicle, etc.), how it will be tested (automated test, manual test, etc.).

A5.6.1 Rationale

The testing should be independent from the way the interface has been implemented and the assumption is to develop in future a test methodology (including documents and tools) that can be applied to every vehicle.

A5.7 Interface test specification

The supplier must deliver a test specification of the interface from the Rolling Stock (TCMS) towards the CCS Onboard for each involved vehicle type (including sub-variants).

A5.7.1 Rationale

Testing should be independent from the way the interface has been implemented and the assumption is to develop in future a test methodology (including documents and tools) that can be applied to every vehicle.

A5.8 Interface test specification

The supplier must deliver a test specification of the interface from the CCS Onboard towards the Rolling Stock (TCMS) for each involved vehicle type (including sub-variants).

A5.8.1 Rationale

Testing should be independent from the way the interface has been implemented and the assumption is to develop in future a test methodology (including documents and tools) that can be applied to every vehicle.

A5.9 Project configuration/parameters

The supplier must deliver a document describing all adjustable parametrisation items of the ETCS/ATO applications with the description of the project specific parametrisation settings.

All these parametrisation items will have to be clearly listed and defined including the rationale behind the value of each item.

A5.9.1 Rationale

All specific information related to the ETCS/ATO onboard project that needs to be used by the offered system will be collected in a structured file.

For each configuration item it is requested to know the rationale, and specifically where it is used in the SW application (all instances).and for which functionality.

For instance, information can be used for de-/activating some functionality, to influence/modify the values of existing variables (as an example scaling factors), as parameters in predefined functions etc.

It is requested to have an exhaustive description for each configuration parameter possibly in a dedicated document.

A6 Vehicle preparation – Implementation phase

A6.1 Interface test Report

The supplier has to deliver a test report from testing the interface of the Rolling Stock (TCMS) towards the CCS-Onboard for each involved vehicle type (including sub-variants).

A6.1.1 Rationale

The fulfilment of these interfaces needs to be proven with a dedicated direct test procedure.

As a temporary solution it might be also acceptable to test only the interface within the already foreseen functional tests, as long as each single variable of the interface can be referred, and its use proven.

The CCS-Onboard supplier will have to develop a test procedure that fulfils the Interface Specifications [9] and [10], including a test environment for automatic testing.

The project specific solution will be then tested according to this test procedure showing the final fulfilment of the defined interface.

It is expected that the test environment built for the testing is generic and reusable in any other CCS-Onboard retrofit project based on the Interface Specifications [9] and [10]. In addition, it cannot only be used for the specific project solution.

A6.2 Interface test Report

The supplier has to deliver a test report from testing the interface of the CCS Onboard towards the Rolling Stock (TCMS) for each involved vehicle type (including sub-variants).

A6.2.1 Rationale

The fulfilment of these interfaces needs to be proven with a dedicated direct test procedure.

As a temporary solution it might be also acceptable to test only the interface within the already foreseen functional tests, as long as each single variable of the interface can be referred, and its use proven.

The CCS-Onboard supplier will have to develop a test procedure that fulfils the Interface Specifications [9] and [10], including a test environment for automatic testing.

The project specific solution will be then tested according to this test procedure showing the final fulfilment of the defined interface.

It is expected that the test environment built for the testing is generic and reusable in any other CCS-Onboard retrofit project based on the Interface Specifications [9] and [10]. In addition, it cannot only be used for the specific project solution.

A6.2.2 Integration test specification

The supplier has to deliver a test specification of the integration test for each involved vehicle type (including sub-variants).

A6.2.3 Rationale

The testing should be independent from the way the interface has been implemented and the assumption is to develop in future a test methodology (including documents and tools) that can be applied to every vehicle.

A7 Vehicle preparation – Functional test phase

A7.1 Integration test report

The supplier has to deliver a test report of integration testing: integration of the CCS Onboard into the Rolling Stock for each involved vehicle type (including sub-variants).

A7.1.1 Rationale

The testing should be independent from the way the interface has been implemented and the assumption is to develop in future a test methodology (including documents and tools) that can be applied to every vehicle.

A8 Further project phases

Yet, no requirements have been defined related to the further project phases, such as Integration, Manufacturing, Integration, Commissioning, Acceptance and Operation.