

Quantum Computer Outreach Project

Generated by Doxygen 1.8.13

Contents

1	Todo List	1
2	Bug List	3
3	Data Structure Index	5
3.1	Data Structures	5
4	File Index	7
4.1	File List	7
5	Data Structure Documentation	9
5.1	BTN Struct Reference	9
5.1.1	Detailed Description	9
5.2	cycle_node Struct Reference	10
5.2.1	Detailed Description	10
5.3	LED Struct Reference	10
5.3.1	Detailed Description	11
5.4	LED_GLOBAL Struct Reference	11
5.4.1	Detailed Description	11
5.5	RGB Struct Reference	12
5.5.1	Detailed Description	12

6	File Documentation	13
6.1	dspic33e/qcomp-sim-c.X/algo.c File Reference	13
6.1.1	Detailed Description	15
6.1.2	Function Documentation	15
6.1.2.1	check_op()	15
6.1.2.2	check_qubit()	16
6.1.2.3	gate()	16
6.1.2.4	gate_display()	16
6.1.2.5	op_routine()	16
6.1.2.6	repetition_code()	17
6.1.2.7	swap_test()	17
6.1.2.8	toffoli_gate()	18
6.1.2.9	two_gate()	18
6.1.2.10	two_gate_display()	19
6.2	dspic33e/qcomp-sim-c.X/algo.h File Reference	19
6.2.1	Detailed Description	20
6.2.2	Function Documentation	21
6.2.2.1	check_op()	21
6.2.2.2	check_qubit()	21
6.2.2.3	gate()	21
6.2.2.4	gate_display()	22
6.2.2.5	op_routine()	22
6.2.2.6	repetition_code()	22
6.2.2.7	swap_test()	23
6.2.2.8	toffoli_gate()	23
6.2.2.9	two_gate()	24
6.2.2.10	two_gate_display()	24
6.3	dspic33e/qcomp-sim-c.X/config.h File Reference	25
6.3.1	Detailed Description	25
6.4	dspic33e/qcomp-sim-c.X/consts.c File Reference	25

6.4.1	Detailed Description	26
6.4.2	Variable Documentation	26
6.4.2.1	H	26
6.4.2.2	rX	27
6.4.2.3	rXT	27
6.4.2.4	X	27
6.4.2.5	Y	28
6.4.2.6	Z	28
6.5	dspic33e/qcomp-sim-c.X/consts.h File Reference	28
6.5.1	Detailed Description	30
6.5.2	Variable Documentation	30
6.5.2.1	H	30
6.5.2.2	rX	30
6.5.2.3	rXT	31
6.5.2.4	X	31
6.5.2.5	Y	31
6.5.2.6	Z	31
6.6	dspic33e/qcomp-sim-c.X/display.c File Reference	32
6.6.1	Detailed Description	33
6.6.2	Macro Definition Documentation	33
6.6.2.1	NUM_MAX_AMPS	33
6.6.3	Function Documentation	33
6.6.3.1	display_average()	33
6.6.3.2	display_cycle()	34
6.6.3.3	remove_zero_amp_states()	35
6.6.3.4	sort_states()	35
6.7	dspic33e/qcomp-sim-c.X/display.h File Reference	36
6.7.1	Detailed Description	37
6.7.2	Function Documentation	37
6.7.2.1	display_average()	37

6.7.2.2	<code>display_cycle()</code>	38
6.7.2.3	<code>remove_zero_amp_states()</code>	39
6.7.2.4	<code>sort_states()</code>	39
6.8	<code>dspic33e/qcomp-sim-c.X/io.c</code> File Reference	40
6.8.1	Detailed Description	42
6.8.2	Function Documentation	42
6.8.2.1	<code>__attribute__()</code>	42
6.8.2.2	<code>add_to_cycle()</code>	43
6.8.2.3	<code>flash_all()</code>	43
6.8.2.4	<code>flash_led()</code>	43
6.8.2.5	<code>led_color_int()</code>	44
6.8.2.6	<code>led_cycle_test()</code>	44
6.8.2.7	<code>read_btn()</code>	44
6.8.2.8	<code>read_external_buttons()</code>	45
6.8.2.9	<code>read_func_btn()</code>	45
6.8.2.10	<code>read_qubit_btn()</code>	46
6.8.2.11	<code>reset_cycle()</code>	46
6.8.2.12	<code>set_external_led()</code>	46
6.8.2.13	<code>set_led()</code>	47
6.8.2.14	<code>set_strobe()</code>	47
6.8.2.15	<code>setup_external_buttons()</code>	48
6.8.2.16	<code>setup_external_leds()</code>	48
6.8.2.17	<code>setup_io()</code>	49
6.8.2.18	<code>TLC591x_mode_switch()</code>	49
6.8.2.19	<code>toggle_strobe()</code>	49
6.8.2.20	<code>update_display_buffer()</code>	50
6.8.2.21	<code>write_display_driver()</code>	50
6.8.3	Variable Documentation	51
6.8.3.1	<code>btn_func</code>	51
6.8.3.2	<code>btn_qubit</code>	51

6.8.3.3	buttons	51
6.8.3.4	isr_counter	51
6.8.3.5	led_global	51
6.9	dspic33e/qcomp-sim-c.X/io.h File Reference	52
6.9.1	Detailed Description	55
6.9.2	Function Documentation	55
6.9.2.1	add_to_cycle()	55
6.9.2.2	flash_all()	55
6.9.2.3	flash_led()	56
6.9.2.4	led_color_int()	56
6.9.2.5	led_cycle_test()	57
6.9.2.6	read_btn()	57
6.9.2.7	read_external_buttons()	57
6.9.2.8	read_func_btn()	58
6.9.2.9	read_qubit_btn()	58
6.9.2.10	reset_cycle()	59
6.9.2.11	set_external_led()	59
6.9.2.12	set_led()	59
6.9.2.13	set_strobe()	60
6.9.2.14	setup_external_buttons()	60
6.9.2.15	setup_external_leds()	61
6.9.2.16	setup_io()	61
6.9.2.17	toggle_strobe()	61
6.9.2.18	update_display_buffer()	62
6.9.2.19	write_display_driver()	63
6.10	dspic33e/qcomp-sim-c.X/main.c File Reference	63
6.10.1	Detailed Description	64
6.10.2	Function Documentation	65
6.10.2.1	main()	65
6.11	dspic33e/qcomp-sim-c.X/quantum.c File Reference	66

6.11.1	Detailed Description	67
6.11.2	Function Documentation	67
6.11.2.1	absolute()	67
6.11.2.2	controlled_qubit_op()	68
6.11.2.3	controlled_qubit_op_new()	68
6.11.2.4	mat_mul()	69
6.11.2.5	mat_mul_old()	69
6.11.2.6	pow2()	70
6.11.2.7	sign()	70
6.11.2.8	single_qubit_op()	70
6.11.2.9	single_qubit_op_new()	72
6.11.2.10	square_magnitude()	72
6.11.2.11	zero_state()	72
6.12	dspic33e/qcomp-sim-c.X/quantum.h File Reference	73
6.12.1	Detailed Description	74
6.12.2	Function Documentation	74
6.12.2.1	absolute()	74
6.12.2.2	controlled_qubit_op()	75
6.12.2.3	mat_mul()	76
6.12.2.4	pow2()	76
6.12.2.5	sign()	77
6.12.2.6	single_qubit_op()	77
6.12.2.7	square_magnitude()	78
6.12.2.8	zero_state()	79
6.13	dspic33e/qcomp-sim-c.X/spi.c File Reference	79
6.13.1	Detailed Description	80
6.13.2	Function Documentation	80
6.13.2.1	send_byte_spi_1()	80
6.13.2.2	setup_spi()	81
6.14	dspic33e/qcomp-sim-c.X/spi.h File Reference	82
6.14.1	Detailed Description	83
6.14.2	Function Documentation	83
6.14.2.1	send_byte_spi_1()	83
6.14.2.2	setup_spi()	83
6.15	dspic33e/qcomp-sim-c.X/time.c File Reference	85
6.15.1	Detailed Description	85
6.15.2	Function Documentation	86
6.15.2.1	setup_timer()	86
6.16	dspic33e/qcomp-sim-c.X/time.h File Reference	86
6.16.1	Detailed Description	87
6.16.2	Function Documentation	87
6.16.2.1	setup_timer()	87

Chapter 1

Todo List

Global `absolute` (Complex x)

Check that the complex part is small

Global `check_op` ()

this is a temp fix to avoid getting stuck waiting for a user input.

Global `controlled_qubit_op` (const Complex op[2][2], int ctrl, int targ, Complex state[])

This expression can probably be simplified or broken over lines. The condition for the if statement is that root+step and root + step + root_max contain 1 in the ctrl-th bit.

Global `display_average` (Complex state[])

Bring all constants out of the loops. Don't use pow.

Rewrite pow for Q15

rename to display_average

Global `led_cycle_test` (void)

This won't work now: write_display_driver(counter);

Global `main` (void)

fix this menu system

add a button for switching between display average and cycle modes

Global `mat_mul` (const Complex M[2][2], Complex V[], int i, int j)

Is static enough? Or should we declare outside the function?

Should we use for loops? Or is it better not to..?

Because of the way the array types work (you can't pass a multidimensional array of unknown size) we will also need a function for 4x4 matrix multiplication.

Global `mat_mul_old` (const Complex M[2][2], Complex V[], int i, int j)

Should these be outside the function?

Global `op_routine` (int select_qubit, int select_op, Complex state[])

not sure if the breaks are needed here, I don't think they are.

File `quantum.c`

split into a complex math and operator files

Global `read_external_buttons` (void)

read buttons

How long should this be?

button remappings...

Global `read_qubit_btn` (int btn)

should return a qubit number which has been selected

Global `repetition_code` (int q0, Complex state[])

this

generalise this, we should either have pseudo-random errors or the user should be able to choose which gates to do here

Global `reset_cycle` (void)

do it

Global `setup_external_leds` (void)

CURRENTLY CYCLING IS OFF

Global `setup_timer` ()

distinguish between the two different timers here...

Global `single_qubit_op` (const Complex op[2][2], int qubit, Complex state[])

Should we inline `mat_mul` here?

Global `single_qubit_op` (const Complex op[2][2], int qubit, Complex state[])

Should we inline `mat_mul` here?

Global `sort_states` (Complex state[], int num_qubits)

this function...

this

Global `square_magnitude` (Complex x)

Maybe we should inline this

Maybe we should inline this

Global `TLC591x_mode_switch` (int mode)

mode switcher for [LED](#) Driver

Global `toffoli_gate` (int q1, int q2, int q3, Complex state[])

Fancy non-blocking Interrupt routine { if(no button) return;

Global `write_display_driver` (void)

How long should this be?

Chapter 2

Bug List

Global `btn_func` [NUM_BTNS - NUM_QUBITS]

this.

Global `check_op` ()

same as above^

Global `check_qubit` ()

this probably shouldn't be an infinite loop. the counter lets the loop exit after some time to check if the 'reset' button is pressed

problem with sampling, will cause the program to hang while waiting for qubit input

Global `display_average` (Complex state[])

there is a phase bug when cycling the gates Loop over all qubits $k = 0, 1, 2, \dots, N-1$

The problem is with the sign function, which will not distinguish between (e.g.) 1 and i. I think all the problems stem from that kind of error. $c = \text{sign}(\text{state}[\text{root} + \text{step}]) - \text{sign}(\text{state}[\text{root} + \text{root_max} + \text{step}]);$

Chapter 3

Data Structure Index

3.1 Data Structures

Here are the data structures with brief descriptions:

BTN	Pin mappings	9
cycle_node	The basis for a linked list of states to cycle	10
LED	Each LED has the following type	10
LED_GLOBAL	Global LED strobing state parameter	11
RGB	A type for holding red, green, blue values	12

Chapter 4

File Index

4.1 File List

Here is a list of all documented files with brief descriptions:

dspic33e/qcomp-sim-c.X/ algo.c	
Contains quantum algorithms to be run	13
dspic33e/qcomp-sim-c.X/ algo.h	
Header file for algorithms	19
dspic33e/qcomp-sim-c.X/ config.h	
General config settings #pragma for microcontroller	25
dspic33e/qcomp-sim-c.X/ consts.c	
All (global) constants)	25
dspic33e/qcomp-sim-c.X/ consts.h	
Header file for (global) constants	28
dspic33e/qcomp-sim-c.X/ display.c	
For all the state display functions	32
dspic33e/qcomp-sim-c.X/ display.h	
Description: Header file containing all the functions for displaying the qubits state vector	36
dspic33e/qcomp-sim-c.X/ io.c	
Contains all the functions for reading buttons and writing to LEDs	40
dspic33e/qcomp-sim-c.X/ io.h	
Description: Header file for input output functions	52
dspic33e/qcomp-sim-c.X/ main.c	
The main function	63
dspic33e/qcomp-sim-c.X/ quantum.c	
Description: Contains matrix and vector arithmetic for simulating one qubit	66
dspic33e/qcomp-sim-c.X/ quantum.h	
Description: Header file containing all the matrix arithmetic for simulating a single qubit	73
dspic33e/qcomp-sim-c.X/ spi.c	
Description: Functions for communicating with serial devices	79
dspic33e/qcomp-sim-c.X/ spi.h	
Description: SPI communication functions	82
dspic33e/qcomp-sim-c.X/ time.c	
Description: Functions to control the on chip timers	85
dspic33e/qcomp-sim-c.X/ time.h	
Description: Header file containing all the timing functions	86

Chapter 5

Data Structure Documentation

5.1 BTN Struct Reference

pin mappings

```
#include <io.h>
```

Data Fields

- int **chip**
- int [line](#)
[chip number]

5.1.1 Detailed Description

pin mappings

```
// Pins for LE and OE on port D
// OE = RD4 = uC:81 = J1:28 = J10:14
// LE = RD3 = uC:78 = J1:40 = J11:18
//
// Pins for SH and CLK_INH on port D
// SH = RD5 = uC:82 = J1:25 = J10:13
// CLK_INH = RD8 = uC:68 = J1:58 = J11:25
//
```

button mapping type

The documentation for this struct was generated from the following file:


- dspic33e/qcomp-sim-c.X/[io.h](#)

5.2 cycle_node Struct Reference

The basis for a linked list of states to cycle.

```
#include <io.h>
```

Collaboration diagram for cycle_node:



Data Fields

- `RGB * rgb`
Array of corresponding `RGB` values.
- `int size`
The size of the above arrays.
- `struct cycle_node * next`
Pointer to the next item.
- `struct cycle_node * previous`
Pointer to the previous item.

5.2.1 Detailed Description

The basis for a linked list of states to cycle.

The documentation for this struct was generated from the following file:

- `dspic33e/qcomp-sim-c.X/io.h`

5.3 LED Struct Reference

Each `LED` has the following type.

```
#include <io.h>
```

Data Fields

- int **R** [2]
Red mapping array: [chip number, line number].
- int **G** [2]
Green mapping array.
- unsigned _Fract **N_R**
Blue mapping array.
- unsigned _Fract **N_G**
The R brightness.
- unsigned _Fract **N_B**
The G brightness.

5.3.1 Detailed Description

Each **LED** has the following type.

The type holds the information about the position of the **RGB** lines in the display driver array and also the brightness of the **RGB** lines. The counters are used by a timer interrupt service routine pulse the **RGB** LEDs at a specified rate.

The position of the **LED** lines are contained in an array

The type of the counter is *Fract* to facilitate easy comparison with the N^* variables which used the fractional type.

The documentation for this struct was generated from the following file:

- dspic33e/qcomp-sim-c.X/[io.h](#)

5.4 LED_GLOBAL Struct Reference

Global **LED** strobing state parameter.

```
#include <io.h>
```

Data Fields

- int **strobe_leds**
Bit set the LEDs which are strobing.
- int **strobe_state**
Bit zero is the current state (on/off)

5.4.1 Detailed Description

Global **LED** strobing state parameter.

The documentation for this struct was generated from the following file:

- dspic33e/qcomp-sim-c.X/[io.h](#)

5.5 RGB Struct Reference

A type for holding red, green, blue values.

```
#include <io.h>
```

Data Fields

- unsigned _Fract **R**
- unsigned _Fract **G**
- unsigned _Fract **B**

5.5.1 Detailed Description

A type for holding red, green, blue values.

The documentation for this struct was generated from the following file:

- dspic33e/qcomp-sim-c.X/[io.h](#)

Chapter 6


File Documentation

6.1 `dspic33e/qcomp-sim-c.X/`algo.c File Reference

Contains quantum algorithms to be run.

```
#include "algo.h"
```

Include dependency graph for algo.c:

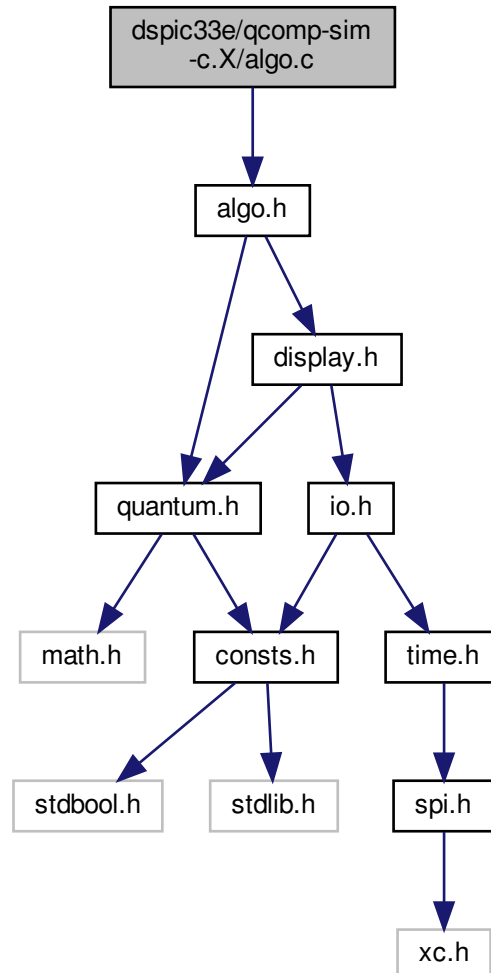

Functions

- void `op_routine` (int select_qubit, int select_op, `Complex` state[])
gate routine
- int `check_qubit` ()
function returns the integer for the label of which qubit is selected
- int `check_op` ()
End of qubit select.
- void `gate` (const `Complex` op[2][2], int qubit, `Complex` state[])
single qubit gate
- void `gate_display` (const `Complex` op[2][2], int qubit, `Complex` state[])
single qubit gate with display
- void `two_gate` (const `Complex` op[2][2], int ctrl, int targ, `Complex` state[])

- two-qubit gate*
- void `two_gate_display` (const `Complex` op[2][2], int ctrl, int targ, `Complex` state[])
- two-qubit gate with display*
- void `swap` (int q1, int q2, `Complex` state[])
- swap using 3 cNots*
- void `swap_test` (`Complex` state[])
- from tests.c*
- void `toffoli_gate` (int q1, int q2, int q3, `Complex` state[])
- QFT.*
- void `toffoli_test` (`Complex` state[])
- void `repetition_code` (int q0, `Complex` state[])
- repetition code*

6.1.1 Detailed Description

Contains quantum algorithms to be run.

Authors

J Scott, O Thomas

Date

Nov 2018

6.1.2 Function Documentation

6.1.2.1 `check_op()`

```
int check_op ( )
```

End of qubit select.

function returns integer label used in switch statement in main

Todo this is a temp fix to avoid getting stuck waiting for a user input.

6.1.2.2 check_qubit()

```
int check_qubit ( )
```

function returns the integer for the label of which qubit is selected

Returns

int select_qubit (-1 if no qubit is selected)

Bug problem with sampling, will cause the program to hang while waiting for qubit input

Bug this probably shouldn't be an infinite loop. the counter lets the loop exit after some time to check if the 'reset' button is pressed

6.1.2.3 gate()

```
void gate (
    const Complex op[2][2],
    int qubit,
    Complex state[] )
```

single qubit gate

perform single qubit gate does 2x2 operator on state vector

6.1.2.4 gate_display()

```
void gate_display (
    const Complex op[2][2],
    int qubit,
    Complex state[] )
```

single qubit gate with display

Display gates!!! does 2x2 operator on state vector displays the average state of the qubit by tracing over all waits to let the user see the state (LEDs)

6.1.2.5 op_routine()

```
void op_routine (
    int select_qubit,
    int select_op,
    Complex state[] )
```

gate routine

functions for performing gate routines, takes qubit & button ints

Todo not sure if the breaks are needed here, I don't think they are.

wait for target qubit to be selected

Do nothing

End of switch

6.1.2.6 repetition_code()

```
void repetition_code (
    int q0,
    Complex state[] )
```

repetition code

added repetition_code for bit flip errors, currently only shows a fixed error which is a failed X on one of the ancillas.

Todo this

```
///      a  b      c      d  e  f
/// |q2> ----X--|-----|-----X--o---
///      |  |      |      |      |
/// |q1> -X--|---|  U  |--X--|---o---
///      |  |      |      |      |
/// |q0> -o--o--|-----|--o--o--X-- |q0>
///
```

check position of 'q0' in the state, if the first qubit then q1, q2 are the next 2. e.g. q0=0 -> q1=1, q2=2

check if q0 is the last qubit then wrap so q1 is (q0-1) q2 is (q0-2)

else have q0 in the middle of q1 & q0

do the gates, without displaying the intermediate steps?

step a

step b

now up to U step c as a test I have hardcoded in only 2 X's corresponding to an error on q2

Todo generalise this, we should either have pseudo-random errors or the user should be able to choose which gates to do here

decoding steps d-f

step d

step e

step f

done!

6.1.2.7 swap_test()

```
void swap_test (
    Complex state[] )
```

from tests.c

swap for ever!

6.1.2.8 toffoli_gate()

```
void toffoli_gate (
    int q1,
    int q2,
    int q3,
    Complex state[] )
```

QFT.

Toffoli gate.

```
/// H Rz Rz -----
/// ---o--|---H Rz---
/// -----o-----o-H-
///
```

Todo Fancy non-blocking Interrupt routine { if(no button) return;

pause and do display cycling();

Make this a low priority interrupt so that everything else can interrupt it.

Do stuff for a while

return when you're done.

}Toffoli gate

```
/// -o-- -----o-----o-o-----
/// -|--- -----|-----|---|-----
/// -o-- = ---o--X--o--X--|-----
/// -|--- ---|-----|-----|-----
/// -X-- --rX----rX*---rX-----
///         a   b   c   d   e
///
```

q1 ctrl 1 q2 ctrl 2 q3 target < a

< b

< c

< d

< e

6.1.2.9 two_gate()

```
void two_gate (
    const Complex op[2][2],
    int ctrl,
    int targ,
    Complex state[] )
```

two-qubit gate

perform controlled single qubit gate does controlled 2x2 operator

6.1.2.10 two_gate_display()

```
void two_gate_display (
    const Complex op[2][2],
    int ctrl,
    int targ,
    Complex state[] )
```


two-qubit gate with display

does controlled 2x2 operator displays the state waits to let the user see the state


6.2 dspic33e/qcomp-sim-c.X/algo.h File Reference

header file for algorithms

```
#include "quantum.h"
#include "display.h"
Include dependency graph for algo.h:
```

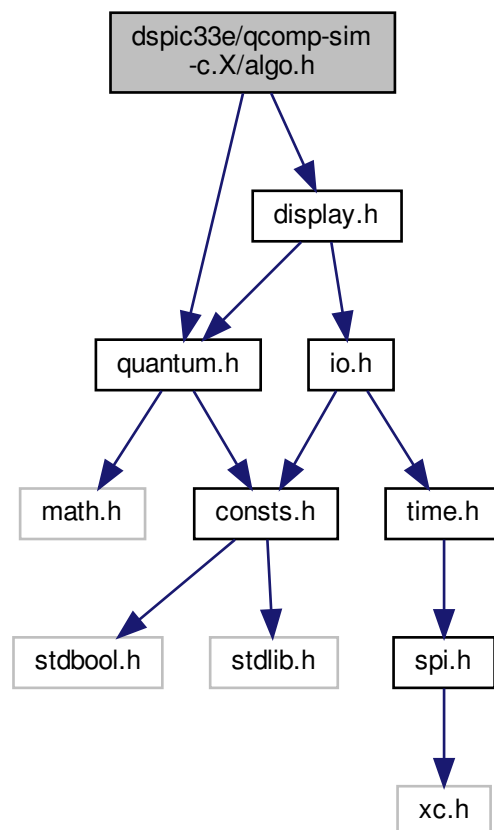

This graph shows which files directly or indirectly include this file:

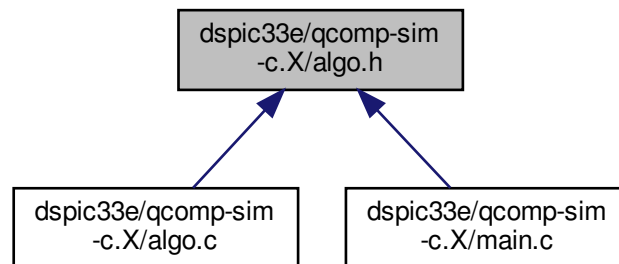

Functions

- void **op_routine** (int select_qubit, int select_op, **Complex** state[])
 - functions for performing gate routines, takes qubit & button ints*
- int **check_qubit** ()
 - function returns the integer for the label of which qubit is selected*
- int **check_op** ()
 - function returns integer label used in switch statement in main*
- void **gate** (const **Complex** op[2][2], int qubit, **Complex** state[])
 - perform single qubit gate*
- void **two_gate** (const **Complex** op[2][2], int ctrl, int targ, **Complex** state[])
 - perform controlled single qubit gate*
- void **gate_display** (const **Complex** op[2][2], int qubit, **Complex** state[])
 - Display gates!!!*
- void **two_gate_display** (const **Complex** op[2][2], int ctrl, int targ, **Complex** state[])
 - two-qubit gate with display*
- void **swap** (int q1, int q2, **Complex** state[])
 - swap using 3 cNots*
- void **swap_test** (**Complex** state[])
 - from tests.c*
- void **toffoli_gate** (int q1, int q2, int q3, **Complex** state[])
 - Toffoli gate.*
- void **toffoli_test** (**Complex** state[])
 -
- void **repetition_code** (int q0, **Complex** state[])
 - added repetition_code for bit flip errors, currently only shows a fixed error which is a failed X on one of the ancillas.*

6.2.1 Detailed Description

header file for algorithms

Authors

J Scott, O Thomas

Date

Nov 2018

6.2.2 Function Documentation

6.2.2.1 check_op()

```
int check_op ( )
```

function returns integer label used in switch statement in main

Bug same as above^

function returns integer label used in switch statement in main

Todo this is a temp fix to avoid getting stuck waiting for a user input.

6.2.2.2 check_qubit()

```
int check_qubit ( )
```

function returns the integer for the label of which qubit is selected

Returns

int select_qubit (-1 if no qubit is selected)

Bug problem with sampling, will cause the program to hang while waiting for qubit input

Bug this probably shouldn't be an infinite loop. the counter lets the loop exit after some time to check if the 'reset' button is pressed

6.2.2.3 gate()

```
void gate (
    const Complex op[2][2],
    int qubit,
    Complex state[] )
```

perform single qubit gate

perform single qubit gate does 2x2 operator on state vector

6.2.2.4 gate_display()

```
void gate_display (
    const Complex op[2][2],
    int qubit,
    Complex state[] )
```

Display gates!!!

Display gates!!! does 2x2 operator on state vector displays the average state of the qubit by tracing over all waits to let the user see the state (LEDs)

6.2.2.5 op_routine()

```
void op_routine (
    int select_qubit,
    int select_op,
    Complex state[] )
```

functions for performing gate routines, takes qubit & button ints

functions for performing gate routines, takes qubit & button ints

Todo not sure if the breaks are needed here, I don't think they are.

wait for target qubit to be selected

Do nothing

End of switch

6.2.2.6 repetition_code()

```
void repetition_code (
    int q0,
    Complex state[] )
```

added repetition_code for bit flip errors, currently only shows a fixed error which is a failed X on one of the ancillas.

todo.

added repetition_code for bit flip errors, currently only shows a fixed error which is a failed X on one of the ancillas.

Todo this

```
///      a  b      c      d  e  f
/// |q2> ----X--|-----|-----X--o--
///      |  |      |      |  |
/// |q1> -X--|--|  U  |--X--|--o--
///      |  |  |      |  |  |
/// |q0> -o--o--|-----|--o--o--X-- |q0>
///
```


check position of 'q0' in the state, if the first qubit then q1, q2 are the next 2. e.g. q0=0 -> q1=1, q2=2

check if q0 is the last qubit then wrap so q1 is (q0-1) q2 is (q0-2)

else have q0 in the middle of q1 & q0

do the gates, without displaying the intermediate steps?

step a

step b

now up to U step c as a test I have hardcoded in only 2 X's corresponding to an error on q2

Todo generalise this, we should either have pseudo-random errors or the user should be able to choose which gates to do here

decoding steps d-f

step d

step e

step f

done!

6.2.2.7 swap_test()

```
void swap_test (
    Complex state[] )
```

from tests.c

swap for ever!

6.2.2.8 toffoli_gate()

```
void toffoli_gate (
    int q1,
    int q2,
    int q3,
    Complex state[] )
```

Toffoli gate.

Toffoli gate.

```
/// H Rz Rz -----
/// ---o--|---H Rz---
/// -----o-----o-H-
///
```

Todo Fancy non-blocking Interrupt routine { if(no button) return;

pause and do display cycling();

Make this a low priority interrupt so that everything else can interrupt it.

Do stuff for a while

return when you're done.

}Toffoli gate

```

///  -o--  -----o-----o-o-----
///  -|--  -----|-----|---|-----
///  -o-- = ---o--X--o--X--|-----
///  -|--  ---|-----|-----|-----
///  -X--  --rX-----rX*---rX-----
///          a    b    c    d    e
///

```

q1 ctrl 1 q2 ctrl 2 q3 target < a

< b

< c

< d

< e

6.2.2.9 two_gate()

```

void two_gate (
    const Complex op[2][2],
    int ctrl,
    int targ,
    Complex state[] )

```

perform controlled single qubit gate

perform controlled single qubit gate does controlled 2x2 operator

6.2.2.10 two_gate_display()

```

void two_gate_display (
    const Complex op[2][2],
    int ctrl,
    int targ,
    Complex state[] )

```


two-qubit gate with display

does controlled 2x2 operator displays the state waits to let the user see the state

6.3 dspic33e/qcomp-sim-c.X/config.h File Reference

General config settings #pragma for microcontroller.

This graph shows which files directly or indirectly include this file:



6.3.1 Detailed Description

General config settings #pragma for microcontroller.

Authors

J Scott, O Thomas

Date

Nov 2018


Description: Include this once at the top of main

6.4 dspic33e/qcomp-sim-c.X/consts.c File Reference

contains all (global) constants)

```
#include "consts.h"
```

Include dependency graph for consts.c:

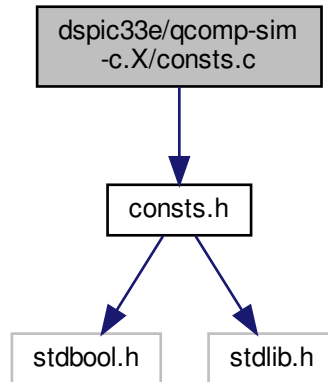

Variables

- const [Complex rX](#) [2][2]
- const [Complex rXT](#) [2][2]
- const [Complex X](#) [2][2]
- const [Complex Y](#) [2][2]
- const [Complex Z](#) [2][2]
- const [Complex H](#) [2][2]

6.4.1 Detailed Description

contains all (global) constants)

Authors

J Scott, O Thomas

Date

Nov 2018

6.4.2 Variable Documentation

6.4.2.1 H

```
const Complex H[2][2]
```

Initial value:

```
= {{ {0.7071067812, 0.0}, {0.7071067812, 0.0}},
    {{0.7071067812, 0.0}, {-0.7071067812, 0.0}} }
```

Parameters

H	Hadamard gate
-----	---------------

6.4.2.2 rX

```
const Complex rX[2][2]
```

Initial value:

```
= {{0.5, 0.5},{0.5, -0.5}},
   {{0.5, -0.5},{0.5, 0.5}}
```

Parameters

rX	sqrt X gate (0.5+0.5i 0.5-0.5i) (0.5-0.5i 0.5+0.5i)
------	---

6.4.2.3 rXT

```
const Complex rXT[2][2]
```

Initial value:

```
= {{0.5, -0.5},{0.5, 0.5}},
   {{0.5, 0.5},{0.5, -0.5}}
```

Parameters

rXT	Adjoint of rX
-------	-----------------

6.4.2.4 X

```
const Complex X[2][2]
```

Initial value:

```
= {{0.0, 0.0},{ONE_Q15, 0.0}},
   {{ONE_Q15, 0.0},{0.0, 0.0}}
```

Parameters

X	Pauli X gate
---	--------------

6.4.2.5 Y

```
const Complex Y[2][2]
```

Initial value:

```
= {{{0.0, 0.0}, {0.0, -1.0}},
    {{0.0, ONE_Q15}, {0.0, 0.0}}}
```

Parameters

Y	Pauli y gate
---	--------------

6.4.2.6 Z

```
const Complex Z[2][2]
```

Initial value:

```
= {{{ONE_Q15, 0.0}, {0.0, 0.0}},
    {{0.0, 0.0}, {-1.0, 0.0}}}
```

Parameters


Z	Pauli z gate
---	--------------

6.5 dspic33e/qcomp-sim-c.X/consts.h File Reference


header file for (global) constants

```
#include <stdbool.h>
#include <stdlib.h>
```

Include dependency graph for consts.h:



This graph shows which files directly or indirectly include this file:

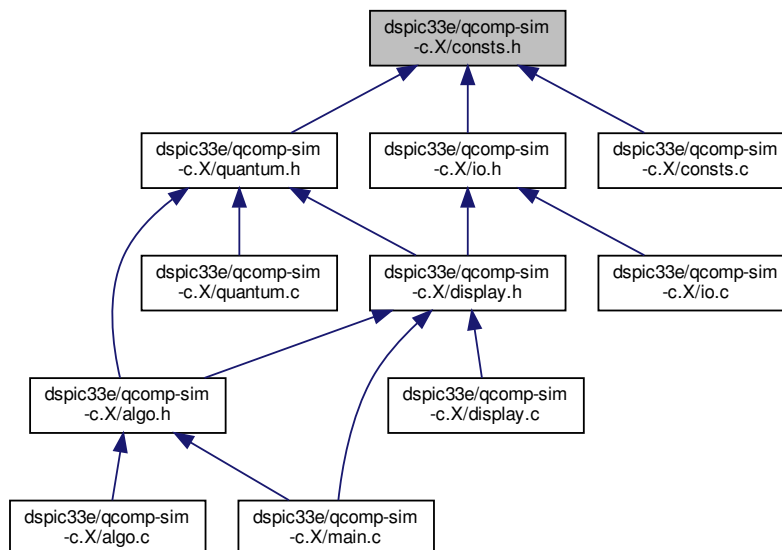

Macros

- #define **NUM_QUBITS** 4
- #define **STATE_LENGTH** 16
- #define **FULL_PHASE** 0.124996185
- #define **HALF_PHASE** 0.062498093
- #define **LED_NUM** 4
The number of external LEDs.
- #define **NUM_BTNS** 9
number of total buttons
- #define **ONE_Q15** 0.9999694824
- #define **BTN_CHIP_NUM** 2

Typedefs

- typedef signed _Fract [Q15](#)
Basic fractional time.
- typedef [Q15 Complex](#)[2]
Complex type.

Variables

- const [Complex](#) rX [2][2]
- const [Complex](#) rXT [2][2]
- const [Complex](#) X [2][2]
- const [Complex](#) Y [2][2]
- const [Complex](#) Z [2][2]
- const [Complex](#) H [2][2]

6.5.1 Detailed Description

header file for (global) constants

Authors

J Scott, O Thomas

Date

Nov 2018

6.5.2 Variable Documentation

6.5.2.1 H

```
const Complex H[2][2]
```

Parameters

<i>H</i>	Hadamard gate
----------	---------------

6.5.2.2 rX

```
const Complex rX[2][2]
```


Parameters

rX	is square root of X
rX	sqrt X gate ($0.5+0.5i$ $0.5-0.5i$) ($0.5-0.5i$ $0.5+0.5i$)

6.5.2.3 rXT

```
const Complex rXT[2][2]
```

Parameters

rXT	Adjoint of rX
-------	-----------------

6.5.2.4 X

```
const Complex X[2][2]
```

Parameters

X	pauli X gate
-----	----------------

6.5.2.5 Y

```
const Complex Y[2][2]
```

Parameters

Y	Pauli y gate
-----	----------------

6.5.2.6 Z

```
const Complex Z[2][2]
```


Parameters

Z	Pauli z gate
-----	----------------

6.6 dspic33e/qcomp-sim-c.X/display.c File Reference

for all the state display functions

```
#include "display.h"
Include dependency graph for display.c:
```

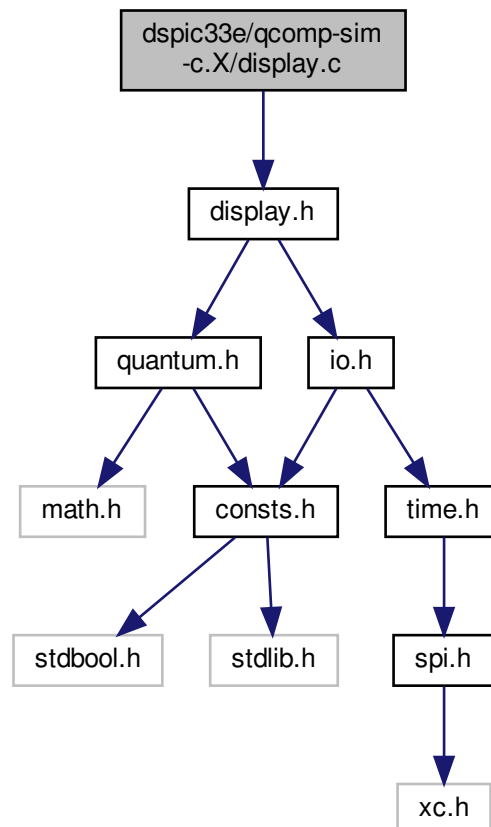

Macros

- `#define NUM_MAX_AMPS 4`

Functions

- void `display_average` (Complex state[])
Display the state amplitudes on LEDs.
- void `display_cycle` (Complex state[])
cycles through the non-zero amplitude states
- int `sort_states` (Complex state[], int num_qubits)
- int `remove_zero_amp_states` (Complex state[], int disp_state[])
takes state vector, number of qubits and vector to write the nonzero elements of the statevector to.

6.6.1 Detailed Description

for all the state display functions

6.6.2 Macro Definition Documentation

6.6.2.1 NUM_MAX_AMPS

```
#define NUM_MAX_AMPS 4
```

Parameters

<i>state</i>	The state vector
<i>num_qubits</i>	The number of qubits in the state vector

Returns

This function finds the amplitude of the state vector with the largest magnitude.

6.6.3 Function Documentation

6.6.3.1 display_average()

```
void display_average (
    Complex state[] )
```

Display the state amplitudes on LEDs.

Parameters

<i>state</i>	Pass in the state vector
--------------	--------------------------

Note

Currently the function only displays superpositions using the red and blue colors.

Todo Bring all constants out of the loops. Don't use pow.

Bug there is a phase bug when cycling the gates Loop over all qubits $k = 0, 1, 2, \dots N-1$

Compute powers of 2

ROOT loop: starts at 0, increases in steps of 1

STEP loop: starts at 0, increases in steps of $2^{(k+1)}$

Bug The problem is with the sign function, which will not distinguish between (e.g.) 1 and i. I think all the problems stem from that kind of error. `c = sign(state[root + step]) - sign(state[root + root_max + step]);`

Compute two temporary variables to check real and imag signs

Set `c = 1` if there is a phase difference in either `r` or `i`

`if(c==1 || c==3 || c==2)`

Zeros are at the index `root + step`

Todo Rewrite `pow` for Q15

Ones are at the index `root + 2^k + step`

write phase update leds for each qubits average zero and one amps

6.6.3.2 `display_cycle()`

```
void display_cycle (
    Complex state[] )
```

cycles through the non-zero amplitude states

Parameters

<code>state</code>	The state to display
<code>N</code>	The length of the state vector

Filter the state

Allocate **RGB** array

Decode

Look at the `j`th bit

Reset the cycle

Each iteration of this loop writes

Loop here to add stuff

6.6.3.3 remove_zero_amp_states()

```
int remove_zero_amp_states (
    Complex state[],
    int disp_state[] )
```

takes state vector, number of qubits and vector to write the nonzero elements of the statevector to.

updates disp_state where the first 'return value of the function' elements are the nonzero elements of the state vector 'state'

the disp_state elements are the nonzero elements of the state

```
/// e.g. state = (00) = (1/r2) (Bell state)
///              (01)  ( 0 )
///              (10)  ( 0 )
///              (11)  (1/r2)
/// Then displ_state would have 2 elements
/// disp_state = (0) standing for (00)
///              (3)              (11)
///
```

Note

we have to allocate disp_state to be the size of state, the function returns count which tells us the first 'count' elements of disp_state to use. In the Bell state example there are 2 values in disp_state, 0 & 3, count is returned as 3 which means take the first count-1 elements (in this case 2) of disp_state which is 0,1 which is the correct elements

6.6.3.4 sort_states()

```
int sort_states (
    Complex state[],
    int num_qubits )
```

Todo this

Todo this function...


6.7 dspic33e/qcomp-sim-c.X/display.h File Reference

Description: Header file containing all the functions for displaying the qubits state vector.


```
#include "quantum.h"
```

```
#include "io.h"
```

Include dependency graph for display.h:

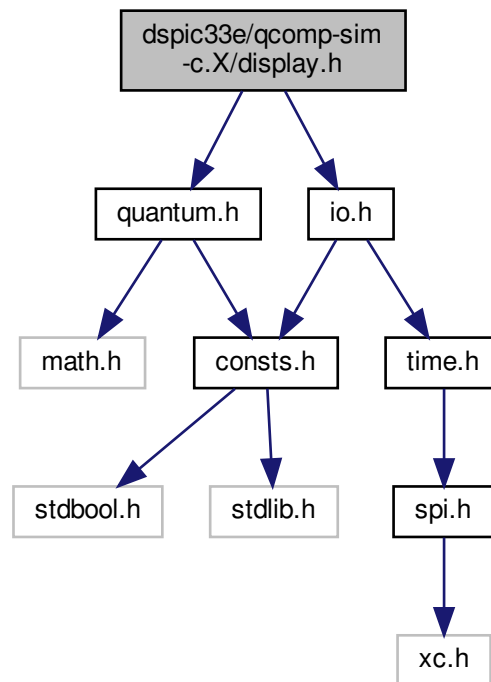

This graph shows which files directly or indirectly include this file:

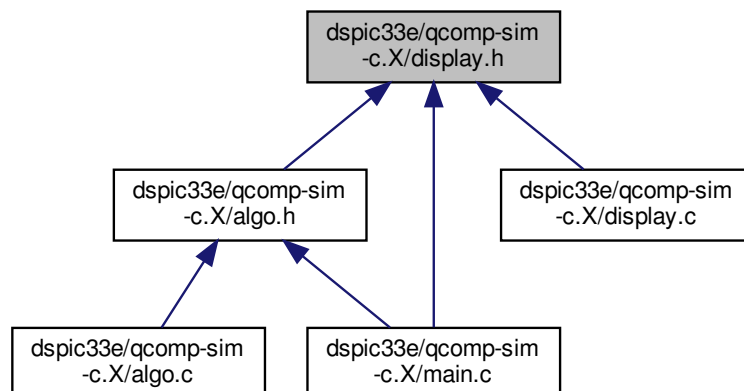

Functions

- void `display_average` (`Complex` state[])
Display the state amplitudes on LEDs.
- void `display_cycle` (`Complex` state[])
cycles through the non-zero amplitude states
- int `remove_zero_amp_states` (`Complex` state[], int disp_state[])
updates disp_state where the first 'return value of the function' elements are the nonzero elements of the state vector 'state'
- int `sort_states` (`Complex` state[], int num_qubits)

6.7.1 Detailed Description

Description: Header file containing all the functions for displaying the qubits state vector.

Authors

J Scott, O Thomas

Date

Nov 2018

6.7.2 Function Documentation

6.7.2.1 `display_average()`

```
void display_average (
    Complex state[] )
```

Display the state amplitudes on LEDs.

Parameters

<i>state</i>	Pass in the state vector
--------------	--------------------------

Note

Currently the function only displays superpositions using the red and blue colors.

Todo rename to `display_average`

Parameters

<i>state</i>	Pass in the state vector
--------------	--------------------------

Note

Currently the function only displays superpositions using the red and blue colors.

Todo Bring all constants out of the loops. Don't use pow.

Bug there is a phase bug when cycling the gates Loop over all qubits $k = 0, 1, 2, \dots N-1$

Compute powers of 2

ROOT loop: starts at 0, increases in steps of 1

STEP loop: starts at 0, increases in steps of $2^{(k+1)}$

Bug The problem is with the sign function, which will not distinguish between (e.g.) 1 and i. I think all the problems stem from that kind of error. $c = \text{sign}(\text{state}[\text{root} + \text{step}]) - \text{sign}(\text{state}[\text{root} + \text{root_max} + \text{step}]);$

Compute two temporary variables to check real and imag signs

Set $c = 1$ if there is a phase difference in either r or i

$\text{if}(c==1 \ || \ c==3 \ || \ c==2)$

Zeros are at the index $\text{root} + \text{step}$

Todo Rewrite pow for Q15

Ones are at the index $\text{root} + 2^k + \text{step}$

write phase update leds for each qubits average zero and one amps

6.7.2.2 display_cycle()

```
void display_cycle (
    Complex state[] )
```

cycles through the non-zero amplitude states

Parameters

<i>state</i>	The state to display
<i>N</i>	The length of the state vector

Filter the state

Allocate RGB array

Decode

Look at the jth bit

Reset the cycle

Each iteration of this loop writes

Loop here to add stuff

6.7.2.3 remove_zero_amp_states()

```
int remove_zero_amp_states (
    Complex state[],
    int disp_state[] )
```

updates disp_state where the first 'return value of the function'elements are the nonzero elements of the state vector 'state'

Parameters

<i>state</i>	complex state vector in
<i>disp_state</i>	complex inout vector where the first n entries are the nonzero elements of 'state'

Returns

returns the number of elements to look at in disp_state.

updates disp_state where the first 'return value of the function'elements are the nonzero elements of the state vector 'state'

the disp_state elements are the nonzero elements of the state

```
/// e.g. state = (00) = (1/r2) (Bell state)
///              (01)  ( 0 )
///              (10)  ( 0 )
///              (11)  (1/r2)
/// Then displ_state would have 2 elements
/// disp_state = (0) standing for (00)
///              (3)              (11)
///
```

Note

we have to allocate disp_state to be the size of state, the function returns count which tells us the first 'count' elements of disp_state to use. In the Bell state example there are 2 values in disp_state, 0 & 3, count is returned as 3 which means take the first count-1 elements (in this case 2) of disp_state which is 0,1 which is the correct elements

6.7.2.4 sort_states()

```
int sort_states (
    Complex state[],
    int num_qubits )
```

Todo this


Todo this function...

6.8 dspic33e/qcomp-sim-c.X/io.c File Reference

Contains all the functions for reading buttons and writing to LEDs.

```
#include "io.h"
```

Include dependency graph for io.c:

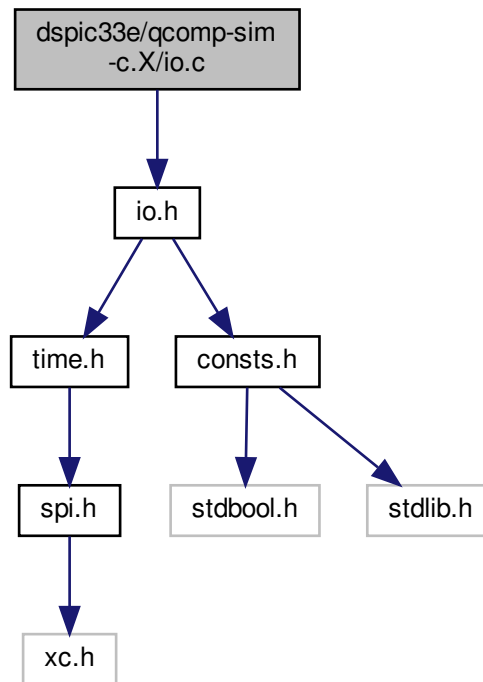

Macros

- `#define DISPLAY_CHIP_NUM 2`
- `#define MAX_CYCLE_LENGTH 16`
- `#define PERIOD 500000`

Functions

- `int led_color_int (int device, int R, int G, int B)`
Takes led number & RGB -> returns integer for sending via SPI to set the LED.
- `int setup_io (void)`
Set up LEDs and buttons on port D.
- `void __attribute__((__interrupt__, no_auto_psv))`
The max value for isr_counter.
- `void setup_external_buttons (void)`
<— Global in this file

- int [read_qubit_btn](#) (int btn)
Read the state of a qubit button.
- int [read_func_btn](#) (int btn)
Read the state of a qubit button.
- void [setup_external_leds](#) (void)
Set external variable [RGB](#) LEDs.
- int [add_to_cycle](#) ([RGB](#) colors[], int size)
Add an item to the list of states to cycle.
- int [reset_cycle](#) (void)
Reset the [LED](#) display cycle_.*
- void [stop_external_leds](#) (void)
Stop LEDs flashing.
- void [set_strobe](#) (int color, int state)
Set an [LED](#) strobing.
- void [toggle_strobe](#) (int color)
Toggle [LED](#) strobe.
- int [set_led](#) (int color, int state)
Turn a particular [LED](#) on or off.
- int [read_btn](#) (int btn)
Read the state of a push button.
- void [leds_off](#) (void)
Turn all the LEDs off.
- void [flash_led](#) (int color, int number)
Flash [LED](#) a number of times.
- void [flash_all](#) (int number)
Flash all the LEDs a number of times.
- int [update_display_buffer](#) (int n, bool R, bool G, bool B)
- int [write_display_driver](#) (void)
Turn on an [LED](#) via the external display driver.
- int [TLC591x_mode_switch](#) (int mode)
Switch between normal and special mode.
- int [set_external_led](#) (int index, unsigned _Fract R, unsigned _Fract G, unsigned _Fract B)
Updates color properties of global led array.
- int [read_external_buttons](#) (void)
Read external buttons.
- int [led_cycle_test](#) (void)
Loop to cycle through LEDs 0 - 15.
- void [varying_leds](#) (void)
Routine to test the [set_external_led](#) function.

Variables

- int [buttons](#) [BTN_CHIP_NUM]
Contains the button states.
- [LED_GLOBAL](#) [led_global](#) = {0}
- [LED](#) [led](#) [[LED_NUM](#)]
The [LED](#) array – global in this file.
- int [display_buf](#) [[DISPLAY_CHIP_NUM](#)] = {0}
Display buffer to be written to display driver.
- unsigned _Fract [isr_counter](#) = 0

- Counter for the interrupt service routine `_T5Interrupt`.
- unsigned `_Fract isr_res` = 0.01
- Counter value.
- const unsigned `_Fract isr_limit` = 0.95
- Counter resolution.
- `RGB cycle_colors` [MAX_CYCLE_LENGTH][NUM_QUBITS]
- int `last_row` = 0
- int `cycle_counter` = 0
- `BTN btn_qubit` [NUM_QUBITS]
- button mapping 1st byte 00000100 btn A26-28 -> logical 0 00000010 btn A7-9 -> logical 6 00000001 btn A4-6 -> logical 7 00001000 btn A1-3 -> logical 8
- `BTN btn_func` [NUM_BTNS - NUM_QUBITS]
- <— Global in this file

6.8.1 Detailed Description

Contains all the functions for reading buttons and writing to LEDs.

Authors

J Scott, O Thomas

Date

Nov 2018

6.8.2 Function Documentation

6.8.2.1 `__attribute__()`

```
void __attribute__ (
    (__interrupt__, no_auto_psv) )
```

The max value for `isr_counter`.

Timer 6 and 7 for cycling superposition states.

Interrupt service routine for timer 4

Interrupt service routines are automatically called by the microcontroller when an event occurs. In this case, `_T5Interrupt` is called when the 32 bit timer formed from T4 and T5 reaches its preset period. The silly name and sill attributes are so that the compiler can correctly map the function in the microcontroller memory. More details of interrupts and interrupt vectors can be found in the compiler manual and the dsPIC33E datasheet.

The job of this routine is to control the modulated brightnesses of the RBG LEDs. This routine is set to be called periodically with a very long period on the time scale of microcontroller operations, but very fast in comparison to what the eye can see. For example, once every 100us. Loop over all the LEDs (the index i).

Decide whether R, G or B should be turned off

Write the display buffer data to the display drivers It's important this line goes here rather than after the the final `update_display_buffer` below. Otherwise you get a flicker due to the LEDs all coming on at the start of this loop

Reset the counter

Turn on all the LEDs back on

Write a row to the leds

6.8.2.2 add_to_cycle()

```
int add_to_cycle (
    RGB colors[],
    int size )
```

Add an item to the list of states to cycle.

Add an element to the states to be cycled.

Parameters

<i>leds</i>	An array of LED indices
<i>colors</i>	Corresponding RGB values for each LED
<i>size</i>	The size of both the above arrays

This function is used to add a set of LED states (RGB values) into the list of states being cycled.

Repeatedly calling this function adds a new state to the end of the list of displayed states. LED states are shown in the order this function is called.

The implementation uses the linked list type `cycle_node`. Each call of this function adds a new element to the end of cycle node Add the new colors to top of array

6.8.2.3 flash_all()

```
void flash_all (
    int number )
```

Flash all the LEDs a number of times.

Parameters

<i>number</i>	
---------------	--

6.8.2.4 flash_led()

```
void flash_led (
    int color,
    int number )
```

Flash LED a number of times.

Flash one LED a number of times.

6.8.2.5 led_color_int()

```
int led_color_int (
    int device,
    int R,
    int G,
    int B )
```

Takes led number & **RGB** -> returns integer for sending via SPI to set the **LED**.

Parameters

<i>device</i>	input LED number to change
<i>R</i>	red value between 0 & 1
<i>G</i>	green value between 0 & 1
<i>B</i>	blue value between 0 & 1

Returns

Returns int to be sent to **LED** Driver

convention **RGB** -> 000

Each **LED** takes 3 lines, assumes there are no gaps between **LED** channels "device" goes between 0 to $2^n - 1$

6.8.2.6 led_cycle_test()

```
int led_cycle_test (
    void )
```

Loop to cycle through LEDs 0 - 15.

Todo This won't work now: write_display_driver(counter);

6.8.2.7 read_btn()

```
int read_btn (
    int btn )
```

Read the state of a push button.

Parameters

<i>btn</i>	
------------	--

Note

How well do you know C

6.8.2.8 read_external_buttons()

```
int read_external_buttons (
    void )
```

Read external buttons.

Update the buttons array (see declaration above)

The external buttons are interfaced to the microcontroller via a shift register. Data is shifted in a byte at a time using the SPI 3 module. The sequence to read the buttons is as follows:

1) Momentarily bring SH low to latch button data into the shift registers 2) Bring CLK_INH low to enable the clock input on the shift register 3) Start the SPI 3 clock and read data in via the SDI 3 line

The control lines SH and CLK_INH are on port D

Todo read buttons

SH pin

Todo How long should this be?

Todo button remappings...

6.8.2.9 read_func_btn()

```
int read_func_btn (
    int btn )
```

Read the state of a qubit button.

Parameters

<i>btn</i>	The index of the button to read
------------	---------------------------------

Returns

the state of the button – 1 if pressed, 0 if not

The button state is in the buttons array Each element of that array is a byte Get the relevant byte

Retrieve the value of the right bit

Return the button state

6.8.2.10 read_qubit_btn()

```
int read_qubit_btn (
    int btn )
```

Read the state of a qubit button.

Parameters

<i>btn</i>	The index of the button to read
------------	---------------------------------

Returns

the state of the button – 1 if pressed, 0 if not

Todo should return a qubit number which has been selected

The button state is in the buttons array Each element of that array is a byte Get the relevant byte

Retrieve the value of the right bit

Return the button state

6.8.2.11 reset_cycle()

```
int reset_cycle (
    void )
```

Reset the **LED** display cycle _*.

Reset the display cycle. Called before adding anything.

Todo do it

6.8.2.12 set_external_led()

```
int set_external_led (
    int index,
    unsigned _Fract R,
    unsigned _Fract G,
    unsigned _Fract B )
```

Updates color properties of global led array.

Parameters

<i>led_index</i>	
<i>R</i>	red value between 0 & 1
<i>G</i>	green value between 0 & 1
<i>B</i>	blue value between 0 & 1

Returns

0 if successful, -1 otherwise

Use the function to set the [RGB](#) level of an [LED](#). The [LED](#) is chosen using the

Parameters

<i>led_index.</i>	The
<i>R</i>	

6.8.2.13 `set_led()`

```
int set_led (
    int color,
    int state )
```

Turn a particular [LED](#) on or off.

Parameters

<i>color</i>	
<i>state</i>	

6.8.2.14 `set_strobe()`

```
void set_strobe (
    int color,
    int state )
```

Set an [LED](#) strobing.

Parameters

<i>color</i>	
<i>state</i>	

6.8.2.15 setup_external_buttons()

```
void setup_external_buttons (  
    void )
```

<— Global in this file

All the setup for external buttons.

All the setup for external buttons For the qubits

logical 0

logical 1

logical 2

logical 3

For the function buttons

logical 4

logical 5

logical 6

logical 7

logical 8

6.8.2.16 setup_external_leds()

```
void setup_external_leds (  
    void )
```

Set external variable **RGB** LEDs.

Initialise **LED** lines

Initialise parameters to zero

Initialise display buffer to zero

Set flashing period

Turn timer 6 on

Todo CURRENTLY CYCLING IS OFF

6.8.2.17 `setup_io()`

```
int setup_io (
    void )
```

Set up LEDs and buttons on port D.

< Set port c digital for spi3

Set the OE pin high

Set OE(ED2) pin

Set the SH pin high

Set SH pin

set CLK_INH high while buttons are pressed

6.8.2.18 `TLC591x_mode_switch()`

```
int TLC591x_mode_switch (
    int mode )
```

Switch between normal and special mode.

The mode switch for the TLC591x chip is a bit tricky because it involves synchronising the control lines [LE\(ED1\)](#) and OE(ED2) on Port D with the SPI 1 clock. To initiate a mode switch, OE(ED2) must be brought low for one clock cycle, and then the value of [LE\(ED1\)](#) two clock cycles later determines the new mode. See the diagrams on page 19 of the datasheet

So long as the timing is not strict, we can probably implement the mode switch by starting a non-blocking transfer of 1 byte to the device (which starts the SPI 1 clock), followed by clearing OE(ED2) momentarily and then setting the value of [LE\(ED1\)](#) as required. So long as those two things happen before the SPI 1 clock finishes the procedure will probably work. (The reason is the lack of max timing parameters on page 9 for the setup and hold time for ED1 and ED2, which can therefore presumably be longer than one clock cycle.)

Parameters

<i>mode</i>	
-------------	--

Todo mode switcher for [LED](#) Driver

6.8.2.19 `toggle_strobe()`

```
void toggle_strobe (
    int color )
```

Toggle [LED](#) strobe.

Parameters

<i>color</i>	
--------------	--

6.8.2.20 update_display_buffer()

```
int update_display_buffer (
    int n,
    bool R,
    bool G,
    bool B )
```

Parameters

<i>index</i>	LED number to modify
<i>R</i>	Intended value of the R led
<i>G</i>	Intended value of the G led
<i>B</i>	Intended value of the B led

Returns

0 if successful

Could this get any worse!

This function is supposed to make the display writing process more efficient. It updates a global display buffer which is written periodically to the led display drivers. Instead of the display driver function re-reading the desired state of all the LED lines every time it is called, this function can be used to update only the lines that have changed.

There are quite a few potential bugs in here, mainly array out of bounds if the DISPLAY_CHIP_NUM is not set correctly or the LED RGB lines are wrong. (Or if there are just bugs.) Set or clear the red LED of the nth LED

Set or clear the red LED of the nth LED

Set or clear the red LED of the nth LED

6.8.2.21 write_display_driver()

```
int write_display_driver (
    void )
```

Turn on an LED via the external display driver.

Send a byte to the display driver.

On power on, the chip (TLC591x) is in normal mode which means that the clocked bytes sent to the chip set which LEDs are on and which are off (as opposed to setting the current of the LEDs)

To write to the device, use the SPI module to write a byte to the SDI 1 pin on the chip. Then momentarily set the LE(ED1) pin to latch the data onto the output register. Finally, bring the OE(ED2) pin low to enable the current sinking to turn on the LEDs. See the timing diagram on page 17 of the datasheet for details.

LE(ED1) and OE(ED2) will be on Port D Set LE(ED1) pin

Todo How long should this be?

6.8.3 Variable Documentation

6.8.3.1 btn_func

```
BTN btn_func[NUM_BTNS - NUM_QUBITS]
```

<— Global in this file

Bug this.

6.8.3.2 btn_qubit

```
BTN btn_qubit[NUM_QUBITS]
```

button mapping 1st byte 00000100 btn A26-28 -> logical 0 00000010 btn A7-9 -> logical 6 00000001 btn A4-6 -> logical 7 00001000 btn A1-3 -> logical 8

2nd byte 10000000 btn A23-25 -> logical 1 00000010 btn A20-22 -> logical 2 00000100 btn A17-19 -> logical 3 00000001 btn A13-15 -> logical 4 00001000 btn A10-12 -> logical 5

6.8.3.3 buttons

```
int buttons[BTN_CHIP_NUM]
```

Contains the button states.

Each entry in the array is either 1 if the button is pressed or 0 if not. The array is accessed globally using 'extern buttons;' in a *.c file. Read buttons array us updated by calling read_external_buttons

6.8.3.4 isr_counter

```
unsigned _Fract isr_counter = 0
```

Counter for the interrupt service routine _T5Interrupt.

These variables are for keeping track of the interrupt based [LED](#) pulsing. The type is _Fract because it is easier to directly compare two _Fracts than attempt multiplication of integers and _Fracts (which isn't supported) The limit is not 1 because _Fract types do not go up to 1.

It's probably a good idea to make sure the isr_res counter doesn't overflow (by ensuring that isr_res + isr_limit does not exceed 0.999..., the max value of unsigned _Fract).

6.8.3.5 led_global

```
LED_GLOBAL led_global = {0}
```


Parameters

<code>led_global</code>	Global LED strobing state parameter
-------------------------	---


6.9 dspic33e/qcomp-sim-c.X/io.h File Reference

Description: Header file for input output functions.

```
#include "time.h"
#include "consts.h"
Include dependency graph for io.h:
```

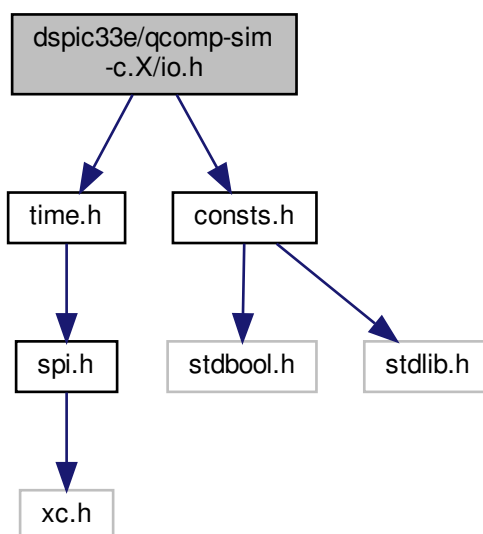

This graph shows which files directly or indirectly include this file:

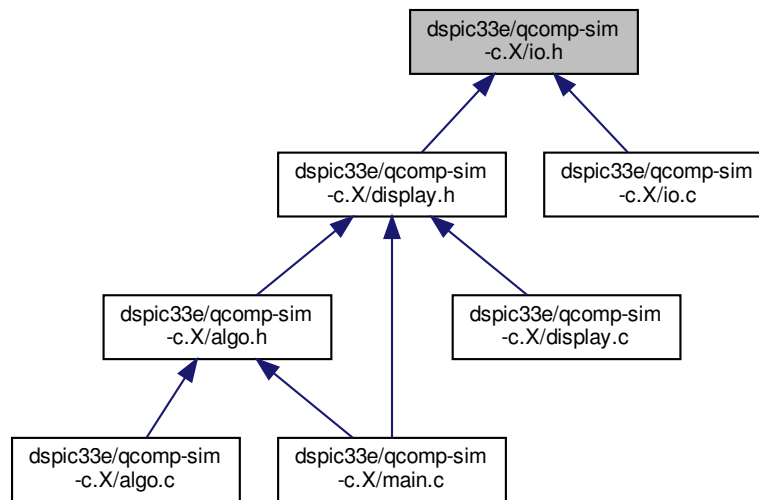

Data Structures

- struct [BTN](#)
pin mappings
- struct [LED_GLOBAL](#)
Global [LED](#) strobing state parameter.
- struct [LED](#)
Each [LED](#) has the following type.
- struct [RGB](#)
A type for holding red, green, blue values.
- struct [cycle_node](#)
The basis for a linked list of states to cycle.

Macros

- `#define red 0`
Locations of LEDs and buttons on Port D.
- `#define amber 1`
- `#define green 2`
- `#define sw1 6`
- `#define sw2 7`
- `#define sw3 13`
- `#define off 0`
- `#define on 1`
- `#define LE 3`
Control for TLC591x chip on Port D.
- `#define OE 4`
- `#define SH 5`
Control lines for SNx4HC165 chip.
- `#define CLK_INH 8`

Typedefs

- typedef struct [cycle_node](#) [cycle_node_t](#)
The basis for a linked list of states to cycle.

Functions

- int [setup_io](#) (void)
Set up LEDs and buttons on port D.
- void [setup_external_buttons](#) (void)
All the setup for external buttons.
- int [read_qubit_btn](#) (int btn)
Read the state of a qubit button.
- int [read_func_btn](#) (int btn)
Read the state of a qubit button.
- void [setup_external_leds](#) (void)
Set external variable [RGB](#) LEDs.
- int [set_led](#) (int color, int state)
Turn a particular [LED](#) on or off.
- int [read_btn](#) (int btn)
Read the state of a push button.
- void [leds_off](#) (void)
Turn all the LEDs off.
- void [flash_led](#) (int color, int number)
Flash one [LED](#) a number of times.
- void [flash_all](#) (int number)
Flash all the LEDs a number of times.
- void [set_strobe](#) (int color, int state)
Set an [LED](#) strobing.
- void [toggle_strobe](#) (int color)
Toggle [LED](#) strobe.
- int [update_display_buffer](#) (int led_index, bool R, bool G, bool B)
- int [write_display_driver](#) (void)
Send a byte to the display driver.
- int [set_external_led](#) (int led_index, unsigned _Fract R, unsigned _Fract G, unsigned _Fract B)
Updates color properties of global led array.
- int [led_color_int](#) (int device, int R, int G, int B)
Takes led number & [RGB](#) -> returns integer for sending via SPI to set the [LED](#).
- int [led_cycle_test](#) (void)
Loop to cycle through LEDs 0 - 15.
- int [read_external_buttons](#) (void)
Update the buttons array (see declaration above)
- int [add_to_cycle](#) ([RGB](#) colors[], int size)
Add an element to the states to be cycled.
- int [reset_cycle](#) (void)
Reset the display cycle. Called before adding anything.

6.9.1 Detailed Description

Description: Header file for input output functions.

Include it at the top of any C source file which uses buttons and LEDs. It also defines various constants representing the positions of the buttons and LEDs on port D.

Authors

J Scott, O Thomas

Date

Nov 2018

6.9.2 Function Documentation

6.9.2.1 add_to_cycle()

```
int add_to_cycle (
    RGB colors[],
    int size )
```

Add an element to the states to be cycled.

Add an element to the states to be cycled.

Parameters

<i>leds</i>	An array of LED indices
<i>colors</i>	Corresponding RGB values for each LED
<i>size</i>	The size of both the above arrays

This function is used to add a set of LED states (RGB values) into the list of states being cycled.

Repeatedly calling this function adds a new state to the end of the list of displayed states. LED states are shown in the order this function is called.

The implementation uses the linked list type `cycle_node`. Each call of this function adds a new element to the end of cycle node Add the new colors to top of array

6.9.2.2 flash_all()

```
void flash_all (
    int number )
```

Flash all the LEDs a number of times.

Parameters

<i>number</i>	
---------------	--

6.9.2.3 flash_led()

```
void flash_led (
    int color,
    int number )
```

Flash one LED a number of times.

Parameters

<i>color</i>	
<i>number</i>	

Flash one LED a number of times.

6.9.2.4 led_color_int()

```
int led_color_int (
    int device,
    int R,
    int G,
    int B )
```

Takes led number & RGB -> returns integer for sending via SPI to set the LED.

Parameters

<i>device</i>	input LED number to change
<i>R</i>	red value between 0 & 1
<i>G</i>	green value between 0 & 1
<i>B</i>	blue value between 0 & 1

Returns

Returns int to be sent to LED Driver

convention RGB -> 000

Each LED takes 3 lines, assumes there are no gaps between LED channels "device" goes between 0 to $2^n - 1$

6.9.2.5 led_cycle_test()

```
int led_cycle_test (
    void )
```

Loop to cycle through LEDs 0 - 15.

Todo This won't work now: write_display_driver(counter);

6.9.2.6 read_btn()

```
int read_btn (
    int btn )
```

Read the state of a push button.

Parameters

<i>btn</i>	
------------	--

Note

How well do you know C

6.9.2.7 read_external_buttons()

```
int read_external_buttons (
    void )
```

Update the buttons array (see declaration above)

Update the buttons array (see declaration above)

The external buttons are interfaced to the microcontroller via a shift register. Data is shifted in a byte at a time using the SPI 3 module. The sequence to read the buttons is as follows:

1) Momentarily bring SH low to latch button data into the shift registers 2) Bring CLK_INH low to enable the clock input on the shift register 3) Start the SPI 3 clock and read data in via the SDI 3 line

The control lines SH and CLK_INH are on port D

Todo read buttons

SH pin

Todo How long should this be?

Todo button remappings...

6.9.2.8 read_func_btn()

```
int read_func_btn (
    int btn )
```

Read the state of a qubit button.

Parameters

<i>btn</i>	The index of the button to read
------------	---------------------------------

Returns

the state of the button – 1 if pressed, 0 if not

The button state is in the buttons array Each element of that array is a byte Get the relevant byte

Retrieve the value of the right bit

Return the button state

6.9.2.9 read_qubit_btn()

```
int read_qubit_btn (
    int btn )
```

Read the state of a qubit button.

Parameters

<i>btn</i>	The index of the button to read
------------	---------------------------------

Returns

the state of the button – 1 if pressed, 0 if not

Parameters

<i>btn</i>	The index of the button to read
------------	---------------------------------

Returns

the state of the button – 1 if pressed, 0 if not

Todo should return a qubit number which has been selected

The button state is in the buttons array Each element of that array is a byte Get the relevant byte

Retrieve the value of the right bit

Return the button state

6.9.2.10 `reset_cycle()`

```
int reset_cycle (
    void )
```

Reset the display cycle. Called before adding anything.

Reset the display cycle. Called before adding anything.

Todo do it

6.9.2.11 `set_external_led()`

```
int set_external_led (
    int index,
    unsigned _Fract R,
    unsigned _Fract G,
    unsigned _Fract B )
```

Updates color properties of global led array.

Parameters

<i>led_index</i>	
<i>R</i>	red value between 0 & 1
<i>G</i>	green value between 0 & 1
<i>B</i>	blue value between 0 & 1

Returns

0 if successful, -1 otherwise

Use the function to set the **RGB** level of an **LED**. The **LED** is chosen using the

Parameters

<i>led_index.</i>	The
<i>R</i>	

6.9.2.12 `set_led()`

```
int set_led (
    int color,
    int state )
```

Turn a particular **LED** on or off.

Parameters

<i>color</i>	
<i>state</i>	

6.9.2.13 set_strobe()

```
void set_strobe (
    int color,
    int state )
```

Set an [LED](#) strobing.

Parameters

<i>color</i>	
<i>state</i>	

6.9.2.14 setup_external_buttons()

```
void setup_external_buttons (
    void )
```

All the setup for external buttons.

All the setup for external buttons.

All the setup for external buttons For the qubits

logical 0

logical 1

logical 2

logical 3

For the function buttons

logical 4

logical 5

logical 6

logical 7

logical 8

6.9.2.15 setup_external_leds()

```
void setup_external_leds (
    void )
```

Set external variable **RGB** LEDs.

Initialise **LED** lines

Initialise parameters to zero

Initialise display buffer to zero

Set flashing period

Turn timer 6 on

Todo CURRENTLY CYCLING IS OFF

6.9.2.16 setup_io()

```
int setup_io (
    void )
```

Set up LEDs and buttons on port D.

< Set port c digital for spi3

Set the OE pin high

Set OE(ED2) pin

Set the SH pin high

Set SH pin

set CLK_INH high while buttons are pressed

6.9.2.17 toggle_strobe()

```
void toggle_strobe (
    int color )
```

Toggle **LED** strobe.

Parameters

<i>color</i>	
--------------	--

6.9.2.18 update_display_buffer()

```
int update_display_buffer (
    int n,
    bool R,
    bool G,
    bool B )
```

Parameters

<i>led_index</i>	LED number to modify
<i>R</i>	Intended value of the R led
<i>G</i>	Intended value of the G led
<i>B</i>	Intended value of the B led

Returns

0 if successful

Parameters

<i>index</i>	LED number to modify
<i>R</i>	Intended value of the R led
<i>G</i>	Intended value of the G led
<i>B</i>	Intended value of the B led

Returns

0 if successful

Could this get any worse!

This function is supposed to make the display writing process more efficient. It updates a global display buffer which is written periodically to the led display drivers. Instead of the display driver function re-reading the desired state of all the LED lines every time it is called, this function can be used to update only the lines that have changed.

There are quite a few potential bugs in here, mainly array out of bounds if the DISPLAY_CHIP_NUM is not set correctly or the LED RGB lines are wrong. (Or if there are just bugs.) Set or clear the red LED of the nth LED

Set or clear the red LED of the nth LED

Set or clear the red LED of the nth LED

6.9.2.19 write_display_driver()

```
int write_display_driver (
    void )
```

Send a byte to the display driver.

Don't use this function to write to LEDs – use the `set_external_led` function

Send a byte to the display driver.

On power on, the chip (TLC591x) is in normal mode which means that the clocked bytes sent to the chip set which LEDs are on and which are off (as opposed to setting the current of the LEDs)

To write to the device, use the SPI module to write a byte to the SDI 1 pin on the chip. Then momentarily set the [LE\(ED1\)](#) pin to latch the data onto the output register. Finally, bring the OE(ED2) pin low to enable the current sinking to turn on the LEDs. See the timing diagram on page 17 of the datasheet for details.

[LE\(ED1\)](#) and OE(ED2) will be on Port D Set [LE\(ED1\)](#) pin


Todo How long should this be?

6.10 dspic33e/qcomp-sim-c.X/main.c File Reference

The main function.

```
#include "config.h"
#include "time.h"
#include "algo.h"
#include "display.h"
```

Include dependency graph for main.c:

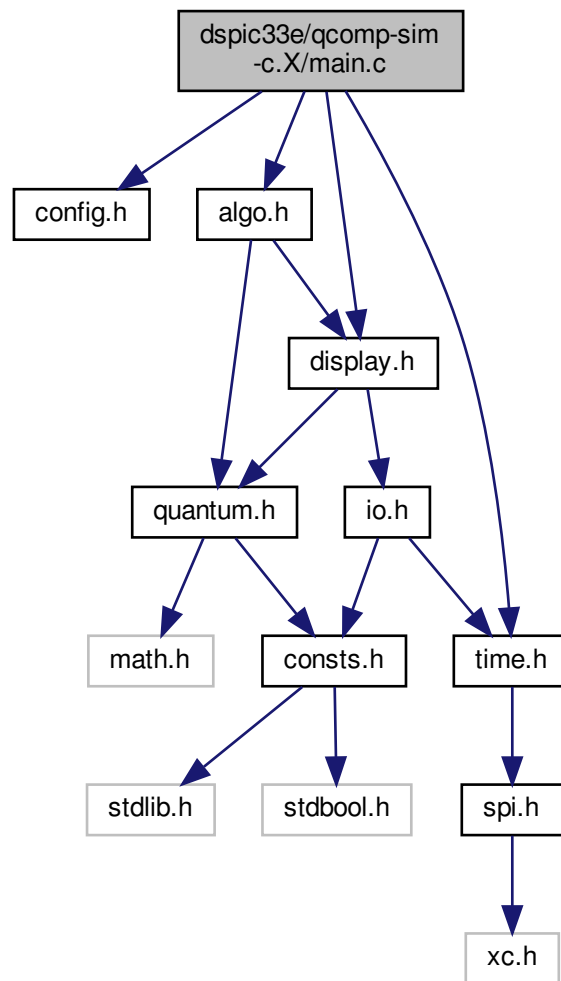

Functions

- int `main` (void)

6.10.1 Detailed Description

The main function.

Authors

J Scott, O Thomas

Date

Nov 2018

Contains an example of fixed precision 2x2 matrix multiplication for applying operations to a single qubit. The only operations included are H, X and Z so that everything is real (this can be extended later).

All the functions have now been moved into separate files. [io.h](#) and [io.c](#) contain functions for reading and controlling the buttons and LEDs, and [quantum.h/quantum.c](#) contain the matrix arithmetic for simulating one qubit.

Compile command: make (on linux). But if you want to program the micro- controller too or if you're using windows you're better of downloading and installing MPLAB-X <https://www.microchip.com/mplab/mplab-x-ide>.

Note

You also need the microchip xc16 compilers which are available from <https://www.microchip.com/mplab/compilers>

6.10.2 Function Documentation**6.10.2.1 main()**

```
int main (
    void )
```

Test single qubit gates

Todo fix this menu system

Todo add a button for switching between display average and cycle modes

In this test the qubit buttons (0 - 3) will be used to select a qubit and the function buttons (4 - 6) will be used to perform an operation on the selected qubit (X, Z or H).

The loop is made of two parts. The first waits for a qubit to be selected and the second chooses a single qubit operation for that qubit. Once the gate has been pressed the operation is immediately executed and the loop repeats.

<

Parameters

<i>qubit</i>	integer to act on
--------------	-------------------

<

Parameters

<i>target</i>	qubit integer for 2-qubit gates
---------------	---------------------------------

<

Parameters

<i>integer</i>	used in switch to pick which gate to do
----------------	---

after reading buttons see if any qubit is selected write the qubit number to "select_qubit"

Wait for a qubit operation to be selected

if the '0' button is ever pressed reset to the vacuum state.

Note

Nothing wrong here...

End of operation select Perform the qubit gates

<

Note


Really important!

6.11 dspic33e/qcomp-sim-c.X/quantum.c File Reference

Description: Contains matrix and vector arithmetic for simulating one qubit.

```
#include "quantum.h"
```

Include dependency graph for quantum.c:

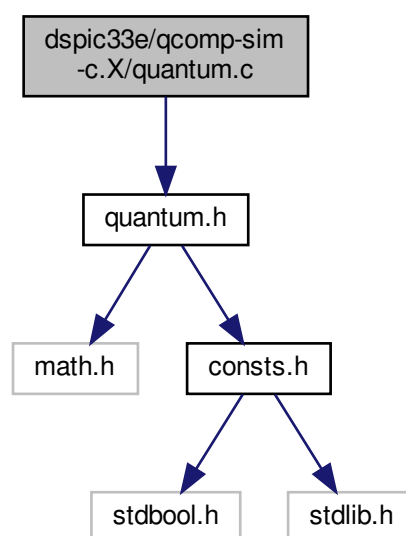

Functions

- int `pow2` (int k)
A simple function to compute integer powers of 2.
- int `sign` (Complex a)
returns phase quadrant
- void `cadd` (const Complex a, const Complex b, Complex result)
- void `cmul` (const Complex a, const Complex b, Complex result)
- `Q15 absolute` (Complex x)
abs function
- `Q15 square_magnitude` (Complex x)
Compute the magnitude squared of a complex number.
- void `zero_state` (Complex state[])
Initialise state to the vacuum (zero apart from the first position) Specify the dimension – of the matrix, i.e.
- void `mat_mul_old` (const Complex M[2][2], Complex V[], int i, int j)
This is an old version of the mat_mul function.
- void `mat_mul` (const Complex M[2][2], Complex V[], int i, int j)
This version uses inlined cadd and cmul.
- void `single_qubit_op` (const Complex op[2][2], int k, Complex state[])
apply operator
- void `single_qubit_op_new` (const Complex op[2][2], int k, Complex state[])
New function to perform single qubit gates.
- void `controlled_qubit_op_new` (const Complex op[2][2], int ctrl, int targ, Complex state[])
Efficient controlled qubit operation.
- void `controlled_qubit_op` (const Complex op[2][2], int ctrl, int targ, Complex state[])
Old controlled qubit operations.

6.11.1 Detailed Description

Description: Contains matrix and vector arithmetic for simulating one qubit.

Authors

J Scott, O Thomas

Date

Nov 2018

Todo split into a complex math and operator files

6.11.2 Function Documentation

6.11.2.1 absolute()

```
Q15 absolute (
    Complex x )
```

abs function

Parameters

<code>x</code>	A complex number to find the absolute value of
----------------	--

Returns

The absolute value

Todo Check that the complex part is small

6.11.2.2 controlled_qubit_op()

```
void controlled_qubit_op (
    const Complex op[2][2],
    int ctrl,
    int targ,
    Complex state[] )
```

Old controlled qubit operations.

apply controlled 2x2 op ROOT loop: starts at 0, increases in steps of 1

STEP loop: starts at 0, increases in steps of $2^{(k+1)}$

First index is ZERO, second index is ONE

Note

for 2 qubit case check if the index in the ctrl qubit is a 1 then apply the 2x2 unitary else do nothing
sorry. this checks for the first element of the state vector i.e. the target qubits $|0\rangle$ and checks that the state vector element is one which the control qubit has a $|1\rangle$ state -> (root + step)

The second element of the state vector to take is then the first $+2^{(targ \text{ qubit number})}$. This also needs to be checked that the control qubit is in the $|1\rangle$.

Todo This expression can probably be simplified or broken over lines. The condition for the if statement is that root+step and root + step + root_max contain 1 in the ctrl-th bit.

6.11.2.3 controlled_qubit_op_new()

```
void controlled_qubit_op_new (
    const Complex op[2][2],
    int ctrl,
    int targ,
    Complex state[] )
```

Efficient controlled qubit operation.

Parameters

<i>op</i>	the operation (ctrl-op is performed)
<i>ctrl</i>	the index of the ctrl qubit
<i>targ</i>	the index of the targ qubit
<i>state</i>	the state vector

This function is implemented similarly to the single qubit case above. Now there are three ranges of indices to increment through, separated by the two qubit indices.

6.11.2.4 mat_mul()

```
void mat_mul (
    const Complex M[2][2],
    Complex V[],
    int i,
    int j )
```

This version uses inlined cadd and cmul.

2x2 complex matrix multiplication

Parameters

<i>M</i>	A 2x2 complex matrix
<i>V</i>	A Nx1 complex vector
<i>i</i>	The first index to pick from the vector V
<i>j</i>	The second index to pick from the vector V

Todo Is static enough? Or should we declare outside the function?

Todo Should we use for loops? Or is it better not to..?

This is necessary because the previous computations use V

6.11.2.5 mat_mul_old()

```
void mat_mul_old (
    const Complex M[2][2],
    Complex V[],
    int i,
    int j )
```

This is an old version of the mat_mul function.

Parameters

<i>M</i>	A 2x2 complex matrix
<i>V</i>	A Nx1 complex vector
<i>i</i>	The first index to pick from the vector V
<i>j</i>	The second index to pick from the vector V

The function uses `cadd` and `cmul`

Todo Should these be outside the function?

6.11.2.6 `pow2()`

```
int pow2 (
    int k )
```

A simple function to compute integer powers of 2.

Parameters

<i>k</i>	The exponent of 2 to compute
----------	------------------------------

Returns

2^k

6.11.2.7 `sign()`

```
int sign (
    Complex a )
```

returns phase quadrant

```
///          Im
//          |
//      1   |   0
//          |
//  ----- Re
//          |
//      2   |   3
//          |
///
```

6.11.2.8 `single_qubit_op()`

```
void single_qubit_op (
    const Complex op[2][2],
    int k,
    Complex state[ ] )
```

apply operator

Parameters

<i>state</i>	state vector containing amplitudes
<i>qubit</i>	qubit number to apply 2x2 matrix to
<i>N</i>	total number of qubits in the state
<i>op</i>	2x2 operator to be applied

This routine applies a single qubit gate to the state vector

Parameters

<i>state.</i>	Consider the three qubit case, with amplitudes shown in the table below:
---------------	--

*	index	binary	amplitude
*	0	0 0 0	a0
*	1	0 0 1	a1
*	2	0 1 0	a2
*	3	0 1 1	a3
*	4	1 0 0	a4
*	5	1 0 1	a5
*	6	1 1 0	a6
*	7	1 1 1	a7
*	-----		
*	Qubit:	2 1 0	
*			

If a single qubit operation is applied to qubit 2, then the 2x2 matrix must be applied to all pairs of (0,1) in the first column, with the numbers in the other columns fixed. In other words, the following indices are paired:

```
(0+0) (1+0) (2+0) (3+0)
(4+0) (5+0) (6+0) (7+0)
```

where the top line corresponds to the ZERO amplitude and the bottom row corresponds to the ONE amplitude.

Similarly, for qubit 1 the pairings are:

```
(0+0) (0+4) (1+0) (1+4)
(2+0) (2+4) (3+0) (3+4)
```

And for qubit 0 the pairings are:

```
(0+0) (0+2) (0+4) (0+6)
(1+0) (1+2) (1+4) (1+6)
```

These numbers are exactly the same as the previous function, which means the same nested loops can be used to perform operation. Now the index

```
root + step
```

refers to the ZERO amplitude (the first element in the column vector to be multiplied by the 2x2 matrix), and the index `Complex state[], int N root + 2k + step`

corresponds to the ONE entry. ROOT loop: starts at 0, increases in steps of 1

STEP loop: starts at 0, increases in steps of 2^(k+1)

First index is ZERO, second index is ONE

Todo Should we inline `mat_mul` here?

6.11.2.9 single_qubit_op_new()

```
void single_qubit_op_new (
    const Complex op[2][2],
    int k,
    Complex state[] )
```

New function to perform single qubit gates.

Parameters

<i>op</i>	the unitary to perform
<i>k</i>	the index of the qubit to modify
<i>state</i>	the state vector

The function computes a single qubit operation acting on

Parameters

<i>state.</i>	It sets the bit position associated with the qubit to zero, and then generates all possible indices in the other bit positions. These correspond to the ZERO states. The ONE states are obtained by changing the kth bit from zero to one.
---------------	--

6.11.2.10 square_magnitude()

```
Q15 square_magnitude (
    Complex x )
```

Compute the magnitude squared of a complex number.

Parameters

<i>x</i>	The input complex number x
----------	----------------------------

Returns

The value of $|x|^2$

Todo Maybe we should inline this

6.11.2.11 zero_state()

```
void zero_state (
    Complex state[] )
```

Initialise state to the vacuum (zero apart from the first position) Specify the dimension – of the matrix, i.e.

$2^{\text{(number of qubits)}}$


Note

oh the clarity!


6.12 dspic33e/qcomp-sim-c.X/quantum.h File Reference

Description: Header file containing all the matrix arithmetic for simulating a single qubit.

```
#include <math.h>
#include "consts.h"
Include dependency graph for quantum.h:
```

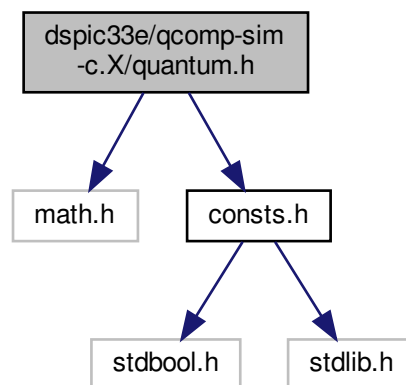

This graph shows which files directly or indirectly include this file:

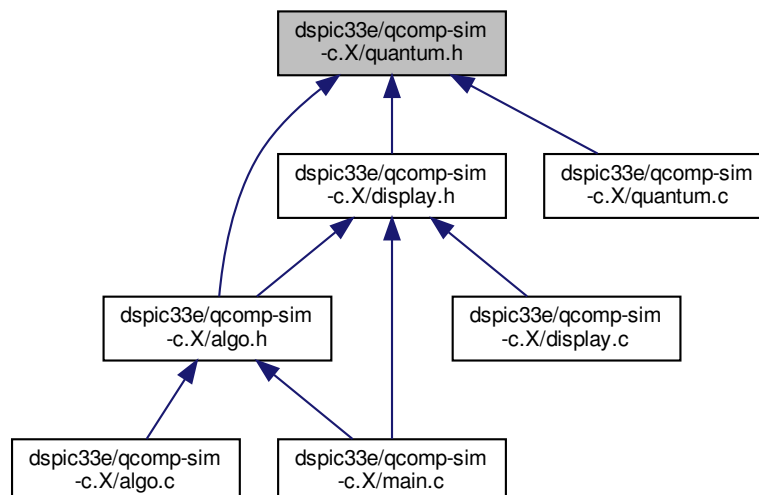

Enumerations

- enum `State` {
ZERO, ONE, PLUS, MINUS,
iPLUS, iMINUS }

Basis states.

Functions

- void `zero_state` (`Complex` state[])
Initialise state to the vacuum (zero apart from the first position) Specify the dimension – of the matrix, i.e.
- int `sign` (`Complex` a)
returns phase quadrant
- void `mat_mul` (const `Complex` M[2][2], `Complex` V[], int i, int j)
2x2 complex matrix multiplication
- void `single_qubit_op` (const `Complex` op[2][2], int qubit, `Complex` state[])
apply operator
- void `controlled_qubit_op` (const `Complex` op[2][2], int ctrl, int targ, `Complex` state[])
apply controlled 2x2 op
- `Q15 absolute` (`Complex` x)
abs function
- int `pow2` (int k)
A simple function to compute integer powers of 2.
- `Q15 square_magnitude` (`Complex` x)
Compute the magnitude squared of a complex number.

6.12.1 Detailed Description

Description: Header file containing all the matrix arithmetic for simulating a single qubit.

Authors

J Scott, O Thomas

Date

Nov 2018

6.12.2 Function Documentation

6.12.2.1 `absolute()`

```
Q15 absolute (
    Complex x )
```

abs function

Parameters

<i>x</i>	A complex number to find the absolute value of
----------	--

Returns

The absolute value

Todo Check that the complex part is small

6.12.2.2 controlled_qubit_op()

```
void controlled_qubit_op (
    const Complex op[2][2],
    int ctrl,
    int targ,
    Complex state[] )
```

apply controlled 2x2 op

Parameters

<i>op</i>	single qubit unitary 2x2
<i>ctrl</i>	control qubit number (0,1,...,n-1)
<i>targ</i>	target qubit number (0,1,...,n-1)
<i>state</i>	complex state vector

apply controlled 2x2 op ROOT loop: starts at 0, increases in steps of 1

STEP loop: starts at 0, increases in steps of $2^{(k+1)}$

First index is ZERO, second index is ONE

Note

for 2 qubit case check if the index in the ctrl qubit is a 1 then apply the 2x2 unitary else do nothing
sorry. this checks for the first element of the state vector i.e. the target qubits $|0\rangle$ and checks that the state vector element is one which the control qubit has a $|1\rangle$ state -> (root + step)

The second element of the state vector to take is then the first $+2^{(target\ qubit\ number)}$. This also needs to be checked that the control qubit is in the $|1\rangle$.

Todo This expression can probably be simplified or broken over lines. The condition for the if statement is that root+step and root + step + root_max contain 1 in the ctrl-th bit.

6.12.2.3 mat_mul()

```
void mat_mul (
    const Complex M[2][2],
    Complex V[],
    int i,
    int j )
```

2x2 complex matrix multiplication

Parameters

<i>M</i>	complex matrix
<i>V</i>	complex vector
<i>i</i>	integer first element of state vector
<i>j</i>	integer second element of state vector

Todo Because of the way the array types work (you can't pass a multidimensional array of unknown size) we will also need a function for 4x4 matrix multiplication.

2x2 complex matrix multiplication

Parameters

<i>M</i>	A 2x2 complex matrix
<i>V</i>	A Nx1 complex vector
<i>i</i>	The first index to pick from the vector V
<i>j</i>	The second index to pick from the vector V

Todo Is static enough? Or should we declare outside the function?

Todo Should we use for loops? Or is it better not to..?

This is necessary because the previous computations use V

6.12.2.4 pow2()

```
int pow2 (
    int k )
```

A simple function to compute integer powers of 2.

Parameters

<i>k</i>	The exponent of 2 to compute
----------	------------------------------

Returns 2^k **6.12.2.5 sign()**

```
int sign (
    Complex a )
```

returns phase quadrant

```
///          Im
//          |
//      1   |   0
//          |
//  ----- Re
//          |
//      2   |   3
//          |
///
```

6.12.2.6 single_qubit_op()

```
void single_qubit_op (
    const Complex op[2][2],
    int k,
    Complex state[] )
```

apply operator

Parameters

<i>state</i>	state vector containing amplitudes
<i>qubit</i>	qubit number to apply 2x2 matrix to
<i>op</i>	2x2 operator to be applied
<i>state</i>	state vector containing amplitudes
<i>qubit</i>	qubit number to apply 2x2 matrix to
<i>N</i>	total number of qubits in the state
<i>op</i>	2x2 operator to be applied

This routine applies a single qubit gate to the state vector

Parameters

<i>state.</i>	Consider the three qubit case, with amplitudes shown in the table below:
---------------	--

*	index	binary	amplitude
*	-----		
*	0	0 0 0	a0
*	1	0 0 1	a1
*	2	0 1 0	a2
*	3	0 1 1	a3
*	4	1 0 0	a4
*	5	1 0 1	a5
*	6	1 1 0	a6
*	7	1 1 1	a7
*	-----		
*	Qubit:	2 1 0	
*			

If a single qubit operation is applied to qubit 2, then the 2x2 matrix must be applied to all pairs of (0,1) in the first column, with the numbers in the other columns fixed. In other words, the following indices are paired:

```
(0+0) (1+0) (2+0) (3+0)
(4+0) (5+0) (6+0) (7+0)
```

where the top line corresponds to the ZERO amplitude and the bottom row corresponds to the ONE amplitude.

Similarly, for qubit 1 the pairings are:

```
(0+0) (0+4) (1+0) (1+4)
(2+0) (2+4) (3+0) (3+4)
```

And for qubit 0 the pairings are:

```
(0+0) (0+2) (0+4) (0+6)
(1+0) (1+2) (1+4) (1+6)
```

These numbers are exactly the same as the previous function, which means the same nested loops can be used to perform operation. Now the index

```
root + step
```

refers to the ZERO amplitude (the first element in the column vector to be multiplied by the 2x2 matrix), and the index `Complex state[], int N root + 2^k + step`

corresponds to the ONE entry. ROOT loop: starts at 0, increases in steps of 1

STEP loop: starts at 0, increases in steps of $2^{(k+1)}$

First index is ZERO, second index is ONE

Todo Should we inline `mat_mul` here?

6.12.2.7 square_magnitude()

```
Q15 square_magnitude (
    Complex x )
```

Compute the magnitude squared of a complex number.

Parameters

<i>x</i>	The input complex number <i>x</i>
----------	-----------------------------------

Returns

The value of $|x|^2$

Todo Maybe we should inline this

Parameters

<i>x</i>	The input complex number <i>x</i>
----------	-----------------------------------

Returns

The value of $|x|^2$

Todo Maybe we should inline this

6.12.2.8 zero_state()

```
void zero_state (
    Complex state[] )
```

Initialise state to the vacuum (zero apart from the first position) Specify the dimension – of the matrix, i.e.

$2^{\text{(number of qubits)}}$

Parameters

<i>state</i>	complex state vector
--------------	----------------------

$2^{\text{(number of qubits)}}$

Note


oh the clarity!

6.13 dspic33e/qcomp-sim-c.X/spi.c File Reference

Description: Functions for communicating with serial devices.

```
#include "spi.h"
```

Include dependency graph for spi.c:

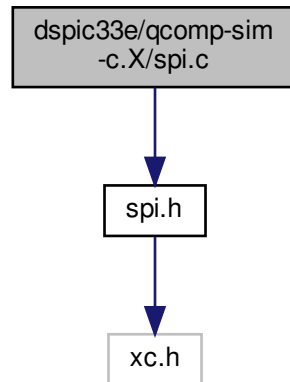

Functions

- int [setup_spi](#) (void)
Set up serial peripheral interface.
- int [send_byte_spi_1](#) (int data)
Send a byte to the SPI1 peripheral.
- int [read_byte_spi_3](#) ()
Recieve a byte from the SPI3 peripheral.

6.13.1 Detailed Description

Description: Functions for communicating with serial devices.

Authors

J Scott, O Thomas

Date

Nov 2018

6.13.2 Function Documentation

6.13.2.1 [send_byte_spi_1](#)()

```
int send_byte_spi_1 (  
    int data )
```

Send a byte to the SPI1 peripheral.

Parameters

<i>data</i>	byte to be sent to SPI1
-------------	-------------------------

6.13.2.2 setup_spi()

```
int setup_spi (
    void )
```

Set up serial peripheral interface.

Pin mappings — Pin mappings and codes —

J10:41 = J1:91 = uC:70 = RPI74 (PPS code: 0100 1010)
 J10:44 = J1:93 = uC:9 = RPI52 (PPS code: 0011 0100)
 J10:47 = J1:101 = uC:34 = RPI42 (PPS code: 0010 1010)
 J10:43 = J1:95 = uC:72 = RP64 (PPS reg: RPOR0_L; code: 0100 0000)
 J10:46 = J1:97 = uC:69 = RPI73 (PPS code: 0100 1001)
 J10:7 = J1:13 = uC:3 = RP85 (PPS reg: RPOR6_L; code: 0101 0101)
 J10:5 = J1:7 = uC:5 = RP87 (PPS reg: RPOR6_H)
 J10:55 = J1:117 = uC:10 = RP118 (PPS reg: RPOR13_H)

— Pin mappings for SPI 1 module —

SPI 1 Clock Out (SCK1) PPS code: 000110 (0x06)
 SPI 1 Data Out (SDO1) PPS code: 000101 (0x05)
 SPI 1 Slave Select PPS code: 000111

— Pin mappings for SPI 3 module —

SPI 3 Clock Out (SCK3) PPS code: 100000 (0x20)
 SPI 3 Data Out (SDO3) PPS code: 011111 (0x1F)
 SPI 3 Slave Select PPS code: 100001

Configure the SPI 1 pins

< Put SCK1 on J10:43

< Put SDO1 on J10:55

The clock pin also needs to be configured as an input

< Set SCK1 on J10:43 as input

Configure the SPI 3 output pins

< Put SCK3 on J10:7

< Put SDO3 on J10:5

< Put SDI3 on J10:44

< Set SCK3 on J10:7 as input

@note

SPI 1 clock configuration

$SCK1 = F_{CY} / (\text{Primary Prescaler} * \text{Secondary Prescaler})$


Assuming that $F_{CY} = 50\text{MHz}$, and the prescalers are 4 and 1, the SPI clock frequency will be 12.5MHz.

6.14 dspic33e/qcomp-sim-c.X/spi.h File Reference


Description: SPI communication functions.

```
#include "xc.h"
```

Include dependency graph for spi.h:



This graph shows which files directly or indirectly include this file:

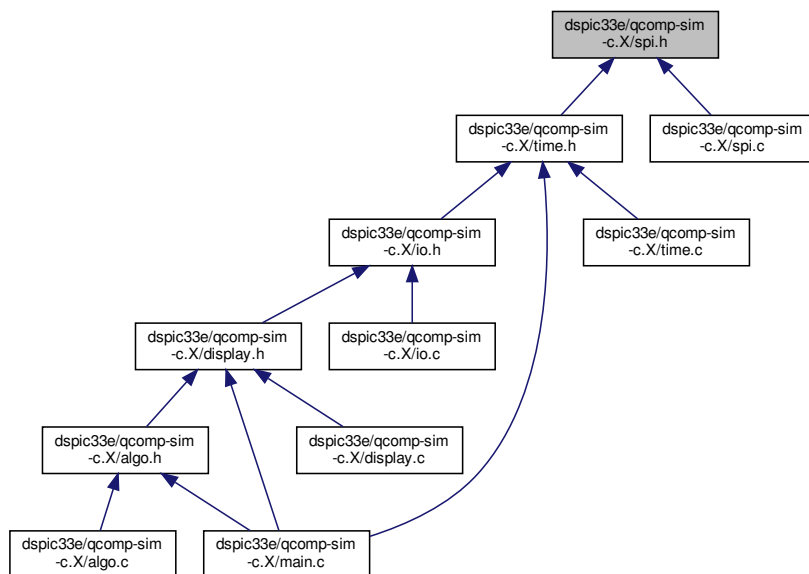

Functions

- int [setup_spi](#) (void)
Set up serial peripheral interface.
- int [send_byte_spi_1](#) (int data)
Send a byte to the SPI1 peripheral.
- int [read_byte_spi_3](#) ()
Recieve a byte from the SPI3 peripheral.

6.14.1 Detailed Description

Description: SPI communication functions.

Authors

J Scott, O Thomas

Date

Nov 2018

6.14.2 Function Documentation

6.14.2.1 send_byte_spi_1()

```
int send_byte_spi_1 (
    int data )
```

Send a byte to the SPI1 peripheral.

Parameters

<i>data</i>	byte to be sent to SPI1
-------------	-------------------------

6.14.2.2 setup_spi()

```
int setup_spi (
    void )
```

Set up serial peripheral interface.

Pin mappings — Pin mappings and codes —

J10:41 = J1:91 = uC:70 = RPI74 (PPS code: 0100 1010)
 J10:44 = J1:93 = uC:9 = RPI52 (PPS code: 0011 0100)
 J10:47 = J1:101 = uC:34 = RPI42 (PPS code: 0010 1010)
 J10:43 = J1:95 = uC:72 = RP64 (PPS reg: RPOR0_L; code: 0100 0000)
 J10:46 = J1:97 = uC:69 = RPI73 (PPS code: 0100 1001)
 J10:7 = J1:13 = uC:3 = RP85 (PPS reg: RPOR6_L; code: 0101 0101)
 J10:5 = J1:7 = uC:5 = RP87 (PPS reg: RPOR6_H)
 J10:55 = J1:117 = uC:10 = RP118 (PPS reg: RPOR13_H)

— Pin mappings for SPI 1 module —

SPI 1 Clock Out (SCK1) PPS code: 000110 (0x06)

SPI 1 Data Out (SDO1) PPS code: 000101 (0x05)
SPI 1 Slave Select PPS code: 000111

— Pin mappings for SPI 3 module —

SPI 3 Clock Out (SCK3) PPS code: 100000 (0x20)
SPI 3 Data Out (SDO3) PPS code: 011111 (0x1F)
SPI 3 Slave Select PPS code: 100001

Configure the SPI 1 pins

< Put SCK1 on J10:43

< Put SDO1 on J10:55

The clock pin also needs to be configured as an input

< Set SCK1 on J10:43 as input

Configure the SPI 3 output pins

< Put SCK3 on J10:7

< Put SDO3 on J10:5

< Put SDI3 on J10:44

< Set SCK3 on J10:7 as input

@note

SPI 1 clock configuration

$$SCK1 = F_{CY} / (\text{Primary Prescaler} * \text{Secondary Prescaler})$$


Assuming that $F_{CY} = 50\text{MHz}$, and the prescalers are 4 and 1, the SPI clock frequency will be 12.5MHz.

6.15 dspic33e/qcomp-sim-c.X/time.c File Reference

Description: Functions to control the on chip timers.

```
#include "time.h"
```

Include dependency graph for time.c:

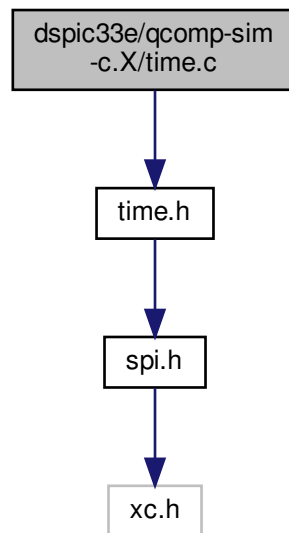

Functions

- void **setup_clock** ()
- void **setup_timer** ()
- void **reset_timer** ()
- void **start_timer** ()
- void **stop_timer** ()
- unsigned long int **read_timer** ()
- void **delay** ()

Delay function!

6.15.1 Detailed Description

Description: Functions to control the on chip timers.

Authors

J Scott, O Thomas

Date

Nov 2018

6.15.2 Function Documentation

6.15.2.1 `setup_timer()`

```
void setup_timer ( )
```


Todo distinguish between the two different timers here...

6.16 `dspic33e/qcomp-sim-c.X/time.h` File Reference


Description: Header file containing all the timing functions.

```
#include "spi.h"
```

Include dependency graph for `time.h`:

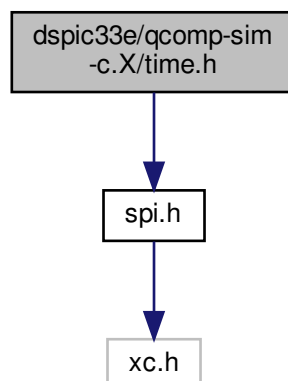

This graph shows which files directly or indirectly include this file:

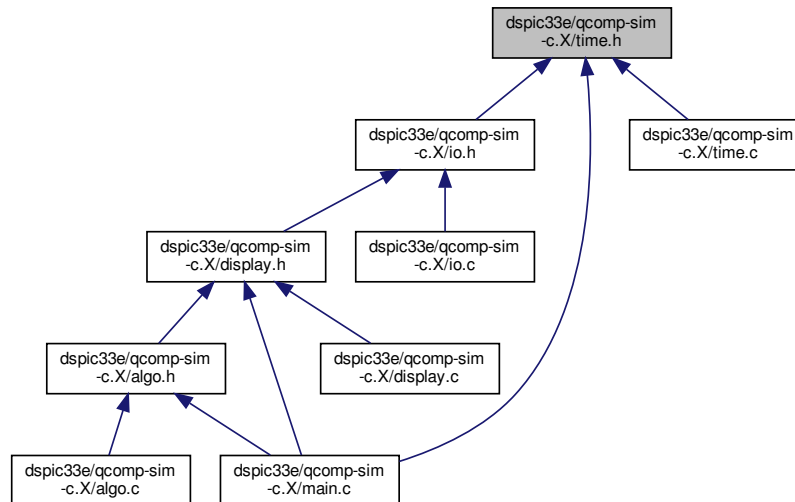

Functions

- void **setup_clock** ()
- void **setup_timer** ()
- void **reset_timer** ()
- void **start_timer** ()
- void **stop_timer** ()
- unsigned long int **read_timer** ()
- void **delay** ()

Delay function!

6.16.1 Detailed Description

Description: Header file containing all the timing functions.

Authors

J Scott, O Thomas

Date

Nov 2018

6.16.2 Function Documentation

6.16.2.1 setup_timer()

```
void setup_timer ( )
```

Todo distinguish between the two different timers here...

Index

- `__attribute__`
 - io.c, [42](#)
- absolute
 - quantum.c, [67](#)
 - quantum.h, [74](#)
- add_to_cycle
 - io.c, [42](#)
 - io.h, [55](#)
- algo.c
 - check_op, [15](#)
 - check_qubit, [15](#)
 - gate, [16](#)
 - gate_display, [16](#)
 - op_routine, [16](#)
 - repetition_code, [16](#)
 - swap_test, [17](#)
 - toffoli_gate, [17](#)
 - two_gate, [18](#)
 - two_gate_display, [18](#)
- algo.h
 - check_op, [21](#)
 - check_qubit, [21](#)
 - gate, [21](#)
 - gate_display, [21](#)
 - op_routine, [22](#)
 - repetition_code, [22](#)
 - swap_test, [23](#)
 - toffoli_gate, [23](#)
 - two_gate, [24](#)
 - two_gate_display, [24](#)
- BTN, [9](#)
- btn_func
 - io.c, [51](#)
- btn_qubit
 - io.c, [51](#)
- buttons
 - io.c, [51](#)
- check_op
 - algo.c, [15](#)
 - algo.h, [21](#)
- check_qubit
 - algo.c, [15](#)
 - algo.h, [21](#)
- consts.c
 - H, [26](#)
 - rXT, [27](#)
 - rX, [27](#)
 - X, [27](#)
 - Y, [28](#)
 - Z, [28](#)
- consts.h
 - H, [30](#)
 - rXT, [31](#)
 - rX, [30](#)
 - X, [31](#)
 - Y, [31](#)
 - Z, [31](#)
- controlled_qubit_op
 - quantum.c, [68](#)
 - quantum.h, [75](#)
- controlled_qubit_op_new
 - quantum.c, [68](#)
- cycle_node, [10](#)
- display.c
 - display_average, [33](#)
 - display_cycle, [34](#)
 - NUM_MAX_AMPS, [33](#)
 - remove_zero_amp_states, [34](#)
 - sort_states, [35](#)
- display.h
 - display_average, [37](#)
 - display_cycle, [38](#)
 - remove_zero_amp_states, [39](#)
 - sort_states, [39](#)
- display_average
 - display.c, [33](#)
 - display.h, [37](#)
- display_cycle
 - display.c, [34](#)
 - display.h, [38](#)
- dspic33e/qcomp-sim-c.X/algo.c, [13](#)
- dspic33e/qcomp-sim-c.X/algo.h, [19](#)
- dspic33e/qcomp-sim-c.X/config.h, [25](#)
- dspic33e/qcomp-sim-c.X/consts.c, [25](#)
- dspic33e/qcomp-sim-c.X/consts.h, [28](#)
- dspic33e/qcomp-sim-c.X/display.c, [32](#)
- dspic33e/qcomp-sim-c.X/display.h, [36](#)
- dspic33e/qcomp-sim-c.X/io.c, [40](#)
- dspic33e/qcomp-sim-c.X/io.h, [52](#)
- dspic33e/qcomp-sim-c.X/main.c, [63](#)
- dspic33e/qcomp-sim-c.X/quantum.c, [66](#)
- dspic33e/qcomp-sim-c.X/quantum.h, [73](#)
- dspic33e/qcomp-sim-c.X/spi.c, [79](#)
- dspic33e/qcomp-sim-c.X/spi.h, [82](#)
- dspic33e/qcomp-sim-c.X/time.c, [85](#)
- dspic33e/qcomp-sim-c.X/time.h, [86](#)

- flash_all
 - io.c, [43](#)
 - io.h, [55](#)
- flash_led
 - io.c, [43](#)
 - io.h, [56](#)
- gate
 - algo.c, [16](#)
 - algo.h, [21](#)
- gate_display
 - algo.c, [16](#)
 - algo.h, [21](#)
- H
 - consts.c, [26](#)
 - consts.h, [30](#)
- io.c
 - __attribute__, [42](#)
 - add_to_cycle, [42](#)
 - btn_func, [51](#)
 - btn_qubit, [51](#)
 - buttons, [51](#)
 - flash_all, [43](#)
 - flash_led, [43](#)
 - isr_counter, [51](#)
 - led_color_int, [43](#)
 - led_cycle_test, [44](#)
 - led_global, [51](#)
 - read_btn, [44](#)
 - read_external_buttons, [45](#)
 - read_func_btn, [45](#)
 - read_qubit_btn, [46](#)
 - reset_cycle, [46](#)
 - set_external_led, [46](#)
 - set_led, [47](#)
 - set_strobe, [47](#)
 - setup_external_buttons, [48](#)
 - setup_external_leds, [48](#)
 - setup_io, [48](#)
 - TLC591x_mode_switch, [49](#)
 - toggle_strobe, [49](#)
 - update_display_buffer, [50](#)
 - write_display_driver, [50](#)
- io.h
 - add_to_cycle, [55](#)
 - flash_all, [55](#)
 - flash_led, [56](#)
 - led_color_int, [56](#)
 - led_cycle_test, [56](#)
 - read_btn, [57](#)
 - read_external_buttons, [57](#)
 - read_func_btn, [57](#)
 - read_qubit_btn, [58](#)
 - reset_cycle, [58](#)
 - set_external_led, [59](#)
 - set_led, [59](#)
 - set_strobe, [60](#)
 - setup_external_buttons, [60](#)
 - setup_external_leds, [60](#)
 - setup_io, [61](#)
 - toggle_strobe, [61](#)
 - update_display_buffer, [62](#)
 - write_display_driver, [62](#)
- isr_counter
 - io.c, [51](#)
- LED_GLOBAL, [11](#)
- LED, [10](#)
- led_color_int
 - io.c, [43](#)
 - io.h, [56](#)
- led_cycle_test
 - io.c, [44](#)
 - io.h, [56](#)
- led_global
 - io.c, [51](#)
- main
 - main.c, [65](#)
- main.c
 - main, [65](#)
- mat_mul
 - quantum.c, [69](#)
 - quantum.h, [75](#)
- mat_mul_old
 - quantum.c, [69](#)
- NUM_MAX_AMPS
 - display.c, [33](#)
- op_routine
 - algo.c, [16](#)
 - algo.h, [22](#)
- pow2
 - quantum.c, [70](#)
 - quantum.h, [76](#)
- quantum.c
 - absolute, [67](#)
 - controlled_qubit_op, [68](#)
 - controlled_qubit_op_new, [68](#)
 - mat_mul, [69](#)
 - mat_mul_old, [69](#)
 - pow2, [70](#)
 - sign, [70](#)
 - single_qubit_op, [70](#)
 - single_qubit_op_new, [71](#)
 - square_magnitude, [72](#)
 - zero_state, [72](#)
- quantum.h
 - absolute, [74](#)
 - controlled_qubit_op, [75](#)
 - mat_mul, [75](#)
 - pow2, [76](#)
 - sign, [77](#)
 - single_qubit_op, [77](#)

- square_magnitude, [78](#)
- zero_state, [79](#)
- RGB, [12](#)
- rXT
 - consts.c, [27](#)
 - consts.h, [31](#)
- read_btn
 - io.c, [44](#)
 - io.h, [57](#)
- read_external_buttons
 - io.c, [45](#)
 - io.h, [57](#)
- read_func_btn
 - io.c, [45](#)
 - io.h, [57](#)
- read_qubit_btn
 - io.c, [46](#)
 - io.h, [58](#)
- remove_zero_amp_states
 - display.c, [34](#)
 - display.h, [39](#)
- repetition_code
 - algo.c, [16](#)
 - algo.h, [22](#)
- reset_cycle
 - io.c, [46](#)
 - io.h, [58](#)
- rX
 - consts.c, [27](#)
 - consts.h, [30](#)
- send_byte_spi_1
 - spi.c, [80](#)
 - spi.h, [83](#)
- set_external_led
 - io.c, [46](#)
 - io.h, [59](#)
- set_led
 - io.c, [47](#)
 - io.h, [59](#)
- set_strobe
 - io.c, [47](#)
 - io.h, [60](#)
- setup_external_buttons
 - io.c, [48](#)
 - io.h, [60](#)
- setup_external_leds
 - io.c, [48](#)
 - io.h, [60](#)
- setup_io
 - io.c, [48](#)
 - io.h, [61](#)
- setup_spi
 - spi.c, [81](#)
 - spi.h, [83](#)
- setup_timer
 - time.c, [86](#)
 - time.h, [87](#)
- sign
 - quantum.c, [70](#)
 - quantum.h, [77](#)
- single_qubit_op
 - quantum.c, [70](#)
 - quantum.h, [77](#)
- single_qubit_op_new
 - quantum.c, [71](#)
- sort_states
 - display.c, [35](#)
 - display.h, [39](#)
- spi.c
 - send_byte_spi_1, [80](#)
 - setup_spi, [81](#)
- spi.h
 - send_byte_spi_1, [83](#)
 - setup_spi, [83](#)
- square_magnitude
 - quantum.c, [72](#)
 - quantum.h, [78](#)
- swap_test
 - algo.c, [17](#)
 - algo.h, [23](#)
- TLC591x_mode_switch
 - io.c, [49](#)
- time.c
 - setup_timer, [86](#)
- time.h
 - setup_timer, [87](#)
- toffoli_gate
 - algo.c, [17](#)
 - algo.h, [23](#)
- toggle_strobe
 - io.c, [49](#)
 - io.h, [61](#)
- two_gate
 - algo.c, [18](#)
 - algo.h, [24](#)
- two_gate_display
 - algo.c, [18](#)
 - algo.h, [24](#)
- update_display_buffer
 - io.c, [50](#)
 - io.h, [62](#)
- write_display_driver
 - io.c, [50](#)
 - io.h, [62](#)
- X
 - consts.c, [27](#)
 - consts.h, [31](#)
- Y
 - consts.c, [28](#)
 - consts.h, [31](#)
- Z

- consts.c, [28](#)
 - consts.h, [31](#)
- zero_state
 - quantum.c, [72](#)
 - quantum.h, [79](#)