

Quantum Computer Outreach Project

Generated by Doxygen 1.8.13

Contents

1	Todo List	1
2	Data Structure Index	3
2.1	Data Structures	3
3	File Index	5
3.1	File List	5
4	Data Structure Documentation	7
4.1	cycle_node Struct Reference	7
4.1.1	Detailed Description	8
4.2	LED Struct Reference	8
4.2.1	Detailed Description	8
4.3	LED_GLOBAL Struct Reference	8
4.3.1	Detailed Description	9
4.4	RGB Struct Reference	9
4.4.1	Detailed Description	9

5	File Documentation	11
5.1	dspic33e/qcomp-sim-c.X/algo.c File Reference	11
5.1.1	Detailed Description	12
5.1.2	Function Documentation	12
5.1.2.1	gate()	12
5.1.2.2	two_gate()	12
5.2	dspic33e/qcomp-sim-c.X/algo.h File Reference	12
5.2.1	Detailed Description	13
5.2.2	Function Documentation	14
5.2.2.1	gate()	14
5.2.2.2	two_gate()	14
5.3	dspic33e/qcomp-sim-c.X/config.h File Reference	14
5.3.1	Detailed Description	15
5.4	dspic33e/qcomp-sim-c.X/io.c File Reference	15
5.4.1	Detailed Description	17
5.4.2	Macro Definition Documentation	17
5.4.2.1	BTN_CHIP_NUM	17
5.4.3	Function Documentation	17
5.4.3.1	__attribute__()	18
5.4.3.2	add_to_cycle()	18
5.4.3.3	flash_all()	19
5.4.3.4	flash_led()	19
5.4.3.5	led_color_int()	19
5.4.3.6	led_cycle_test()	20
5.4.3.7	read_btn()	20
5.4.3.8	read_external_buttons()	20
5.4.3.9	reset_cycle()	21
5.4.3.10	set_external_led()	21
5.4.3.11	set_led()	21
5.4.3.12	set_strobe()	22

5.4.3.13	setup_external_leds()	22
5.4.3.14	setup_io()	22
5.4.3.15	TLC591x_mode_switch()	23
5.4.3.16	toggle_strobe()	23
5.4.3.17	update_display_buffer()	23
5.4.3.18	write_display_driver()	24
5.4.4	Variable Documentation	24
5.4.4.1	buttons	25
5.4.4.2	isr_counter	25
5.4.4.3	led_global	25
5.5	dspic33e/qcomp-sim-c.X/io.h File Reference	25
5.5.1	Detailed Description	28
5.5.2	Function Documentation	28
5.5.2.1	add_to_cycle()	28
5.5.2.2	flash_all()	28
5.5.2.3	flash_led()	29
5.5.2.4	led_color_int()	29
5.5.2.5	led_cycle_test()	29
5.5.2.6	read_btn()	30
5.5.2.7	read_external_buttons()	30
5.5.2.8	reset_cycle()	30
5.5.2.9	set_external_led()	30
5.5.2.10	set_led()	31
5.5.2.11	set_strobe()	31
5.5.2.12	setup_external_leds()	32
5.5.2.13	setup_io()	32
5.5.2.14	toggle_strobe()	32
5.5.2.15	update_display_buffer()	33
5.5.2.16	write_display_driver()	33
5.6	dspic33e/qcomp-sim-c.X/main.c File Reference	34

5.6.1	Detailed Description	35
5.6.2	Function Documentation	35
5.6.2.1	main()	35
5.7	dspic33e/qcomp-sim-c.X/quantum.c File Reference	36
5.7.1	Detailed Description	37
5.7.2	Macro Definition Documentation	37
5.7.2.1	NUM_MAX_AMPS	37
5.7.3	Function Documentation	37
5.7.3.1	absolute()	37
5.7.3.2	controlled_qubit_op()	38
5.7.3.3	display_cycle()	38
5.7.3.4	make_ops()	39
5.7.3.5	make_ops_4()	39
5.7.3.6	mat_mul()	40
5.7.3.7	mat_mul_4()	40
5.7.3.8	qubit_display()	41
5.7.3.9	remove_zero_amp_states()	42
5.7.3.10	single_qubit_op()	43
5.7.3.11	sort_states()	44
5.7.3.12	zero_state()	44
5.8	dspic33e/qcomp-sim-c.X/quantum.h File Reference	45
5.8.1	Detailed Description	46
5.8.2	Function Documentation	46
5.8.2.1	controlled_qubit_op()	46
5.8.2.2	make_ops()	47
5.8.2.3	mat_mul()	48
5.8.2.4	mat_mul_4()	48
5.8.2.5	qubit_display()	49
5.8.2.6	remove_zero_amp_states()	51
5.8.2.7	single_qubit_op()	51

5.8.2.8	sort_states()	53
5.8.2.9	zero_state()	53
5.9	dspic33e/qcomp-sim-c.X/spi.c File Reference	53
5.9.1	Detailed Description	54
5.9.2	Function Documentation	54
5.9.2.1	send_byte_spi_1()	54
5.9.2.2	setup_spi()	55
5.10	dspic33e/qcomp-sim-c.X/spi.h File Reference	56
5.10.1	Detailed Description	56
5.10.2	Function Documentation	57
5.10.2.1	send_byte_spi_1()	57
5.10.2.2	setup_spi()	57
5.11	dspic33e/qcomp-sim-c.X/tests.c File Reference	58
5.11.1	Detailed Description	59
5.11.2	Function Documentation	59
5.11.2.1	dim_leds()	59
5.11.2.2	swap_test()	59
5.12	dspic33e/qcomp-sim-c.X/tests.h File Reference	60
5.12.1	Detailed Description	61
5.12.2	Function Documentation	61
5.12.2.1	delay()	61
5.12.2.2	dim_leds()	61
5.12.2.3	swap_test()	62
5.13	dspic33e/qcomp-sim-c.X/time.c File Reference	62
5.13.1	Detailed Description	62
5.13.2	Function Documentation	63
5.13.2.1	delay()	63
5.13.2.2	setup_timer()	63
5.14	dspic33e/qcomp-sim-c.X/time.h File Reference	63
5.14.1	Detailed Description	64
5.14.2	Function Documentation	64
5.14.2.1	delay()	64
5.14.2.2	setup_timer()	64

Chapter 1

Todo List

Global `absolute` (Complex x)

Check that the complex part is small

Global `BTN_CHIP_NUM`

read buttons

Global `controlled_qubit_op` (Complex op[2][2], int ctrl, int targ, Complex state[], int N)

This expression can probably be simplified or broken over lines.

Global `led_cycle_test` (void)

This won't work now: `write_display_driver(counter);`

Global `mat_mul` (Complex M[2][2], Complex V[], int i, int j)

Because of the way the array types work (you can't pass a multidimensional array of unknown size) we will also need a function for 4x4 matrix multiplication.

Global `mat_mul_4` (Complex M[4][4], Complex V[], int i, int j, int k, int l)

remove or make this general? It might not even be needed :(

Global `qubit_display` (Complex state[], int Qnum)

rename to `display_average`

Global `qubit_display` (Complex state[], int Qnum)

rename to `display_average`

Global `read_external_buttons` (void)

How long should this be?

button remappings...

Global `reset_cycle` (void)

do it

Global `setup_timer` ()

distinguish between the two different timers here...

Global `sort_states` (Complex state[], int num_qubits)

this function...

Global `TLC591x_mode_switch` (int mode)

mode switcher for `LED` Driver

Global `write_display_driver` (void)

How long should this be?

Chapter 2

Data Structure Index

2.1 Data Structures

Here are the data structures with brief descriptions:

cycle_node	The basis for a linked list of states to cycle	7
LED	Each LED has the following type	8
LED_GLOBAL	Pin mappings	8
RGB	A type for holding red, green, blue values	9

Chapter 3

File Index

3.1 File List

Here is a list of all documented files with brief descriptions:

dspic33e/qcomp-sim-c.X/ algo.c	
Contains quantum algorithms to be run	11
dspic33e/qcomp-sim-c.X/ algo.h	
Header file for algorithms	12
dspic33e/qcomp-sim-c.X/ config.h	
General config settings #pragma for microcontroller	14
dspic33e/qcomp-sim-c.X/ io.c	
Contains all the functions for reading buttons and writing to LEDs	15
dspic33e/qcomp-sim-c.X/ io.h	
Description: Header file for input output functions	25
dspic33e/qcomp-sim-c.X/ main.c	
The main function	34
dspic33e/qcomp-sim-c.X/ quantum.c	
Description: Contains matrix and vector arithmetic for simulating one qubit	36
dspic33e/qcomp-sim-c.X/ quantum.h	
Description: Header file containing all the matrix arithmetic for simulating a single qubit	45
dspic33e/qcomp-sim-c.X/ spi.c	
Description: Functions for communicating with serial devices	53
dspic33e/qcomp-sim-c.X/ spi.h	
Description: SPI communication functions	56
dspic33e/qcomp-sim-c.X/ tests.c	
Description: Contains all the tests we have performed on the micro- controller	58
dspic33e/qcomp-sim-c.X/ tests.h	
Description: Header file containing all the tests we performed	60
dspic33e/qcomp-sim-c.X/ time.c	
Description: Functions to control the on chip timers	62
dspic33e/qcomp-sim-c.X/ time.h	
Description: Header file containing all the timing functions	63

Chapter 4


Data Structure Documentation

4.1 cycle_node Struct Reference

The basis for a linked list of states to cycle.

```
#include <io.h>
```

Collaboration diagram for cycle_node:

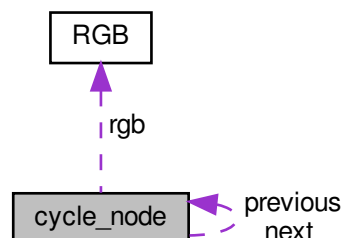

Data Fields

- `RGB * rgb`
Array of corresponding `RGB` values.
- `int size`
The size of the above arrays.
- `struct cycle_node * next`
Pointer to the next item.
- `struct cycle_node * previous`
Pointer to the previous item.

4.1.1 Detailed Description

The basis for a linked list of states to cycle.

The documentation for this struct was generated from the following file:

- [dspic33e/qcomp-sim-c.X/io.h](#)

4.2 LED Struct Reference

Each [LED](#) has the following type.

```
#include <io.h>
```

Data Fields

- int **R** [2]
Red mapping array: [chip number, line number].
- int **G** [2]
Green mapping array.
- unsigned __Fract **N_R**
Blue mapping array.
- unsigned __Fract **N_G**
The R brightness.
- unsigned __Fract **N_B**
The G brightness.

4.2.1 Detailed Description

Each [LED](#) has the following type.

The type holds the information about the position of the [RGB](#) lines in the display driver array and also the brightness of the [RGB](#) lines. The counters are used by a timer interrupt service routine pulse the [RGB](#) LEDs at a specified rate.

The position of the [LED](#) lines are contained in an array

The type of the counter is *Fract* to facilitate easy comparison with the *N** variables which used the fractional type.

The documentation for this struct was generated from the following file:

- [dspic33e/qcomp-sim-c.X/io.h](#)

4.3 LED_GLOBAL Struct Reference

pin mappings

```
#include <io.h>
```


Data Fields

- int [strobe_leds](#)
Bit set the LEDs which are strobing.
- int [strobe_state](#)
Bit zero is the current state (on/off)

4.3.1 Detailed Description

pin mappings

```
// Pins for LE and OE on port D
// OE = RD4 = uC:81 = J1:28 = J10:14
// LE = RD3 = uC:78 = J1:40 = J11:18
//
// Pins for SH and CLK_INH on port D
// SH = RD5 = uC:82 = J1:25 = J10:13
// CLK_INH = RD8 = uC:68 = J1:58 = J11:25
//
```

Global [LED](#) strobing state parameter

The documentation for this struct was generated from the following file:

- [dspic33e/qcomp-sim-c.X/io.h](#)

4.4 RGB Struct Reference

A type for holding red, green, blue values.

```
#include <io.h>
```

Data Fields

- unsigned _Fract **R**
- unsigned _Fract **G**
- unsigned _Fract **B**

4.4.1 Detailed Description

A type for holding red, green, blue values.

The documentation for this struct was generated from the following file:

- [dspic33e/qcomp-sim-c.X/io.h](#)


Chapter 5

File Documentation

5.1 dspic33e/qcomp-sim-c.X/algo.c File Reference

Contains quantum algorithms to be run.

```
#include "io.h"
#include "quantum.h"
#include "algo.h"
#include "time.h"
#include <math.h>
Include dependency graph for algo.c:
```

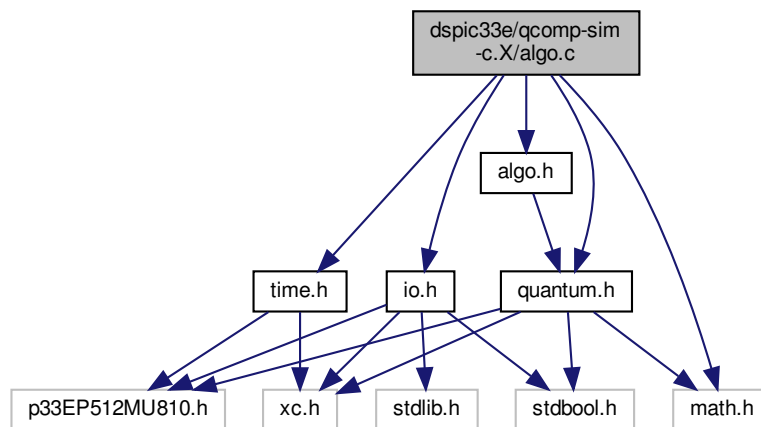

Functions

- void `gate` (`Complex` op[2][2], int qubit, `Complex` state[], int num_qubits)
perform single qubit gate
- void `two_gate` (`Complex` op[2][2], int ctrl, int targ, `Complex` state[], int num_qubits)
perform controlled single qubit gate
- void `swap` (int q1, int q2, `Complex` state[], int num_qubits)
swap using 3 cNots

5.1.1 Detailed Description

Contains quantum algorithms to be run.

5.1.2 Function Documentation

5.1.2.1 gate()

```
void gate (
    Complex op[2][2],
    int qubit,
    Complex state[],
    int num_qubits )
```

perform single qubit gate

does 2x2 operator on state vector displays the average state of the qubit by tracing over all waits to let the user see the state (LEDs)

5.1.2.2 two_gate()

```
void two_gate (
    Complex op[2][2],
    int ctrl,
    int targ,
    Complex state[],
    int num_qubits )
```

perform controlled single qubit gate


does controlled 2x2 operator

5.2 dspic33e/qcomp-sim-c.X/algo.h File Reference


header file for algorithms

```
#include "quantum.h"
```

Include dependency graph for algo.h:

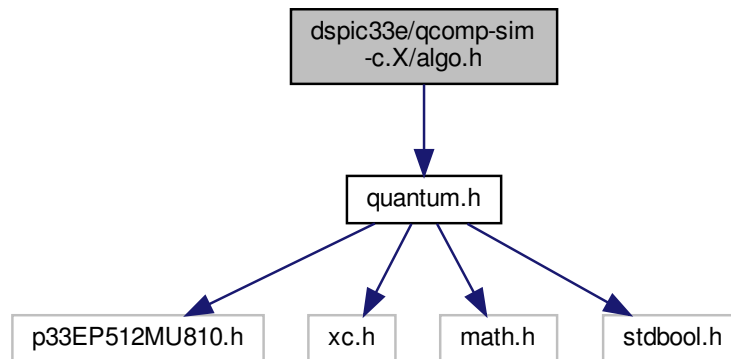

This graph shows which files directly or indirectly include this file:

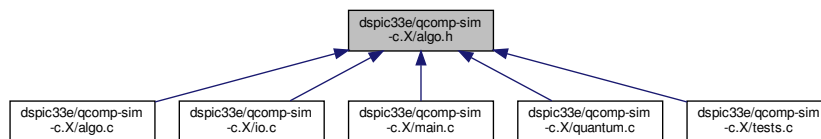

Macros

- `#define NUM_QUBITS 4`
- `#define STATE_LENGTH 16`

Functions

- void `gate` (`Complex` op[2][2], int qubit, `Complex` state[], int num_qubits)
perform single qubit gate
- void `two_gate` (`Complex` op[2][2], int ctrl, int targ, `Complex` state[], int num_qubits)
perform controlled single qubit gate
- void `swap` (int q1, int q2, `Complex` state[], int num_qubits)
swap using 3 cNots

5.2.1 Detailed Description

header file for algorithms

5.2.2 Function Documentation

5.2.2.1 gate()

```
void gate (
    Complex op[2][2],
    int qubit,
    Complex state[],
    int num_qubits )
```

perform single qubit gate

does 2x2 operator on state vector displays the average state of the qubit by tracing over all waits to let the user see the state (LEDs)

5.2.2.2 two_gate()

```
void two_gate (
    Complex op[2][2],
    int ctrl,
    int targ,
    Complex state[],
    int num_qubits )
```


perform controlled single qubit gate

does controlled 2x2 operator

5.3 dspic33e/qcomp-sim-c.X/config.h File Reference

General config settings #pragma for microcontroller.

This graph shows which files directly or indirectly include this file:



5.3.1 Detailed Description

General config settings #pragma for microcontroller.


Description: Include this once at the top of main

5.4 dspic33e/qcomp-sim-c.X/io.c File Reference

Contains all the functions for reading buttons and writing to LEDs.

```
#include "io.h"
#include "time.h"
#include "spi.h"
#include "algo.h"
```

Include dependency graph for io.c:

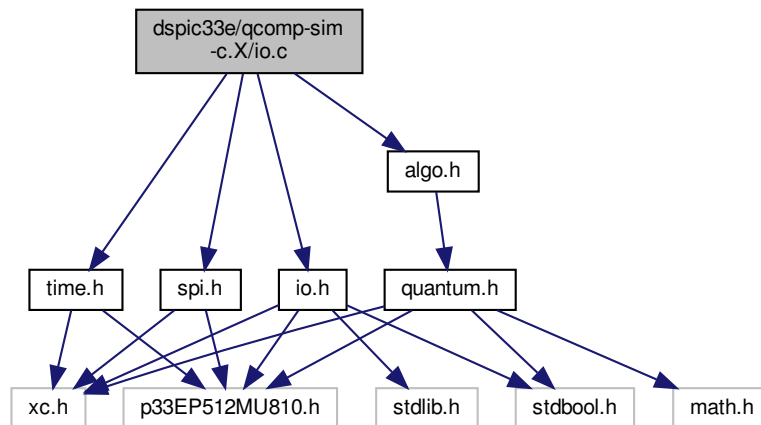

Macros

- #define **DISPLAY_CHIP_NUM** 2
- #define **MAX_CYCLE_LENGTH** 16
- #define **PERIOD** 500000
- #define **BTN_CHIP_NUM** 2

Read external buttons.

Functions

- int **led_color_int** (int device, int R, int G, int B)
Takes led number & [RGB](#) -> returns integer for sending via SPI to set the [LED](#).
- int **setup_io** (void)
Set up LEDs and buttons on port D.
- void **__attribute__** ((__interrupt__, no_auto_psv))

- The max value for isr_counter.*

 - void `setup_external_leds` (void)

Set external variable RGB LEDs.

 - int `add_to_cycle` (RGB colors[], int size)
- Add an item to the list of states to cycle.*
- int `reset_cycle` (void)
- Reset the LED display cycle_*.*
- void `stop_external_leds` (void)
- Stop LEDs flashing.*
- void `set_strobe` (int color, int state)
- Set an LED strobing.*
- void `toggle_strobe` (int color)
- Toggle LED strobe.*
- int `set_led` (int color, int state)
- Turn a particular LED on or off.*
- int `read_btn` (int btn)
- Read the state of a push button.*
- void `leds_off` (void)
- Turn all the LEDs off.*
- void `flash_led` (int color, int number)
- Flash LED a number of times.*
- void `flash_all` (int number)
- Flash all the LEDs a number of times.*
- int `update_display_buffer` (int n, bool R, bool G, bool B)
 - int `write_display_driver` (void)
- Turn on an LED via the external display driver.*
- int `TLC591x_mode_switch` (int mode)
- Switch between normal and special mode.*
- int `set_external_led` (int index, unsigned _Fract R, unsigned _Fract G, unsigned _Fract B)
- Updates color properties of global led array.*
- int `read_external_buttons` (void)
- Update the buttons array (see declaration above)*
- int `led_cycle_test` (void)
- Loop to cycle through LEDs 0 - 15.*
- void `varying_leds` (void)
- Routine to test the set_external_led function.*

Variables

- int `buttons` [16]
- Contains the button states.*
- `LED_GLOBAL led_global` = {0}
 - `LED led` [LED_NUM]
- The LED array – global in this file.*
- int `display_buf` [DISPLAY_CHIP_NUM] = {0}
- Display buffer to be written to display driver.*
- unsigned _Fract `isr_counter` = 0
- Counter for the interrupt service routine _T5Interrupt.*
- unsigned _Fract `isr_res` = 0.01
- Counter value.*

- const unsigned _Fract `isr_limit` = 0.95
Counter resolution.
- `RGB cycle_colors` [MAX_CYCLE_LENGTH][NUM_QUBITS]
- int `last_row` = 0
- int `cycle_counter` = 0

5.4.1 Detailed Description

Contains all the functions for reading buttons and writing to LEDs.

Author

J Scott

Date

8/11/18

5.4.2 Macro Definition Documentation

5.4.2.1 BTN_CHIP_NUM

```
#define BTN_CHIP_NUM 2
```

Read external buttons.

The external buttons are interfaced to the microcontroller via a shift register. Data is shifted in a byte at a time using the SPI 3 module. The sequence to read the buttons is as follows:

1) Momentarily bring SH low to latch button data into the shift registers 2) Bring CLK_INH low to enable the clock input on the shift register 3) Start the SPI 3 clock and read data in via the SDI 3 line

The control lines SH and CLK_INH are on port D

Todo read buttons

5.4.3 Function Documentation

5.4.3.1 `__attribute__()`

```
void __attribute__ (
    (__interrupt__, no_auto_psv) )
```

The max value for `isr_counter`.

Timer 6 and 7 for cycling superposition states.

Interrupt service routine for timer 4

Interrupt service routines are automatically called by the microcontroller when an event occurs. In this case, `T5Interrupt` is called when the 32 bit timer formed from T4 and T5 reaches its preset period. The silly name and sill attributes are so that the compiler can correctly map the function in the microcontroller memory. More details of interrupts and interrupt vectors can be found in the compiler manual and the dsPIC33E datasheet.

The job of this routine is to control the modulated brightnesses of the RBG LEDs. This routine is set to be called periodically with a very long period on the time scale of microcontroller operations, but very fast in comparison to what the eye can see. For example, once every 100us. Loop over all the LEDs (the index `i`).

Decide whether R, G or B should be turned off

Write the display buffer data to the display drivers It's important this line goes here rather than after the the final `update_display_buffer` below. Otherwise you get a flicker due to the LEDs all coming on at the start of this loop

Reset the counter

Turn on all the LEDs back on

Write a row to the leds

5.4.3.2 `add_to_cycle()`

```
int add_to_cycle (
    RGB colors[],
    int size )
```

Add an item to the list of states to cycle.

Add an element to the states to be cycled.

Parameters

<i>leds</i>	An array of LED indices
<i>colors</i>	Corresponding RGB values for each LED
<i>size</i>	The size of both the above arrays

This function is used to add a set of [LED](#) states ([RGB](#) values) into the list of states being cycled.

Repeatedly calling this function adds a new state to the end of the list of displayed states. [LED](#) states are shown in the order this function is called.

The implementation uses the linked list type [cycle_node](#). Each call of this function adds a new element to the end of cycle node Add the new colors to top of array

5.4.3.3 flash_all()

```
void flash_all (
    int number )
```

Flash all the LEDs a number of times.

Parameters

<i>number</i>	
---------------	--

5.4.3.4 flash_led()

```
void flash_led (
    int color,
    int number )
```

Flash LED a number of times.

Flash one LED a number of times.

5.4.3.5 led_color_int()

```
int led_color_int (
    int device,
    int R,
    int G,
    int B )
```

Takes led number & RGB -> returns integer for sending via SPI to set the LED.

Parameters

<i>device</i>	input LED number to change
<i>R</i>	red value between 0 & 1
<i>G</i>	green value between 0 & 1
<i>B</i>	blue value between 0 & 1

Returns

Returns int to be sent to LED Driver

convention RGB -> 000

Each LED takes 3 lines, assumes there are no gaps between LED channels "device" goes between 0 to $2^n - 1$

5.4.3.6 led_cycle_test()

```
int led_cycle_test (  
    void )
```

Loop to cycle through LEDs 0 - 15.

Todo This won't work now: write_display_driver(counter);

5.4.3.7 read_btn()

```
int read_btn (  
    int btn )
```

Read the state of a push button.

Parameters

<i>btn</i>	
------------	--

Note

How well do you know C

5.4.3.8 read_external_buttons()

```
int read_external_buttons (  
    void )
```

Update the buttons array (see declaration above)

SH pin

Todo How long should this be?

Todo button remappings...

5.4.3.9 reset_cycle()

```
int reset_cycle (
    void )
```

Reset the LED display cycle _*.

Reset the display cycle. Called before adding anything.

Todo do it

5.4.3.10 set_external_led()

```
int set_external_led (
    int index,
    unsigned _Fract R,
    unsigned _Fract G,
    unsigned _Fract B )
```

Updates color properties of global led array.

Parameters

<i>led_index</i>	
<i>R</i>	red value between 0 & 1
<i>G</i>	green value between 0 & 1
<i>B</i>	blue value between 0 & 1

Returns

0 if successful, -1 otherwise

Use the function to set the RGB level of an LED. The LED is chosen using the

Parameters

<i>led_index.</i>	The
<i>R</i>	

5.4.3.11 set_led()

```
int set_led (
    int color,
    int state )
```

Turn a particular LED on or off.

Parameters

<i>color</i>	
<i>state</i>	

5.4.3.12 set_strobe()

```
void set_strobe (
    int color,
    int state )
```

Set an [LED](#) strobing.

Parameters

<i>color</i>	
<i>state</i>	

5.4.3.13 setup_external_leds()

```
void setup_external_leds (
    void )
```

Set external variable [RGB](#) LEDs.

Initialise [LED](#) lines

Initialise parameters to zero

Initialise display buffer to zero

Set flashing period

Turn timer 6 on

5.4.3.14 setup_io()

```
int setup_io (
    void )
```

Set up LEDs and buttons on port D.

< Set port c digital for spi3

Set the OE pin high

Set OE(ED2) pin

Set the SH pin high

Set SH pin

set CLK_INH high while buttons are pressed

5.4.3.15 TLC591x_mode_switch()

```
int TLC591x_mode_switch (
    int mode )
```

Switch between normal and special mode.

The mode switch for the TLC591x chip is a bit tricky because it involves synchronising the control lines [LE\(ED1\)](#) and OE(ED2) on Port D with the SPI 1 clock. To initiate a mode switch, OE(ED2) must be brought low for one clock cycle, and then the value of [LE\(ED1\)](#) two clock cycles later determines the new mode. See the diagrams on page 19 of the datasheet

So long as the timing is not strict, we can probably implement the mode switch by starting a non-blocking transfer of 1 byte to the device (which starts the SPI 1 clock), followed by clearing OE(ED2) momentarily and then setting the value of [LE\(ED1\)](#) as required. So long as those two things happen before the SPI 1 clock finishes the procedure will probably work. (The reason is the lack of max timing parameters on page 9 for the setup and hold time for ED1 and ED2, which can therefore presumably be longer than one clock cycle.)

Parameters

<i>mode</i>	
-------------	--

Todo mode switcher for [LED](#) Driver

5.4.3.16 toggle_strobe()

```
void toggle_strobe (
    int color )
```

Toggle [LED](#) strobe.

Parameters

<i>color</i>	
--------------	--

5.4.3.17 update_display_buffer()

```
int update_display_buffer (
    int n,
    bool R,
    bool G,
    bool B )
```

Parameters

<i>index</i>	LED number to modify
--------------	--------------------------------------

Parameters

<i>R</i>	Intended value of the R led
<i>G</i>	Intended value of the G led
<i>B</i>	Intended value of the B led

Returns

0 if successful

Could this get any worse!

This function is supposed to make the display writing process more efficient. It updates a global display buffer which is written periodically to the led display drivers. Instead of the display driver function re-reading the desired state of all the [LED](#) lines every time it is called, this function can be used to update only the lines that have changed.

There are quite a few potential bugs in here, mainly array out of bounds if the DISPLAY_CHIP_NUM is not set correctly or the [LED RGB](#) lines are wrong. (Or if there are just bugs.) Set or clear the red [LED](#) of the nth [LED](#)

Set or clear the red [LED](#) of the nth [LED](#)

Set or clear the red [LED](#) of the nth [LED](#)

5.4.3.18 write_display_driver()

```
int write_display_driver (
    void )
```

Turn on an [LED](#) via the external display driver.

Send a byte to the display driver.

On power on, the chip (TLC591x) is in normal mode which means that the clocked bytes sent to the chip set which LEDs are on and which are off (as opposed to setting the current of the LEDs)

To write to the device, use the SPI module to write a byte to the SDI 1 pin on the chip. Then momentarily set the [LE\(ED1\)](#) pin to latch the data onto the output register. Finally, bring the OE(ED2) pin low to enable the current sinking to turn on the LEDs. See the timing diagram on page 17 of the datasheet for details.

[LE\(ED1\)](#) and OE(ED2) will be on Port D Set [LE\(ED1\)](#) pin

Todo How long should this be?

5.4.4 Variable Documentation

5.4.4.1 buttons

```
int buttons[16]
```

Contains the button states.

Each entry in the array is either 1 if the button is pressed or 0 if not. The array is accessed globally using 'extern buttons;' in a *.c file. Read buttons array us updated by calling read_external_buttons

5.4.4.2 isr_counter

```
unsigned _Fract isr_counter = 0
```

Counter for the interrupt service routine _T5Interrupt.

These variables are for keeping track of the interrupt based [LED](#) pulsing. The type is _Fract because it is easier to directly compare two _Fracts than attempt multiplication of integers and _Fracts (which isn't supported) The limit is not 1 because _Fract types do not go up to 1.

It's probably a good idea to make sure the isr_res counter doesn't overflow (by ensuring that isr_res + isr_limit does not exceed 0.999..., the max value of unsigned _Fract).

5.4.4.3 led_global

```
LED_GLOBAL led_global = {0}
```

Parameters


<i>led_global</i>	Global LED strobing state parameter
-------------------	---

5.5 dspic33e/qcomp-sim-c.X/io.h File Reference


Description: Header file for input output functions.

```
#include "p33EP512MU810.h"
#include "xc.h"
#include <stdbool.h>
#include <stdlib.h>
```

Include dependency graph for `io.h`:

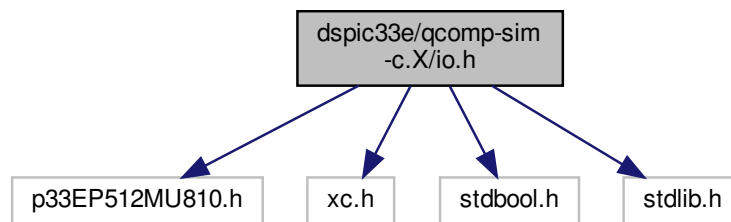

This graph shows which files directly or indirectly include this file:

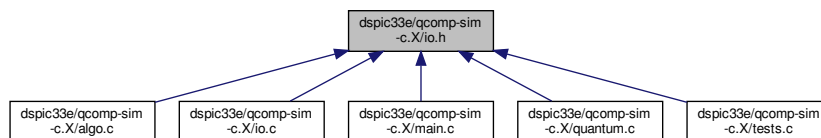

Data Structures

- struct `LED_GLOBAL`
pin mappings
- struct `LED`
Each LED has the following type.
- struct `RGB`
A type for holding red, green, blue values.
- struct `cycle_node`
The basis for a linked list of states to cycle.

Macros

- `#define red 0`
Locations of LEDs and buttons on Port D.
- `#define amber 1`
- `#define green 2`
- `#define sw1 6`
- `#define sw2 7`
- `#define sw3 13`
- `#define off 0`
- `#define on 1`
- `#define LE 3`
Control for TLC591x chip on Port D.

- #define **OE** 4
- #define **SH** 5
Control lines for SNx4HC165 chip.
- #define **CLK_INH** 8
- #define **LED_NUM** 4
The number of external LEDs.

Typedefs

- typedef struct **cycle_node** **cycle_node_t**
The basis for a linked list of states to cycle.

Functions

- int **setup_io** (void)
Set up LEDs and buttons on port D.
- void **setup_external_leds** (void)
*Set external variable **RGB** LEDs.*
- int **set_led** (int color, int state)
*Turn a particular **LED** on or off.*
- int **read_btn** (int btn)
Read the state of a push button.
- void **leds_off** (void)
Turn all the LEDs off.
- void **flash_led** (int color, int number)
*Flash one **LED** a number of times.*
- void **flash_all** (int number)
Flash all the LEDs a number of times.
- void **set_strobe** (int color, int state)
*Set an **LED** strobing.*
- void **toggle_strobe** (int color)
*Toggle **LED** strobe.*
- int **update_display_buffer** (int led_index, bool R, bool G, bool B)
- int **write_display_driver** (void)
Send a byte to the display driver.
- int **set_external_led** (int led_index, unsigned _Fract R, unsigned _Fract G, unsigned _Fract B)
Updates color properties of global led array.
- int **led_color_int** (int device, int R, int G, int B)
*Takes led number & **RGB** -> returns integer for sending via SPI to set the **LED**.*
- int **led_cycle_test** (void)
Loop to cycle through LEDs 0 - 15.
- int **read_external_buttons** (void)
Update the buttons array (see declaration above)
- int **add_to_cycle** (**RGB** colors[], int size)
Add an element to the states to be cycled.
- int **reset_cycle** (void)
Reset the display cycle. Called before adding anything.

5.5.1 Detailed Description

Description: Header file for input output functions.

Include it at the top of any C source file which uses buttons and LEDs. It also defines various constants representing the positions of the buttons and LEDs on port D.

5.5.2 Function Documentation

5.5.2.1 add_to_cycle()

```
int add_to_cycle (
    RGB colors[],
    int size )
```

Add an element to the states to be cycled.

Add an element to the states to be cycled.

Parameters

<i>leds</i>	An array of LED indices
<i>colors</i>	Corresponding RGB values for each LED
<i>size</i>	The size of both the above arrays

This function is used to add a set of [LED](#) states ([RGB](#) values) into the list of states being cycled.

Repeatedly calling this function adds a new state to the end of the list of displayed states. [LED](#) states are shown in the order this function is called.

The implementation uses the linked list type [cycle_node](#). Each call of this function adds a new element to the end of cycle node Add the new colors to top of array

5.5.2.2 flash_all()

```
void flash_all (
    int number )
```

Flash all the LEDs a number of times.

Parameters

<i>number</i>	
---------------	--

5.5.2.3 flash_led()

```
void flash_led (
    int color,
    int number )
```

Flash one LED a number of times.

Parameters

<i>color</i>	
<i>number</i>	

Flash one LED a number of times.

5.5.2.4 led_color_int()

```
int led_color_int (
    int device,
    int R,
    int G,
    int B )
```

Takes led number & RGB -> returns integer for sending via SPI to set the LED.

Parameters

<i>device</i>	input LED number to change
<i>R</i>	red value between 0 & 1
<i>G</i>	green value between 0 & 1
<i>B</i>	blue value between 0 & 1

Returns

Returns int to be sent to LED Driver

convention RGB -> 000

Each LED takes 3 lines, assumes there are no gaps between LED channels "device" goes between 0 to $2^n - 1$

5.5.2.5 led_cycle_test()

```
int led_cycle_test (
    void )
```

Loop to cycle through LEDs 0 - 15.

Todo This won't work now: write_display_driver(counter);

5.5.2.6 read_btn()

```
int read_btn (
    int btn )
```

Read the state of a push button.

Parameters

<i>btn</i>	
------------	--

Note

How well do you know C

5.5.2.7 read_external_buttons()

```
int read_external_buttons (
    void )
```

Update the buttons array (see declaration above)

SH pin

Todo How long should this be?

Todo button remappings...

5.5.2.8 reset_cycle()

```
int reset_cycle (
    void )
```

Reset the display cycle. Called before adding anything.

Reset the display cycle. Called before adding anything.

Todo do it

5.5.2.9 set_external_led()

```
int set_external_led (
    int index,
    unsigned _Fract R,
    unsigned _Fract G,
    unsigned _Fract B )
```

Updates color properties of global led array.

Parameters

<i>led_index</i>	
<i>R</i>	red value between 0 & 1
<i>G</i>	green value between 0 & 1
<i>B</i>	blue value between 0 & 1

Returns

0 if successful, -1 otherwise

Use the function to set the [RGB](#) level of an [LED](#). The [LED](#) is chosen using the

Parameters

<i>led_index.</i>	The
<i>R</i>	

5.5.2.10 `set_led()`

```
int set_led (
    int color,
    int state )
```

Turn a particular [LED](#) on or off.

Parameters

<i>color</i>	
<i>state</i>	

5.5.2.11 `set_strobe()`

```
void set_strobe (
    int color,
    int state )
```

Set an [LED](#) strobing.

Parameters

<i>color</i>	
<i>state</i>	

5.5.2.12 `setup_external_leds()`

```
void setup_external_leds (  
    void )
```

Set external variable [RGB](#) LEDs.

Initialise [LED](#) lines

Initialise parameters to zero

Initialise display buffer to zero

Set flashing period

Turn timer 6 on

5.5.2.13 `setup_io()`

```
int setup_io (  
    void )
```

Set up LEDs and buttons on port D.

< Set port c digital for spi3

Set the OE pin high

Set OE(ED2) pin

Set the SH pin high

Set SH pin

set CLK_INH high while buttons are pressed

5.5.2.14 `toggle_strobe()`

```
void toggle_strobe (  
    int color )
```

Toggle [LED](#) strobe.

Parameters

<i>color</i>	
--------------	--

5.5.2.15 update_display_buffer()

```
int update_display_buffer (
    int n,
    bool R,
    bool G,
    bool B )
```

Parameters

<i>led_index</i>	LED number to modify
<i>R</i>	Intended value of the R led
<i>G</i>	Intended value of the G led
<i>B</i>	Intended value of the B led

Returns

0 if successful

Parameters

<i>index</i>	LED number to modify
<i>R</i>	Intended value of the R led
<i>G</i>	Intended value of the G led
<i>B</i>	Intended value of the B led

Returns

0 if successful

Could this get any worse!

This function is supposed to make the display writing process more efficient. It updates a global display buffer which is written periodically to the led display drivers. Instead of the display driver function re-reading the desired state of all the LED lines every time it is called, this function can be used to update only the lines that have changed.

There are quite a few potential bugs in here, mainly array out of bounds if the DISPLAY_CHIP_NUM is not set correctly or the LED RGB lines are wrong. (Or if there are just bugs.) Set or clear the red LED of the nth LED

Set or clear the red LED of the nth LED

Set or clear the red LED of the nth LED

5.5.2.16 write_display_driver()

```
int write_display_driver (
    void )
```

Send a byte to the display driver.

Don't use this function to write to LEDs – use the set_external_led function

Send a byte to the display driver.

On power on, the chip (TLC591x) is in normal mode which means that the clocked bytes sent to the chip set which LEDs are on and which are off (as opposed to setting the current of the LEDs)

To write to the device, use the SPI module to write a byte to the SDI 1 pin on the chip. Then momentarily set the [LE\(ED1\)](#) pin to latch the data onto the output register. Finally, bring the OE(ED2) pin low to enable the current sinking to turn on the LEDs. See the timing diagram on page 17 of the datasheet for details.

[LE\(ED1\)](#) and OE(ED2) will be on Port D Set [LE\(ED1\)](#) pin


Todo How long should this be?

5.6 dspic33e/qcomp-sim-c.X/main.c File Reference

The main function.

```
#include "p33EP512MU810.h"
#include "xc.h"
#include "config.h"
#include "time.h"
#include "io.h"
#include "quantum.h"
#include "tests.h"
#include "spi.h"
#include "algo.h"
```

Include dependency graph for main.c:

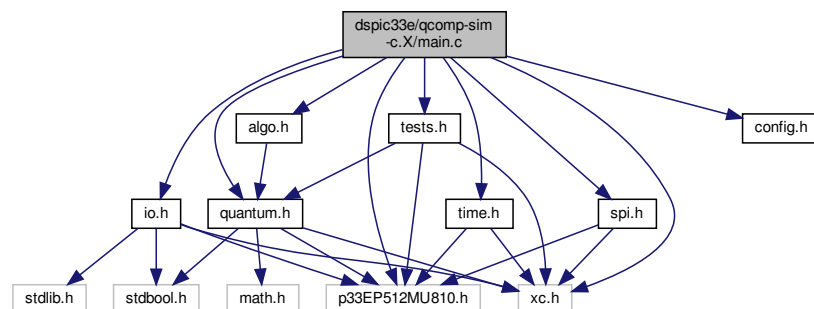

Functions

- int [main](#) (void)

5.6.1 Detailed Description

The main function.

Author

J R Scott

Date

8/11/18

Contains an example of fixed precision 2x2 matrix multiplication for applying operations to a single qubit. The only operations included are H, X and Z so that everything is real (this can be extended later).

All the functions have now been moved into separate files. [io.h](#) and [io.c](#) contain functions for reading and controlling the buttons and LEDs, and [quantum.h/quantum.c](#) contain the matrix arithmetic for simulating one qubit.

Compile command: make (on linux). But if you want to program the micro- controller too or if you're using windows you're better of downloading and installing MPLAB-X <https://www.microchip.com/mplab/mplab-x-ide>.

Note

You also need the microchip xc16 compilers which are available from <https://www.microchip.com/mplab/compilers>

5.6.2 Function Documentation

5.6.2.1 main()

```
int main (
    void )
```

Reading button state

The button states are written into an array of type BUTTON_ARRAY whose

Global variable for button state

Update the buttons variable

Do something if button 0 has been pressed...

Start of the PROGRAM!

<

Note


Really important!

5.7 dspic33e/qcomp-sim-c.X/quantum.c File Reference

Description: Contains matrix and vector arithmetic for simulating one qubit.

```
#include "io.h"
#include "quantum.h"
#include "time.h"
#include "algo.h"
```

Include dependency graph for quantum.c:

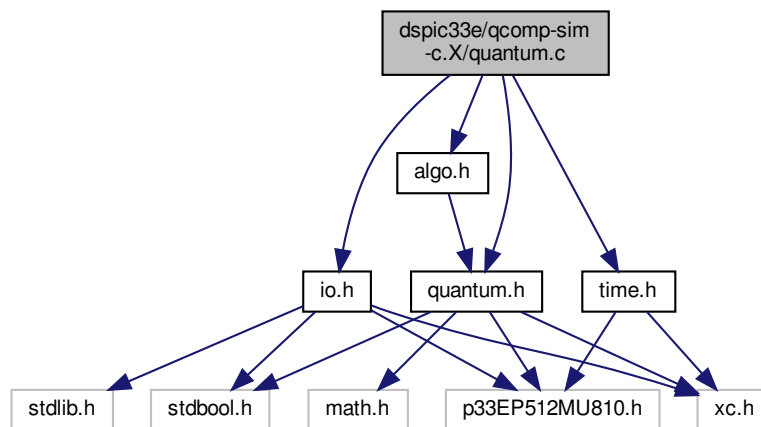

Macros

- `#define NUM_MAX_AMPS 4`

Functions

- void **cadd** (Complex a, Complex b, Complex result)
- void **cmul** (Complex a, Complex b, Complex result)
- **Q15 absolute** (Complex x)
- void **make_ops** (Complex X[2][2], Complex Y[2][2], Complex Z[2][2], Complex H[2][2])
Create complex X, Y, Z and H.
- void **make_ops_4** (Complex CNOT[4][4], Complex CPHASE[4][4], Complex SWAP[4][4])
- void **zero_state** (Complex state[], int Qnum)
Initialise state to the vacuum (zero apart from the first position) Specify the dimension – of the matrix, i.e.
- void **mat_mul** (Complex M[2][2], Complex V[], int i, int j)
2x2 complex matrix multiplication
- void **mat_mul_4** (Complex M[4][4], Complex V[], int i, int j, int k, int l)
4x4 matrix
- void **qubit_display** (Complex state[], int N)
Display the state amplitudes on LEDs.
- void **display_cycle** (Complex state[], int N)
- void **single_qubit_op** (Complex op[2][2], int k, Complex state[], int N)

apply operator

- void [controlled_qubit_op](#) ([Complex](#) op[2][2], int ctrl, int targ, [Complex](#) state[], int N)

selective 2 qubit op function

- int [sort_states](#) ([Complex](#) state[], int num_qubits)
- int [remove_zero_amp_states](#) ([Complex](#) state[], int num_qubits, int disp_state[])

takes state vector, number of qubits and vector to write the nonzero elements of the statevector to.

5.7.1 Detailed Description

Description: Contains matrix and vector arithmetic for simulating one qubit.

5.7.2 Macro Definition Documentation

5.7.2.1 NUM_MAX_AMPS

```
#define NUM_MAX_AMPS 4
```

Parameters

<i>state</i>	The state vector
<i>num_qubits</i>	The number of qubits in the state vector

Returns

This function finds the amplitude of the state vector with the largest magnitude.

5.7.3 Function Documentation

5.7.3.1 absolute()

```
Q15 absolute (
    Complex x )
```

Parameters

<i>x</i>	A complex number to find the absolute value of
----------	--

Returns

The absolute value

Todo Check that the complex part is small

5.7.3.2 controlled_qubit_op()

```
void controlled_qubit_op (
    Complex op[2][2],
    int ctrl,
    int targ,
    Complex state[],
    int N )
```

selective 2 qubit op function

apply controlled 2x2 op

```
///      00 01 10 11
/// 00( 1  0  0  0  )
/// 01( 0  1  0  0  )
/// 10( 0  0 u00 u01 )
/// 11( 0  0 u10 u11 )
///
```

checks that the control qubit is $|1\rangle$ then does 2x2 unitary on remaining state vector ROOT loop: starts at 0, increases in steps of 1

STEP loop: starts at 0, increases in steps of $2^{(k+1)}$

First index is ZERO, second index is ONE

Note

for 2 qubit case check if the index in the ctrl qubit is a 1 then apply the 2x2 unitary else do nothing
sorry. this checks for the first element of the state vector i.e. the target qubits $|0\rangle$ and checks that the state vector element is one which the control qubit has a $|1\rangle$ state -> (root + step)

The second element of the state vector to take is then the first $+2^{(target\ qubit\ number)}$. This also needs to be checked that the control qubit is in the $|1\rangle$.

Todo This expression can probably be simplified or broken over lines.

5.7.3.3 display_cycle()

```
void display_cycle (
    Complex state[],
    int N )
```

Parameters

<i>state</i>	The state to display
<i>N</i>	The length of the state vector

Filter the state

Allocate [RGB](#) array

Decode

Look at the *j*th bit

Reset the cycle

Each iteration of this loop writes

Loop here to add stuff

5.7.3.4 `make_ops()`

```
void make_ops (
    Complex X[2][2],
    Complex Y[2][2],
    Complex Z[2][2],
    Complex H[2][2] )
```

Create complex X, Y, Z and H.

Parameters

<i>X</i>	Pauli X c-Matrix
<i>Z</i>	Pauli Z c-matrix
<i>H</i>	Hadamard c-matrix
<i>Y</i>	Pauli Y c-matrix

Note

IMPLICIT NONE!!!

5.7.3.5 `make_ops_4()`

```
void make_ops_4 (
    Complex CNOT[4][4],
    Complex CPHASE[4][4],
    Complex SWAP[4][4] )
```

Note

```

/// [][] = row, col
/// [2][3] is (0 0 0 0)
///          (0 0 0 0)
///          (0 0 0 1)
///          (0 0 0 0)
///

```

5.7.3.6 mat_mul()

```

void mat_mul (
    Complex M[2][2],
    Complex V[],
    int i,
    int j )

```

2x2 complex matrix multiplication

Parameters

<i>M</i>	complex matrix
<i>V</i>	complex vector
<i>i</i>	integer first element of state vector
<i>j</i>	integer second element of state vector

Todo Because of the way the array types work (you can't pass a multidimensional array of unknown size) we will also need a function for 4x4 matrix multiplication.

5.7.3.7 mat_mul_4()

```

void mat_mul_4 (
    Complex M[4][4],
    Complex V[],
    int i,
    int j,
    int k,
    int l )

```

4x4 matrix

4x4 complex matrix multiplication store results of each row multiplication

```

/// ( a b c d ) * ( p )
/// ( e f g h )   ( q )
/// ( h i j k )   ( r )
/// ( l m n o )   ( s )
///

```

4 cols of V (i,h,k,l)

add the 4 terms together and put into temp for that row

5.7.3.8 qubit_display()

```
void qubit_display (
    Complex state[],
    int N )
```

Display the state amplitudes on LEDs.

Parameters

<i>state</i>	Pass in the state vector
<i>N</i>	The total number of qubits

Note

Currently the function only displays superpositions using the red and blue colors.

The routine works by adding up the squares of the amplitudes corresponding to each state of a given qubit. Suppose there are three qubits. Then the state vector is given by

```
*      index      binary  amplitude
*      -----
*      0          0 0 0      a0
*      1          0 0 1      a1
*      2          0 1 0      a2
*      3          0 1 1      a3
*      4          1 0 0      a4
*      5          1 0 1      a5
*      6          1 1 0      a6
*      7          1 1 1      a7
*      -----
*      Qubit:      2 1 0
*
```

Consider qubit 2. The value of the ZERO state is formed by adding up all the amplitudes corresponding to its ZERO state. That is, indices 0, 1, 2 and 3. The ONE state is obtained by adding up the other indices: 4, 5, 6 and

1.

So the amplitudes for qubit 2 are

ZERO: $(a_0)^2 + (a_1)^2 + (a_2)^2 + (a_3)^2$ ONE: $(a_4)^2 + (a_5)^2 + (a_6)^2 + (a_7)^2$

Corresponding to the following indices:

ZERO: 0+0, 1+0, 2+0, 3+0 ONE: 4+0, 5+0, 6+0, 7+0

For qubit 1 the indices are:

ZERO: 0+0, 0+4, 1+0, 1+4 ONE: 2+0, 2+4, 3+0, 3+4

And for qubit 0 the indices are:

ZERO: 0+0, 0+2, 0+4, 0+6 ONE: 1+0, 1+2, 1+4, 1+6

The examples above are supposed to show the general pattern. For N qubits, qubit number k , the ZERO and ONE states are given by summing all the square amplitudes corresponding to the following indices:

ZERO: $n + (2^{(k+1)} * j)$, where $n = 0, 1, \dots, 2^k - 1$ and $j = 0, 1, \dots, 2^{(N-k-2)}$

ONE: $n + (2^{(k+1)} * j)$, where $n = 2^k, 2^k + 1, \dots, 2^{(k+1)} - 1$ and $j = 0, 1, \dots, 2^{(N-k-2)}$

The amplitudes are obtained by summing over both n and j . Notice that there is an edge condition when $k = N-1$. There, j apparently ranges from 0 to -1. In this case, the only value of j is 0. The condition arises because of the way that $2^{(N-k-2)}$ is obtained (i.e. such that multiplying it by $2^{(k+1)}$ gives $2^{(N-1)}$.) However, if $k = N-1$, then $2^{(k+1)} = 2^N$ already, so it must be multiplied by $2^{(-1)}$. The key point is that the second term should not ever equal 2^N , so j should stop at 0.

The above indices can be expressed as the sum of a ROOT and a STEP as follows:

index = ROOT + STEP

where ROOT ranges from 0 to $2^k - 1$. This corresponds to the n values that give rise to ZERO. The indices for ONE can be obtained by adding 2^k to root. The STEP = j is a multiple of $2^{(k+1)}$ starting from zero that does not equal or exceed 2^N . ROOT can be realised using the following for loop:

```
for(int root = 0; root < 2^k; root++) { ... // ZERO index root; // ONE index root + 2^k; }
```

Then the STEP component can be realised as

```
for(int step = 0; step < 2^N; step += 2^(k+1)) { // Add the following to root... step; } Loop over all qubits k = 0, 1, 2, ... N-1
```

ROOT loop: starts at 0, increases in steps of 1

STEP loop: starts at 0, increases in steps of $2^{(k+1)}$

Zeros are at the index root + step

Ones are at the index root + 2^k + step

update leds for each qubits average zero and one amps

5.7.3.9 remove_zero_amp_states()

```
int remove_zero_amp_states (
    Complex state[],
    int num_qubits,
    int disp_state[] )
```

takes state vector, number of qubits and vector to write the nonzero elements of the statevector to.

updates disp_state where the first 'return value of the function' elements are the nonzero elements of the state vector 'state'

the disp_state elements are the nonzero elements of the state

```
/// e.g. state = (00) = (1/r2) (Bell state)
///              (01)  ( 0 )
///              (10)  ( 0 )
///              (11)  (1/r2)
/// Then displ_state would have 2 elements
/// disp_state = (0) standing for (00)
///              (3)              (11)
///
```

Note

we have to allocate disp_state to be the size of state, the function returns count which tells us the first 'count' elements of disp_state to use. In the Bell state example there are 2 values in disp_state, 0 & 3, count is returned as 3 which means take the first count-1 elements (in this case 2) of disp_state which is 0,1 which is the correct elements

5.7.3.10 single_qubit_op()

```
void single_qubit_op (
    Complex op[2][2],
    int k,
    Complex state[],
    int N )
```

apply operator

Parameters

<i>state</i>	state vector containing amplitudes
<i>qubit</i>	qubit number to apply 2x2 matrix to
<i>N</i>	total number of qubits in the state
<i>op</i>	2x2 operator to be applied

This routine applies a single qubit gate to the state vector

Parameters

<i>state.</i>	Consider the three qubit case, with amplitudes shown in the table below:
---------------	--

```
*      index      binary      amplitude
*      -----
*      0          0 0 0        a0
*      1          0 0 1        a1
*      2          0 1 0        a2
*      3          0 1 1        a3
*      4          1 0 0        a4
*      5          1 0 1        a5
*      6          1 1 0        a6
*      7          1 1 1        a7
*      -----
*      Qubit:      2 1 0
*
```

If a single qubit operation is applied to qubit 2, then the 2x2 matrix must be applied to all pairs of (0,1) in the first column, with the numbers in the other columns fixed. In other words, the following indices are paired:

```
(0+0) (1+0) (2+0) (3+0)
(4+0) (5+0) (6+0) (7+0)
```

where the top line corresponds to the ZERO amplitude and the bottom row corresponds to the ONE amplitude.

Similarly, for qubit 1 the pairings are:

```
(0+0) (0+4) (1+0) (1+4)
(2+0) (2+4) (3+0) (3+4)
```

And for qubit 0 the pairings are:

```
(0+0) (0+2) (0+4) (0+6)
(1+0) (1+2) (1+4) (1+6)
```

These numbers are exactly the same as the previous function, which means the same nested loops can be used to perform operation. Now the index

```
root + step
```

refers to the ZERO amplitude (the first element in the column vector to be multiplied by the 2x2 matrix), and the index `Complex state[], int N root + 2^k + step`

corresponds to the ONE entry. ROOT loop: starts at 0, increases in steps of 1

STEP loop: starts at 0, increases in steps of $2^k(k+1)$

First index is ZERO, second index is ONE

5.7.3.11 `sort_states()`

```
int sort_states (
    Complex state[],
    int num_qubits )
```

Todo this function...

5.7.3.12 `zero_state()`

```
void zero_state (
    Complex state[],
    int Qnum )
```

Initialise state to the vacuum (zero apart from the first position) Specify the dimension – of the matrix, i.e.

$2^{\text{(number of qubits)}}$

Note


oh the clarity!

5.8 dspic33e/qcomp-sim-c.X/quantum.h File Reference


Description: Header file containing all the matrix arithmetic for simulating a single qubit.

```
#include "p33EP512MU810.h"
#include "xc.h"
#include <math.h>
#include <stdbool.h>
```

Include dependency graph for quantum.h:

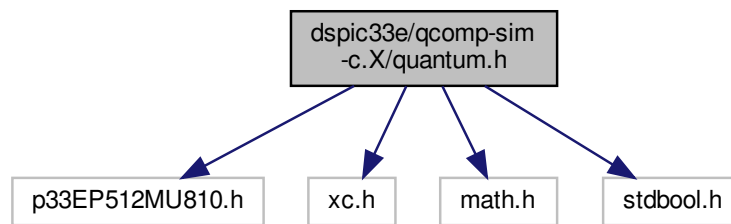

This graph shows which files directly or indirectly include this file:

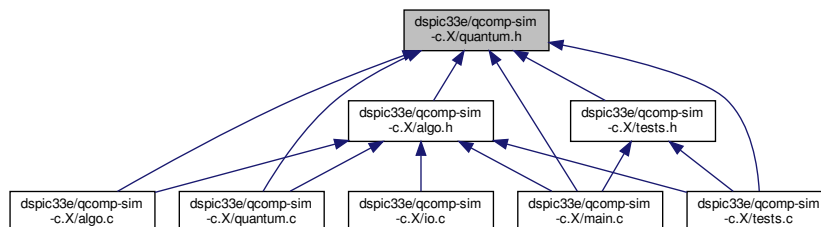

Macros

- `#define ONE_Q15 0.9999694824`

Typedefs

- `typedef signed _Fract Q15`
Basic fractional time.
- `typedef Q15 Complex[2]`
Complex type.

Enumerations

- enum `State` {
ZERO, ONE, PLUS, MINUS,
iPLUS, iMINUS }

Basis states.

Functions

- void `make_ops` (`Complex` X[2][2], `Complex` Y[2][2], `Complex` Z[2][2], `Complex` H[2][2])
Create complex X, Y, Z and H.
- void `zero_state` (`Complex` state[], int Qnum)
Initialise state to the vacuum (zero apart from the first position) Specify the dimension – of the matrix, i.e.
- void `mat_mul` (`Complex` M[2][2], `Complex` V[], int i, int j)
2x2 complex matrix multiplication
- void `mat_mul_4` (`Complex` M[4][4], `Complex` V[], int i, int j, int k, int l)
4x4 complex matrix multiplication
- void `single_qubit_op` (`Complex` op[2][2], int qubit, `Complex` state[], int Qnum)
apply operator
- void `controlled_qubit_op` (`Complex` op[2][2], int ctrl, int targ, `Complex` state[], int N)
apply controlled 2x2 op
- void `qubit_display` (`Complex` state[], int Qnum)
Display the state amplitudes on LEDs.
- int `sort_states` (`Complex` state[], int num_qubits)
- int `val_of_pos_bit` (int input, int pos)
- int `remove_zero_amp_states` (`Complex` state[], int num_qubits, int disp_state[])
updates disp_state where the first 'return value of the function' elements are the nonzero elements of the state vector 'state'

5.8.1 Detailed Description

Description: Header file containing all the matrix arithmetic for simulating a single qubit.

5.8.2 Function Documentation

5.8.2.1 `controlled_qubit_op()`

```
void controlled_qubit_op (
    Complex op[2][2],
    int ctrl,
    int targ,
    Complex state[],
    int N )
```

apply controlled 2x2 op

Parameters

<i>op</i>	single qubit unitary 2x2
<i>ctrl</i>	control qubit number (0,1,...,n-1)
<i>targ</i>	target qubit number (0,1,...,n-1)
<i>state</i>	complex state vector
<i>N</i>	total number of qubits

apply controlled 2x2 op

```
///      00 01 10 11
/// 00( 1  0  0  0  )
/// 01( 0  1  0  0  )
/// 10( 0  0  u00 u01 )
/// 11( 0  0  u10 u11 )
///
```

checks that the control qubit is $|1\rangle$ then does 2x2 unitary on remaining state vector ROOT loop: starts at 0, increases in steps of 1

STEP loop: starts at 0, increases in steps of 2^k (k+1)

First index is ZERO, second index is ONE

Note

for 2 qubit case check if the index in the ctrl qubit is a 1 then apply the 2x2 unitary else do nothing
sorry. this checks for the first element of the state vector i.e. the target qubits $|0\rangle$ and checks that the state vector element is one which the control qubit has a $|1\rangle$ state -> (root + step)

The second element of the state vector to take is then the first $+2^k$ (target qubit number). This also needs to be checked that the control qubit is in the $|1\rangle$.

Todo This expression can probably be simplified or broken over lines.

5.8.2.2 make_ops()

```
void make_ops (
    Complex X[2][2],
    Complex Y[2][2],
    Complex Z[2][2],
    Complex H[2][2] )
```

Create complex X, Y, Z and H.

Parameters

<i>X</i>	Pauli X c-Matrix
<i>Z</i>	Pauli Z c-matrix
<i>H</i>	Hadamard c-matrix
<i>Y</i>	Pauli Y c-matrix

Note

IMPLICIT NONE!!!

5.8.2.3 mat_mul()

```
void mat_mul (
    Complex M[2][2],
    Complex V[],
    int i,
    int j )
```

2x2 complex matrix multiplication

Parameters

<i>M</i>	complex matrix
<i>V</i>	complex vector
<i>i</i>	integer first element of state vector
<i>j</i>	integer second element of state vector

Todo Because of the way the array types work (you can't pass a multidimensional array of unknown size) we will also need a function for 4x4 matrix multiplication.

5.8.2.4 mat_mul_4()

```
void mat_mul_4 (
    Complex M[4][4],
    Complex V[],
    int i,
    int j,
    int k,
    int l )
```

4x4 complex matrix multiplication

Parameters

<i>M</i>	4x4 complex matrix
<i>V</i>	complex state vector
<i>i</i>	first element of V
<i>j</i>	second element of V
<i>k</i>	third element of V
<i>l</i>	Fourth element of V

Note

this function is never used as we realised that a 2-qubit gate is a reduced form of a single qubit gate...

Todo remove or make this general? It might not even be needed :(

4x4 complex matrix multiplication store results of each row multiplication

```
/// ( a b c d ) * ( p )
/// ( e f g h )   ( q )
/// ( h i j k )   ( r )
/// ( l m n o )   ( s )
///
```

4 cols of V (i,h,k,l)

add the 4 terms together and put into temp for that row

5.8.2.5 qubit_display()

```
void qubit_display (
    Complex state[],
    int N )
```

Display the state amplitudes on LEDs.

Parameters

<i>state</i>	Pass in the state vector
<i>Qnum</i>	The total number of qubits

Note

Currently the function only displays superpositions using the red and blue colors.

Todo rename to display_average

Parameters

<i>state</i>	Pass in the state vector
<i>N</i>	The total number of qubits

Note

Currently the function only displays superpositions using the red and blue colors.

The routine works by adding up the squares of the amplitudes corresponding to each state of a given qubit. Suppose there are three qubits. Then the state vector is given by

*	index	binary	amplitude
*	0	0 0 0	a0
*	1	0 0 1	a1
*	2	0 1 0	a2
*	3	0 1 1	a3
*	4	1 0 0	a4
*	5	1 0 1	a5
*	6	1 1 0	a6
*	7	1 1 1	a7
*	-----		
*	Qubit:	2 1 0	
*			

Consider qubit 2. The value of the ZERO state is formed by adding up all the amplitudes corresponding to its ZERO state. That is, indices 0, 1, 2 and 3. The ONE state is obtained by adding up the other indices: 4, 5, 6 and

1.

So the amplitudes for qubit 2 are

ZERO: $(a_0)^2 + (a_1)^2 + (a_2)^2 + (a_3)^2$ ONE: $(a_4)^2 + (a_5)^2 + (a_6)^2 + (a_7)^2$

Corresponding to the following indices:

ZERO: 0+0, 1+0, 2+0, 3+0 ONE: 4+0, 5+0, 6+0, 7+0

For qubit 1 the indices are:

ZERO: 0+0, 0+4, 1+0, 1+4 ONE: 2+0, 2+4, 3+0, 3+4

And for qubit 0 the indices are:

ZERO: 0+0, 0+2, 0+4, 0+6 ONE: 1+0, 1+2, 1+4, 1+6

The examples above are supposed to show the general pattern. For N qubits, qubit number k, the ZERO and ONE states are given by summing all the square amplitudes corresponding to the following indices:

ZERO: $n + (2^{(k+1)} * j)$, where $n = 0, 1, \dots, 2^k - 1$ and $j = 0, 1, \dots, 2^{(N-k-2)}$

ONE: $n + (2^{(k+1)} * j)$, where $n = 2^k, 2^k + 1, \dots, 2^{(k+1)} - 1$ and $j = 0, 1, \dots, 2^{(N-k-2)}$

The amplitudes are obtained by summing over both n and j. Notice that there is an edge condition when $k = N-1$. There, j acycle_lengthpparently ranges from 0 to -1. In this case, the only value of j is 0. The condition arises because of the way that $2^{(N-k-2)}$ is obtained (i.e. such that multiplying it by $2^{(k+1)}$ gives $2^{(N-1)}$.) However, if $k = N-1$, then $2^{(k+1)} = 2^N$ already, so it must be multiplied by $2^{(-1)}$. The key point is that the second term should not ever equal 2^N , so j should stop at 0.

The above indices can be expressed as the sum of a ROOT and a STEP as follows:

index = ROOT + STEP

where ROOT ranges from 0 to 2^k-1 . This corresponds to the n values that give rise to ZERO. The indices for ONE can be obtained by adding 2^k to root. The STEP = j is a multiple of $2^{(k+1)}$ starting from zero that does not equal or exceed 2^N . ROOT can be realised using the following for loop:

```
for(int root = 0; root < 2^k; root++) { ... // ZERO index root; // ONE index root + 2^k; }
```

Then the STEP component can be realised as

```
for(int step = 0; step < 2^N; step += 2^(k+1)) { // Add the following to root... step; } Loop over all qubits k = 0, 1, 2, ... N-1
```

ROOT loop: starts at 0, increases in steps of 1

STEP loop: starts at 0, increases in steps of $2^{(k+1)}$

Zeros are at the index root + step

Ones are at the index root + 2^k + step

update leds for each qubits average zero and one amps

5.8.2.6 remove_zero_amp_states()

```
int remove_zero_amp_states (
    Complex state[],
    int num_qubits,
    int disp_state[] )
```

updates disp_state where the first 'return value of the function' elements are the nonzero elements of the state vector 'state'

Parameters

<i>state</i>	complex state vector in
<i>num_qubits</i>	int number of qubits in
<i>disp_state</i>	complex inout vector where the first n entries are the nonzero elements of 'state'

Returns

returns the number of elements to look at in disp_state.

updates disp_state where the first 'return value of the function' elements are the nonzero elements of the state vector 'state'

the disp_state elements are the nonzero elements of the state

```
/// e.g. state = (00) = (1/r2) (Bell state)
///              (01)  ( 0 )
///              (10)  ( 0 )
///              (11)  (1/r2)
/// Then displ_state would have 2 elements
/// disp_state = (0) standing for (00)
///              (3)              (11)
///
```

Note

we have to allocate disp_state to be the size of state, the function returns count which tells us the first 'count' elements of disp_state to use. In the Bell state example there are 2 values in disp_state, 0 & 3, count is returned as 3 which means take the first count-1 elements (in this case 2) of disp_state which is 0,1 which is the correct elements

5.8.2.7 single_qubit_op()

```
void single_qubit_op (
    Complex op[2][2],
    int k,
    Complex state[],
    int N )
```

apply operator

Parameters

<i>state</i>	state vector containing amplitudes
<i>qubit</i>	qubit number to apply 2x2 matrix to
<i>Qnum</i>	total number of qubits in the state
<i>op</i>	2x2 operator to be applied
<i>state</i>	state vector containing amplitudes
<i>qubit</i>	qubit number to apply 2x2 matrix to
<i>N</i>	total number of qubits in the state
<i>op</i>	2x2 operator to be applied

This routine applies a single qubit gate to the state vector

Parameters

<i>state.</i>	Consider the three qubit case, with amplitudes shown in the table below:
---------------	--

```

*      index      binary      amplitude
*      -----
*      0          0 0 0        a0
*      1          0 0 1        a1
*      2          0 1 0        a2
*      3          0 1 1        a3
*      4          1 0 0        a4
*      5          1 0 1        a5
*      6          1 1 0        a6
*      7          1 1 1        a7
*      -----
*      Qubit:      2 1 0
*

```

If a single qubit operation is applied to qubit 2, then the 2x2 matrix must be applied to all pairs of (0,1) in the first column, with the numbers in the other columns fixed. In other words, the following indices are paired:

```

(0+0) (1+0) (2+0) (3+0)
(4+0) (5+0) (6+0) (7+0)

```

where the top line corresponds to the ZERO amplitude and the bottom row corresponds to the ONE amplitude.

Similarly, for qubit 1 the pairings are:

```

(0+0) (0+4) (1+0) (1+4)
(2+0) (2+4) (3+0) (3+4)

```

And for qubit 0 the pairings are:

```

(0+0) (0+2) (0+4) (0+6)
(1+0) (1+2) (1+4) (1+6)

```

These numbers are exactly the same as the previous function, which means the same nested loops can be used to perform operation. Now the index

```
root + step
```

refers to the ZERO amplitude (the first element in the column vector to be multiplied by the 2x2 matrix), and the index `Complex state[], int N root + 2^k + step`

corresponds to the ONE entry. ROOT loop: starts at 0, increases in steps of 1

STEP loop: starts at 0, increases in steps of $2^{(k+1)}$

First index is ZERO, second index is ONE

5.8.2.8 sort_states()

```
int sort_states (
    Complex state[],
    int num_qubits )
```

Todo this function...

5.8.2.9 zero_state()

```
void zero_state (
    Complex state[],
    int Qnum )
```

Initialise state to the vacuum (zero apart from the first position) Specify the dimension – of the matrix, i.e.

$2^{\text{(number of qubits)}}$

Parameters

<i>state</i>	complex state vector
<i>Qnum</i>	int total number of qubits

$2^{\text{(number of qubits)}}$

Note


oh the clarity!

5.9 dspic33e/qcomp-sim-c.X/spi.c File Reference

Description: Functions for communicating with serial devices.

```
#include "spi.h"
```

Include dependency graph for spi.c:

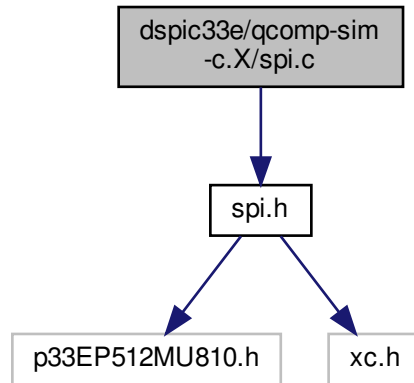

Functions

- int [setup_spi](#) (void)
Set up serial peripheral interface.
- int [send_byte_spi_1](#) (int data)
Send a byte to the SPI1 peripheral.
- int [read_byte_spi_3](#) ()
Recieve a byte from the SPI3 peripheral.

5.9.1 Detailed Description

Description: Functions for communicating with serial devices.

5.9.2 Function Documentation

5.9.2.1 send_byte_spi_1()

```
int send_byte_spi_1 (
    int data )
```

Send a byte to the SPI1 peripheral.

Parameters

<i>data</i>	byte to be sent to SPI1
-------------	-------------------------

5.9.2.2 setup_spi()

```
int setup_spi (
    void )
```

Set up serial peripheral interface.

Pin mappings — Pin mappings and codes —

J10:41 = J1:91 = uC:70 = RPI74 (PPS code: 0100 1010)
 J10:44 = J1:93 = uC:9 = RPI52 (PPS code: 0011 0100)
 J10:47 = J1:101 = uC:34 = RPI42 (PPS code: 0010 1010)
 J10:43 = J1:95 = uC:72 = RP64 (PPS reg: RPOR0_L; code: 0100 0000)
 J10:46 = J1:97 = uC:69 = RPI73 (PPS code: 0100 1001)
 J10:7 = J1:13 = uC:3 = RP85 (PPS reg: RPOR6_L; code: 0101 0101)
 J10:5 = J1:7 = uC:5 = RP87 (PPS reg: RPOR6_H)
 J10:55 = J1:117 = uC:10 = RP118 (PPS reg: RPOR13_H)

— Pin mappings for SPI 1 module —

SPI 1 Clock Out (SCK1) PPS code: 000110 (0x06)
 SPI 1 Data Out (SDO1) PPS code: 000101 (0x05)
 SPI 1 Slave Select PPS code: 000111

— Pin mappings for SPI 3 module —

SPI 3 Clock Out (SCK3) PPS code: 100000 (0x20)
 SPI 3 Data Out (SDO3) PPS code: 011111 (0x1F)
 SPI 3 Slave Select PPS code: 100001

Configure the SPI 1 pins

< Put SCK1 on J10:43

< Put SDO1 on J10:55

The clock pin also needs to be configured as an input

< Set SCK1 on J10:43 as input

Configure the SPI 3 output pins

< Put SCK3 on J10:7

< Put SDO3 on J10:5

< Put SDI3 on J10:44

< Set SCK3 on J10:7 as input

@note

SPI 1 clock configuration

$SCK1 = F_CY / (\text{Primary Prescaler} * \text{Secondary Prescaler})$


Assuming that $F_CY = 50\text{MHz}$, and the prescalers are 4 and 1, the SPI clock frequency will be 12.5MHz.

5.10 dspic33e/qcomp-sim-c.X/spi.h File Reference


Description: SPI communication functions.

```
#include "p33EP512MU810.h"
#include "xc.h"
```

Include dependency graph for spi.h:

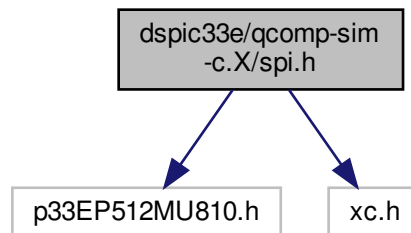

This graph shows which files directly or indirectly include this file:

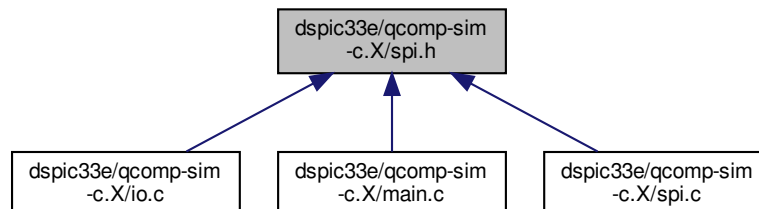

Functions

- int [setup_spi](#) (void)
Set up serial peripheral interface.
- int [send_byte_spi_1](#) (int data)
Send a byte to the SPI1 peripheral.
- int [read_byte_spi_3](#) ()
Recieve a byte from the SPI3 peripheral.

5.10.1 Detailed Description

Description: SPI communication functions.

5.10.2 Function Documentation

5.10.2.1 send_byte_spi_1()

```
int send_byte_spi_1 (
    int data )
```

Send a byte to the SPI1 peripheral.

Parameters

<i>data</i>	byte to be sent to SPI1
-------------	-------------------------

5.10.2.2 setup_spi()

```
int setup_spi (
    void )
```

Set up serial peripheral interface.

Pin mappings — Pin mappings and codes —

J10:41 = J1:91 = uC:70 = RPI74 (PPS code: 0100 1010)
 J10:44 = J1:93 = uC:9 = RPI52 (PPS code: 0011 0100)
 J10:47 = J1:101 = uC:34 = RPI42 (PPS code: 0010 1010)
 J10:43 = J1:95 = uC:72 = RP64 (PPS reg: RPOR0_L; code: 0100 0000)
 J10:46 = J1:97 = uC:69 = RPI73 (PPS code: 0100 1001)
 J10:7 = J1:13 = uC:3 = RP85 (PPS reg: RPOR6_L; code: 0101 0101)
 J10:5 = J1:7 = uC:5 = RP87 (PPS reg: RPOR6_H)
 J10:55 = J1:117 = uC:10 = RP118 (PPS reg: RPOR13_H)

— Pin mappings for SPI 1 module —

SPI 1 Clock Out (SCK1) PPS code: 000110 (0x06)
 SPI 1 Data Out (SDO1) PPS code: 000101 (0x05)
 SPI 1 Slave Select PPS code: 000111

— Pin mappings for SPI 3 module —

SPI 3 Clock Out (SCK3) PPS code: 100000 (0x20)
 SPI 3 Data Out (SDO3) PPS code: 011111 (0x1F)
 SPI 3 Slave Select PPS code: 100001

Configure the SPI 1 pins

< Put SCK1 on J10:43

< Put SDO1 on J10:55

The clock pin also needs to be configured as an input

< Set SCK1 on J10:43 as input

Configure the SPI 3 output pins

< Put SCK3 on J10:7

< Put SDO3 on J10:5

< Put SDI3 on J10:44

< Set SCK3 on J10:7 as input

@note

SPI 1 clock configuration


$SCK1 = F_{CY} / (\text{Primary Prescaler} * \text{Secondary Prescaler})$

Assuming that $F_{CY} = 50\text{MHz}$, and the prescalers are 4 and 1, the SPI clock frequency will be 12.5MHz.

5.11 dspic33e/qcomp-sim-c.X/tests.c File Reference

Description: Contains all the tests we have performed on the micro- controller.

```
#include "tests.h"
#include "io.h"
#include "quantum.h"
#include "time.h"
#include "algo.h"
Include dependency graph for tests.c:
```

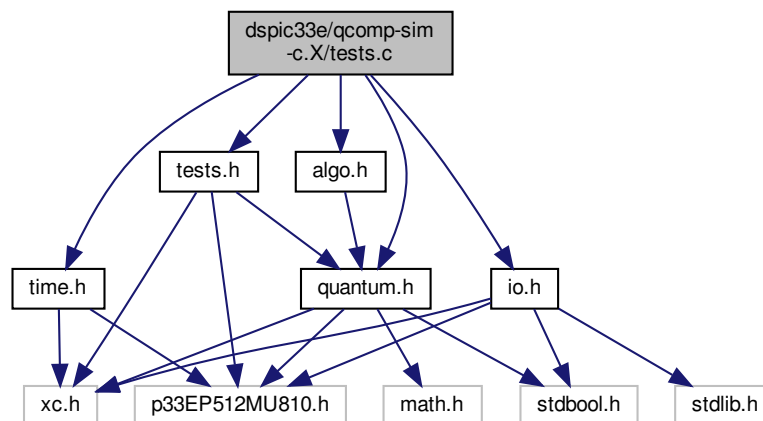

Functions

- void `swap_test` (`Complex` state[])
swap test nice visuals
- void `dim_leds` ()
Testing the speed of 2^{15} 2x2 real matrix multiplications void mat_mul_test() {.

5.11.1 Detailed Description

Description: Contains all the tests we have performed on the micro- controller.

5.11.2 Function Documentation

5.11.2.1 dim_leds()

```
void dim_leds ( )
```

Testing the speed of 2^{15} 2x2 real matrix multiplications void mat_mul_test() {.

Define state vector $|0\rangle = (1,0)$ $|1\rangle = (0,1)$ Vector V; init_state(V, ZERO);

Matrix2 X = {{0}}, Z = {{0}}, H = {{0}}; make_ops(X, Z, H);

Start the timer start_timer();

Do a matrix multiplication test unsigned int n = 0; while (n < 32768) { mat_mul(X, V); n++; }

Read the timer unsigned long int time = read_timer();

Show that the test is finished set_led(red, on);

wait (add a breakpoint here) while(1 == 1);

```
}
```

5.11.2.2 swap_test()

```
void swap_test (
    Complex state[] )
```

swap test nice visuals


swap for ever!

5.12 dspic33e/qcomp-sim-c.X/tests.h File Reference


Description: Header file containing all the tests we performed.

```
#include "p33EP512MU810.h"
#include "xc.h"
#include "quantum.h"
```

Include dependency graph for tests.h:

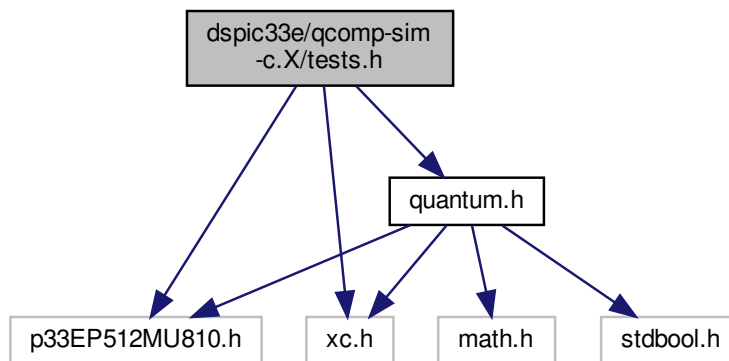

This graph shows which files directly or indirectly include this file:

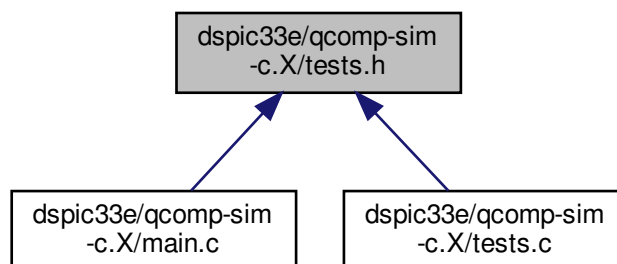

Functions

- void `mat_mul_test` ()
- void `mat_mul_test_cmplx` ()
- void `one_qubit` ()
- void `one_qubit_cmplx` ()
- void `dim_leds` ()

- Testing the speed of 2^{15} 2x2 real matrix multiplications void mat_mul_test() {.*
- void **multi_led_strobe** ()
 - void **delay** ()
delays for 100,000
 - void **swap_test** (Complex state[])
swap test nice visuals

5.12.1 Detailed Description

Description: Header file containing all the tests we performed.

5.12.2 Function Documentation

5.12.2.1 delay()

```
void delay ( )
```

delays for 100,000

delays for 100,000

5.12.2.2 dim_leds()

```
void dim_leds ( )
```

Testing the speed of 2^{15} 2x2 real matrix multiplications void mat_mul_test() {.

Define state vector $|0\rangle = (1,0)$ $|1\rangle = (0,1)$ Vector V; init_state(V, ZERO);

Matrix2 X = {{0}}, Z = {{0}}, H = {{0}}; make_ops(X, Z, H);

Start the timer start_timer();

Do a matrix multiplication test unsigned int n = 0; while (n < 32768) { mat_mul(X, V); n++; }

Read the timer unsigned long int time = read_timer();

Show that the test is finished set_led(red, on);

wait (add a breakpoint here) while(1 == 1);

```
}
```

5.12.2.3 swap_test()

```
void swap_test (
    Complex state[] )
```

swap test nice visuals


swap for ever!

5.13 dspic33e/qcomp-sim-c.X/time.c File Reference

Description: Functions to control the on chip timers.

```
#include "time.h"
```

Include dependency graph for time.c:

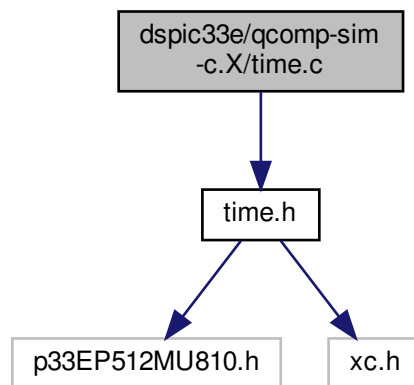

Functions

- void **setup_clock** ()
- void **setup_timer** ()
- void **reset_timer** ()
- void **start_timer** ()
- void **stop_timer** ()
- unsigned long int **read_timer** ()
- void **delay** ()

Delay function!

5.13.1 Detailed Description

Description: Functions to control the on chip timers.

5.13.2 Function Documentation

5.13.2.1 delay()

```
void delay ( )
```

Delay function!

delays for 100,000

5.13.2.2 setup_timer()

```
void setup_timer ( )
```

Todo distinguish between the two different timers here...


5.14 dspic33e/qcomp-sim-c.X/time.h File Reference

Description: Header file containing all the timing functions.


```
#include "p33EP512MU810.h"
```

```
#include "xc.h"
```

Include dependency graph for time.h:

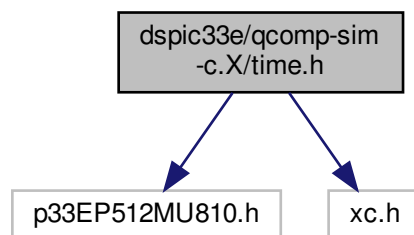

This graph shows which files directly or indirectly include this file:

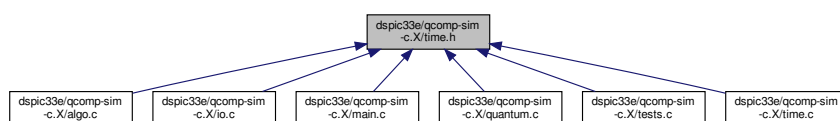

Functions

- void **setup_clock** ()
- void **setup_timer** ()
- void **reset_timer** ()
- void **start_timer** ()
- void **stop_timer** ()
- unsigned long int **read_timer** ()
- void **delay** ()

Delay function!

5.14.1 Detailed Description

Description: Header file containing all the timing functions.

5.14.2 Function Documentation

5.14.2.1 delay()

```
void delay ( )
```

Delay function!

delays for 100,000

5.14.2.2 setup_timer()

```
void setup_timer ( )
```

Todo distinguish between the two different timers here...

Index

__attribute__
io.c, 17

absolute
quantum.c, 37

add_to_cycle
io.c, 18
io.h, 28

algo.c
gate, 12
two_gate, 12

algo.h
gate, 14
two_gate, 14

BTN_CHIP_NUM
io.c, 17

buttons
io.c, 24

controlled_qubit_op
quantum.c, 38
quantum.h, 46
cycle_node, 7

delay
tests.h, 61
time.c, 63
time.h, 64

dim_leds
tests.c, 59
tests.h, 61

display_cycle
quantum.c, 38

dspic33e/qcomp-sim-c.X/algo.c, 11
dspic33e/qcomp-sim-c.X/algo.h, 12
dspic33e/qcomp-sim-c.X/config.h, 14
dspic33e/qcomp-sim-c.X/io.c, 15
dspic33e/qcomp-sim-c.X/io.h, 25
dspic33e/qcomp-sim-c.X/main.c, 34
dspic33e/qcomp-sim-c.X/quantum.c, 36
dspic33e/qcomp-sim-c.X/quantum.h, 45
dspic33e/qcomp-sim-c.X/spi.c, 53
dspic33e/qcomp-sim-c.X/spi.h, 56
dspic33e/qcomp-sim-c.X/tests.c, 58
dspic33e/qcomp-sim-c.X/tests.h, 60
dspic33e/qcomp-sim-c.X/time.c, 62
dspic33e/qcomp-sim-c.X/time.h, 63

flash_all
io.c, 18

io.h, 28
flash_led
io.c, 19
io.h, 28

gate
algo.c, 12
algo.h, 14

io.c
__attribute__, 17
add_to_cycle, 18
BTN_CHIP_NUM, 17
buttons, 24
flash_all, 18
flash_led, 19
isr_counter, 25
led_color_int, 19
led_cycle_test, 19
led_global, 25
read_btn, 20
read_external_buttons, 20
reset_cycle, 20
set_external_led, 21
set_led, 21
set_strobe, 22
setup_external_leds, 22
setup_io, 22
TLC591x_mode_switch, 22
toggle_strobe, 23
update_display_buffer, 23
write_display_driver, 24

io.h
add_to_cycle, 28
flash_all, 28
flash_led, 28
led_color_int, 29
led_cycle_test, 29
read_btn, 29
read_external_buttons, 30
reset_cycle, 30
set_external_led, 30
set_led, 31
set_strobe, 31
setup_external_leds, 32
setup_io, 32
toggle_strobe, 32
update_display_buffer, 32
write_display_driver, 33
isr_counter

- io.c, 25
- LED_GLOBAL, 8
- LED, 8
- led_color_int
 - io.c, 19
 - io.h, 29
- led_cycle_test
 - io.c, 19
 - io.h, 29
- led_global
 - io.c, 25
- main
 - main.c, 35
- main.c
 - main, 35
- make_ops
 - quantum.c, 39
 - quantum.h, 47
- make_ops_4
 - quantum.c, 39
- mat_mul
 - quantum.c, 40
 - quantum.h, 48
- mat_mul_4
 - quantum.c, 40
 - quantum.h, 48
- NUM_MAX_AMPS
 - quantum.c, 37
- quantum.c
 - absolute, 37
 - controlled_qubit_op, 38
 - display_cycle, 38
 - make_ops, 39
 - make_ops_4, 39
 - mat_mul, 40
 - mat_mul_4, 40
 - NUM_MAX_AMPS, 37
 - qubit_display, 40
 - remove_zero_amp_states, 42
 - single_qubit_op, 42
 - sort_states, 44
 - zero_state, 44
- quantum.h
 - controlled_qubit_op, 46
 - make_ops, 47
 - mat_mul, 48
 - mat_mul_4, 48
 - qubit_display, 49
 - remove_zero_amp_states, 50
 - single_qubit_op, 51
 - sort_states, 52
 - zero_state, 53
- qubit_display
 - quantum.c, 40
 - quantum.h, 49
- RGB, 9
- read_btn
 - io.c, 20
 - io.h, 29
- read_external_buttons
 - io.c, 20
 - io.h, 30
- remove_zero_amp_states
 - quantum.c, 42
 - quantum.h, 50
- reset_cycle
 - io.c, 20
 - io.h, 30
- send_byte_spi_1
 - spi.c, 54
 - spi.h, 57
- set_external_led
 - io.c, 21
 - io.h, 30
- set_led
 - io.c, 21
 - io.h, 31
- set_strobe
 - io.c, 22
 - io.h, 31
- setup_external_leds
 - io.c, 22
 - io.h, 32
- setup_io
 - io.c, 22
 - io.h, 32
- setup_spi
 - spi.c, 55
 - spi.h, 57
- setup_timer
 - time.c, 63
 - time.h, 64
- single_qubit_op
 - quantum.c, 42
 - quantum.h, 51
- sort_states
 - quantum.c, 44
 - quantum.h, 52
- spi.c
 - send_byte_spi_1, 54
 - setup_spi, 55
- spi.h
 - send_byte_spi_1, 57
 - setup_spi, 57
- swap_test
 - tests.c, 59
 - tests.h, 61
- TLC591x_mode_switch
 - io.c, 22
- tests.c
 - dim_leds, 59
 - swap_test, 59

- tests.h
 - delay, [61](#)
 - dim_leds, [61](#)
 - swap_test, [61](#)
- time.c
 - delay, [63](#)
 - setup_timer, [63](#)
- time.h
 - delay, [64](#)
 - setup_timer, [64](#)
- toggle_strobe
 - io.c, [23](#)
 - io.h, [32](#)
- two_gate
 - algo.c, [12](#)
 - algo.h, [14](#)
- update_display_buffer
 - io.c, [23](#)
 - io.h, [32](#)
- write_display_driver
 - io.c, [24](#)
 - io.h, [33](#)
- zero_state
 - quantum.c, [44](#)
 - quantum.h, [53](#)