

# Modelling Challenge: Fluids on membranes

Oliver Bond, Meredith Ellis, Nicolas Bouellé, Huining Yang October 10, 2018

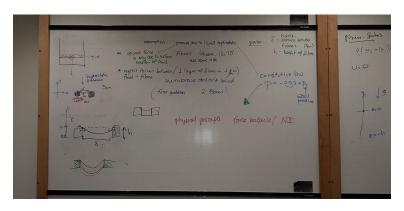

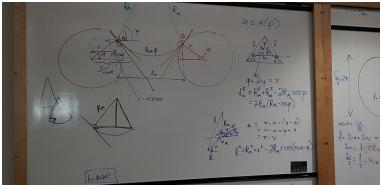

## Assumptions

- The **pressure** due to the liquid is *hydrostatic* (so there is **no fluid flow**)
- The upward force is only due to the surface tension of fluid
- All the fibres are square in cross-section and of the same size
- There is only one layer of fibres and these are in 1 dimension
- The membrane does not bend
- The pressure is constant over the widthscale of the fibre
- $\bullet\,$  The flow is incompressible and irrotational

## Physical law

We consider **Newton's Second Law**, in other words, balancing forces.

At each point on the surface, pressure balance results in (at each point on the interface)

$$\rho gh = \kappa \gamma$$

where  $\rho$  is the density of water,  $\kappa$  is the curvature of the interface,  $\gamma$  is a constant, and h = h(x) is the vertical distance of the meniuscus at point x from the bottom edge of one of the fibres. In particular (from page 13 of the Topics in Fluids notes),  $\kappa$  is the curvature of the meniscus, given by

$$\kappa = \frac{h_{xx}}{\left(1 + h_x^2\right)^{\frac{3}{2}}}.$$

However, in the simplest possible case we can assume that this is a constant, that is, that the meniuscus is a circular arc. So we can use  $\kappa = \frac{1}{R_M}$  where  $R_M$  is the radius of this circular arc. All that remains is to find  $R_M$  in terms of the other parameters, which can be done using trigonometry.

#### Variables

•  $\alpha$  is the angle (in *radians*) between each point of contact of the meniscus and fibre, and the horizontal axis pointing towards the middle of the two fibres. If these are different for each of the fibres, we shall call these  $\alpha_1$  and  $\alpha_2$ .

### **Parameters**

- $R_M$  is the (signed) radius of curvature of the meniuscus (in *metres*) when it is in its steady state. If  $R_M > 0$  then the meniscus is  $\cup$ -shaped; if  $R_M < 0$  then the meniscus is  $\cap$ -shaped.
- $d_w$  is the distance between the fibres (in metres)
- R is the radius of each of the fibres (in *metres*). If the radii of the two fibres are different, we shall call these  $r_1$  and  $r_2$ .
- $\theta$  is the angle of contact (in *radians*) between the meniscus and the fibre (i.e. if there is a point where the meniscus touches the fibre, this is the angle between the tangent to the circle at that point, and the tangent of the meniscus at that point).
- $\ell$  is the distance (in *metres*) between the centres of two fibres.

#### Constitutive law

We want to find the steady state of the membrane. To start with we assume that this is a circular arc, i.e.  $R_M$ .

### Solution

We can use trigonometry to derive the formula

$$R_M = \frac{\frac{\ell}{2} - R\cos\alpha}{-\cos(\alpha - \theta)}.$$

This specifies the function  $R_M$  in terms of  $\alpha$ .

There is a value of  $\alpha$ , which we will call  $\alpha_{\rm crit}$ , for which the curvature changes sign (so the meniscus changes from being  $\cap$ -shaped to  $\cup$ -shaped). In between these cases, the meniscus is completely flat, which happens as  $|R_M| \to \infty$ . This happens when  $\cos(\alpha - \theta) = 0$ , i.e. when  $\alpha - \theta = \frac{\pi}{2}$ 

$$\alpha_{\rm crit} = \frac{\pi}{2} + \theta.$$