

Addressable LED STRIP

Precautions:

1. Please use the correct power supply according to your LED strip.

If your LED strip is 5V, please do not use a power supply higher than 5V. Otherwise, the LED strip will be burned.

2. This product requires an anti-corrosion environment. For example, avoid moisture, dripping, or other adverse factors.

3. The voltage drop will affect the actual power of the 16.4FT RGB LED strip.

4. The LEDs at the far end of the strip might be dimmer because of the added resistance and voltage drop that occurs as the current flows to that end of the LED strip.

This is a normal physical phenomenon, and all the LED strips cannot avoid this problem.

The factors that affect brightness are:

① Length.

If your project is too long, the voltage drops.

② Power supply.

Make sure the power is enough for the project.

③ Lighting effect.

The full brightness mixed white light will consume a lot of energy. RGB LED strip White light is mixed white light = Red + green + blue light.

④ Brightness.

The brighter the brightness, the more consumption.

Solution:

① Adding voltage every 5 meters (16.4ft).

② Lower brightness

③ Enough power

④ Avoid the full white lighting effect.

⑤ Refer to user manual Series Connection & Voltage Supplementation

⑥ etc

Common issues:

1. Why the led strip only work the part of Leds?

-Please Check Your LED Controller setting Problem, lots of led controller has Maximum Control the number of leds; Such as the Pixels LED Controller The factory setting is 150IC, that time your 5M WS2812B 60leds/m LED Strip Will has Half of leds Will not Light Up.

2. Why the led strip Can't Work?

-Let the LED Strip Work We must Meet two conditions: Use the Right Voltage LED Power Supply And Correctly Program Pixels LED Controller. If still can't work, Please check your Data direction Whether input Wrong.


3. Why the led strip work but different Colors?

-Please set your led controller choose the Right Program match to your LED Strip, If your led strip is WS2812B RGB please Choose WS2812B Program; if your led strip is SK6812-RGBW Please Choose SK6812-RGBW Program.


4. Why i Choose Red but the led strip Show Green Color, Choose Green Color LED Strip Show Red Color?

-First The LED Strip factory settings is RGB. But LED Controller maybe factory settings is GRB, So When you choose Green the led strip Show Red Colors. lots led controller can setting the R/G/B Sequence Again.


Installation Notes

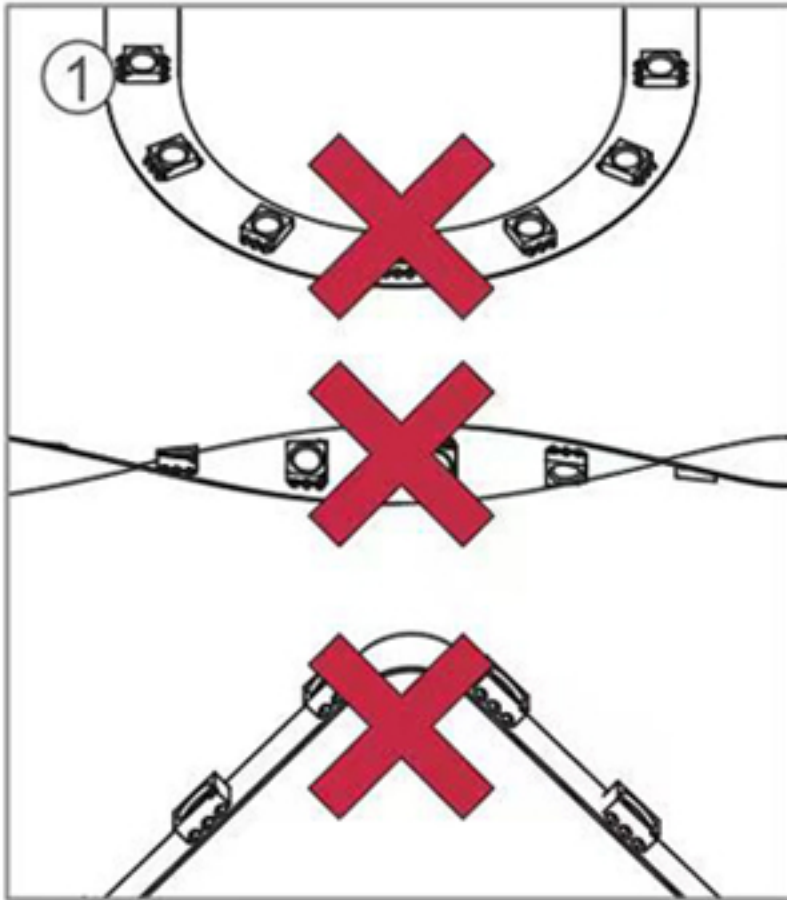


Do not bend, fold or crease the LED strip/tape in a horizontal direction.

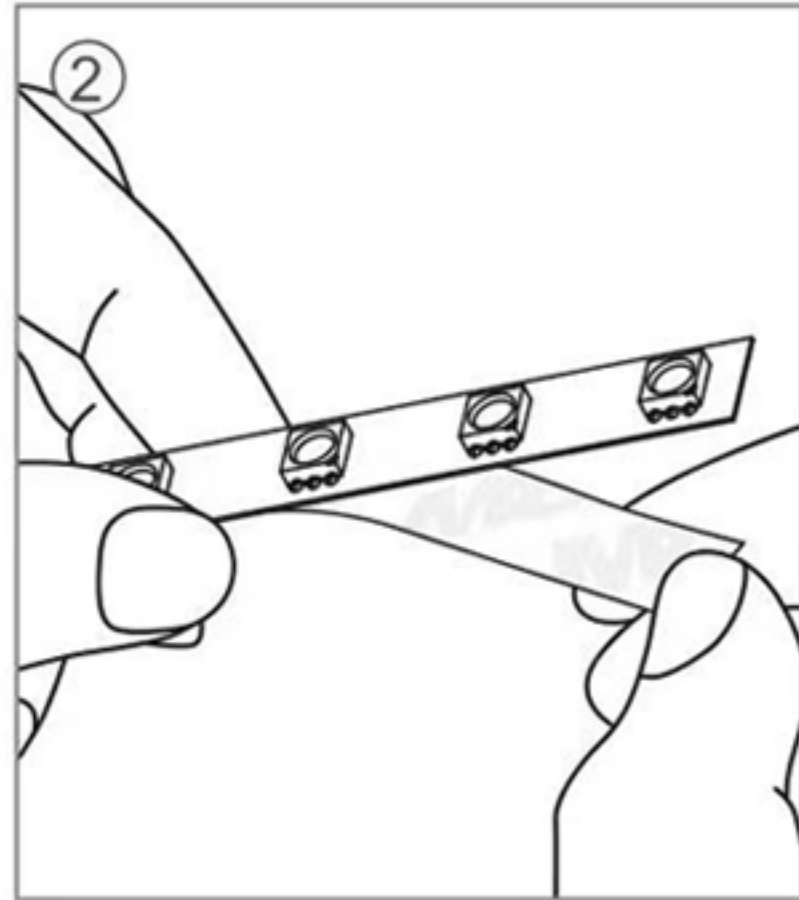



Please peel off the tape gently, otherwise it may tear due to over-stretching.

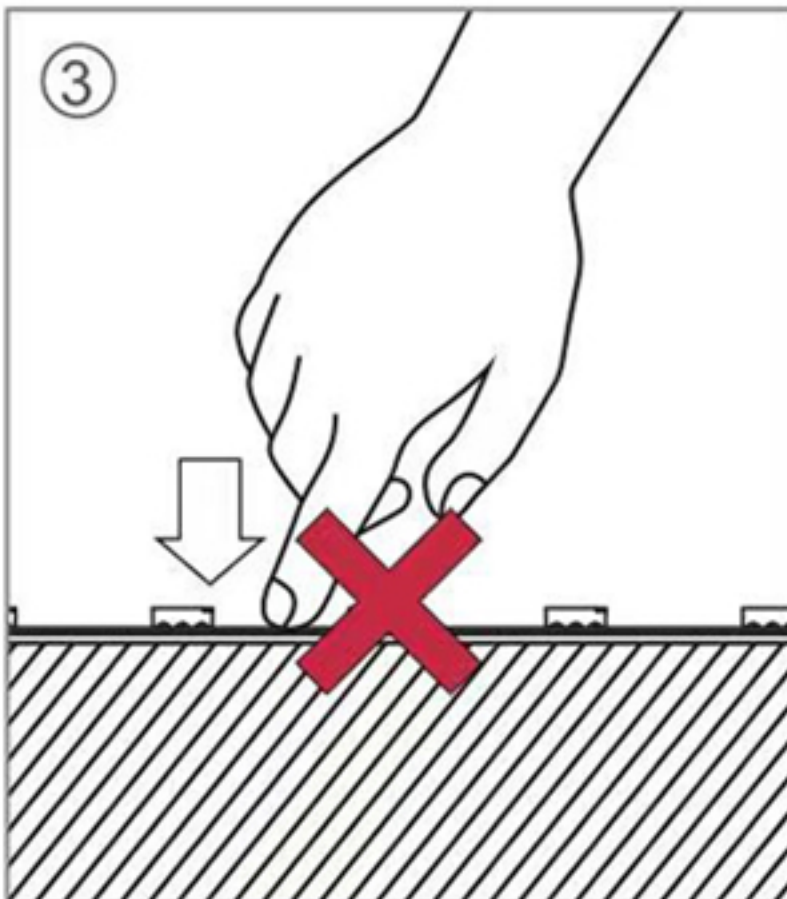

Please take proper anti-static measures, gently press the PCB board, not the LEDS surface, otherwise it may cause chemical reaction as time goes by.

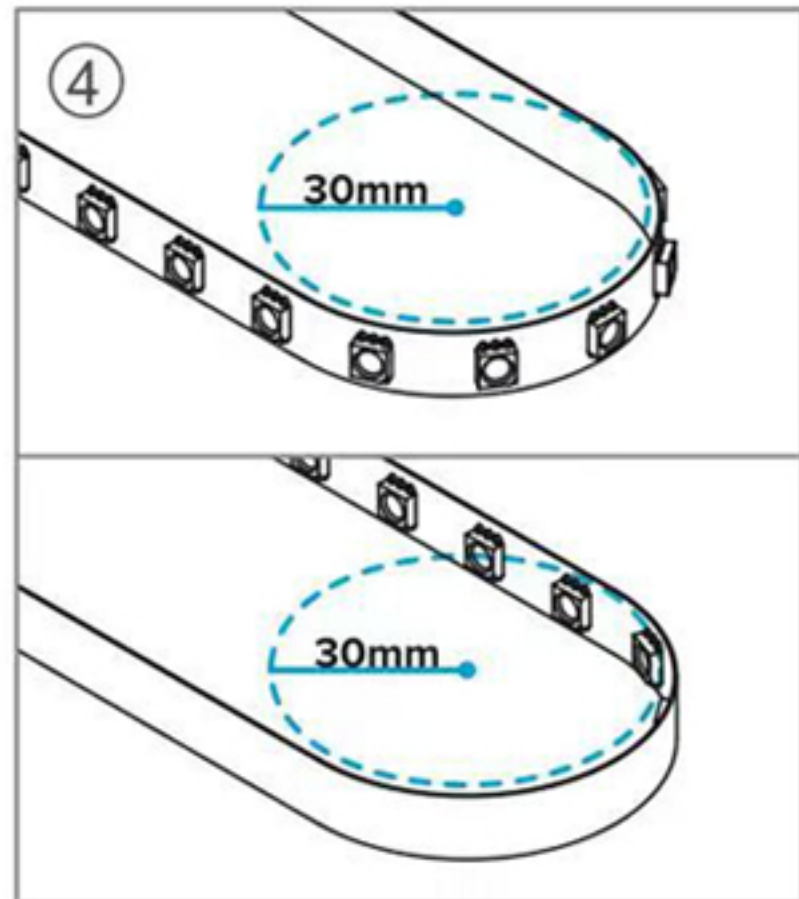

Do not over bend the LED strip to make the circuit break even the strip works fine after over-bending the hot and cold contrast may cause PCB board disfunction either
Bending radius>30mm(1.2in)

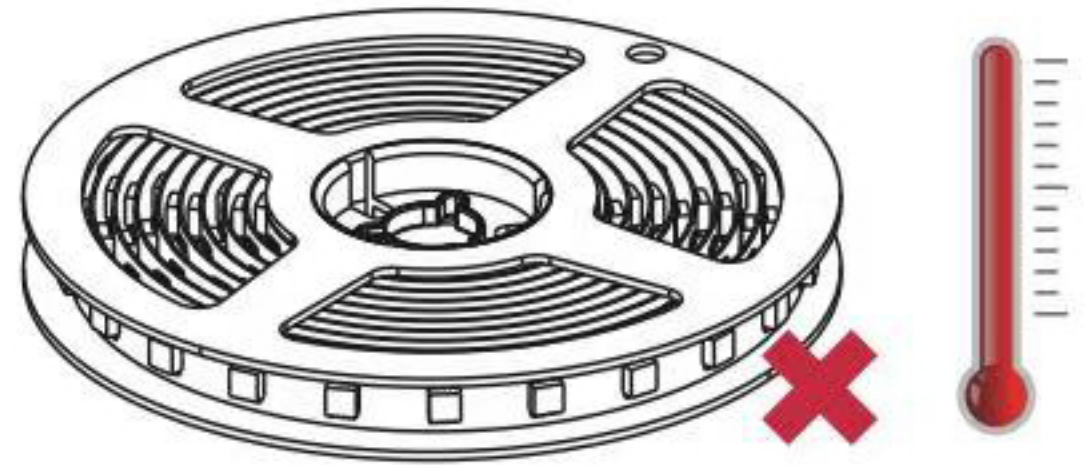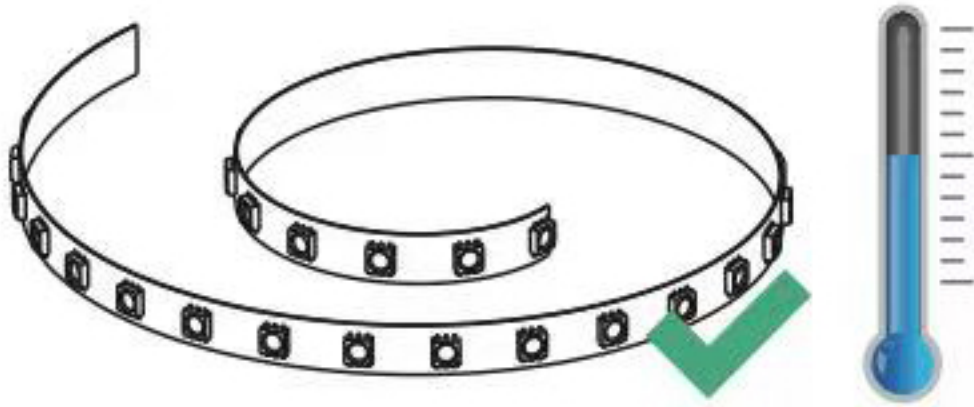

Precaution for Use

LED Strips do not dissipate heat well when rolled up. This may result in damage to LED Strip.

Customer Service Contact Information:

Email: F18825155731@163.com

Whatsapp: 0086 18825155731

UL Certification Notice

This LED strip light is UL certified for North America, which confirms its full compliance with U.S. and Canadian electrical safety standards.

