

SOLDER MASK☒ Top side☒ Bot side

REMOVABLE MASK☐ Top side☐ Bot side

SILKSCREEN☒ Top side☐ Bot side

DRILL

☒ Finished diameter☐ Tool diameter

Nr. of drills:

OUTLINE

☐ Cutted per unit☐ Milled by bridges

☒ Milled per unit☐ 'V' grooved

☐ No machining

MILLING

☒ Axis of line is border of milling☐ Axis of line is trace of milling

MATERIAL


☒ FR4☐ Other _____

TRACK FINISH


☒ HAL☐ Immersion gold

☐ Immersion tin☐ Galvanic gold


☐ Organic coating

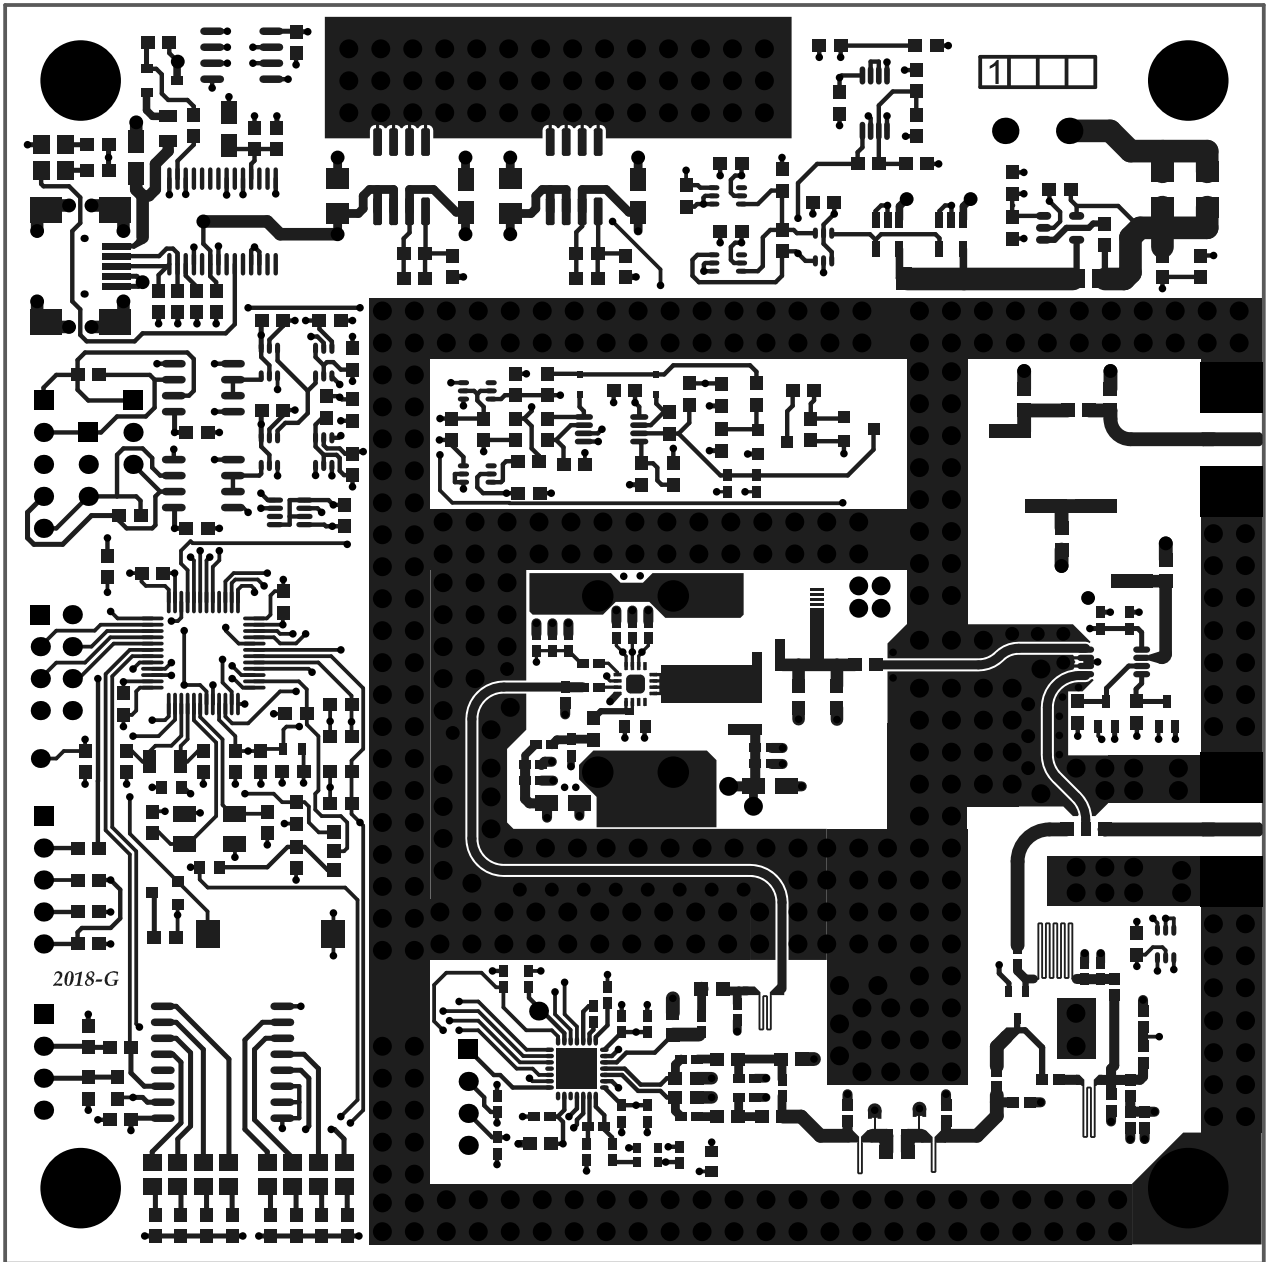


Layer Stack Up Detail for:.Title					
Layer Name	Layer Symbol	Layer Type	Copper Thicknes [um]	Dielectric Thicknes [mm]	Dielectric Type
TOP	top	ROUTING	18		
GROUND	voltage	ROUTING	35		
POWER	ground	ROUTING	35		
BOT	bottom	ROUTING	18		
			* required		
			TOTAL PCB thicknes = 1.5mm		

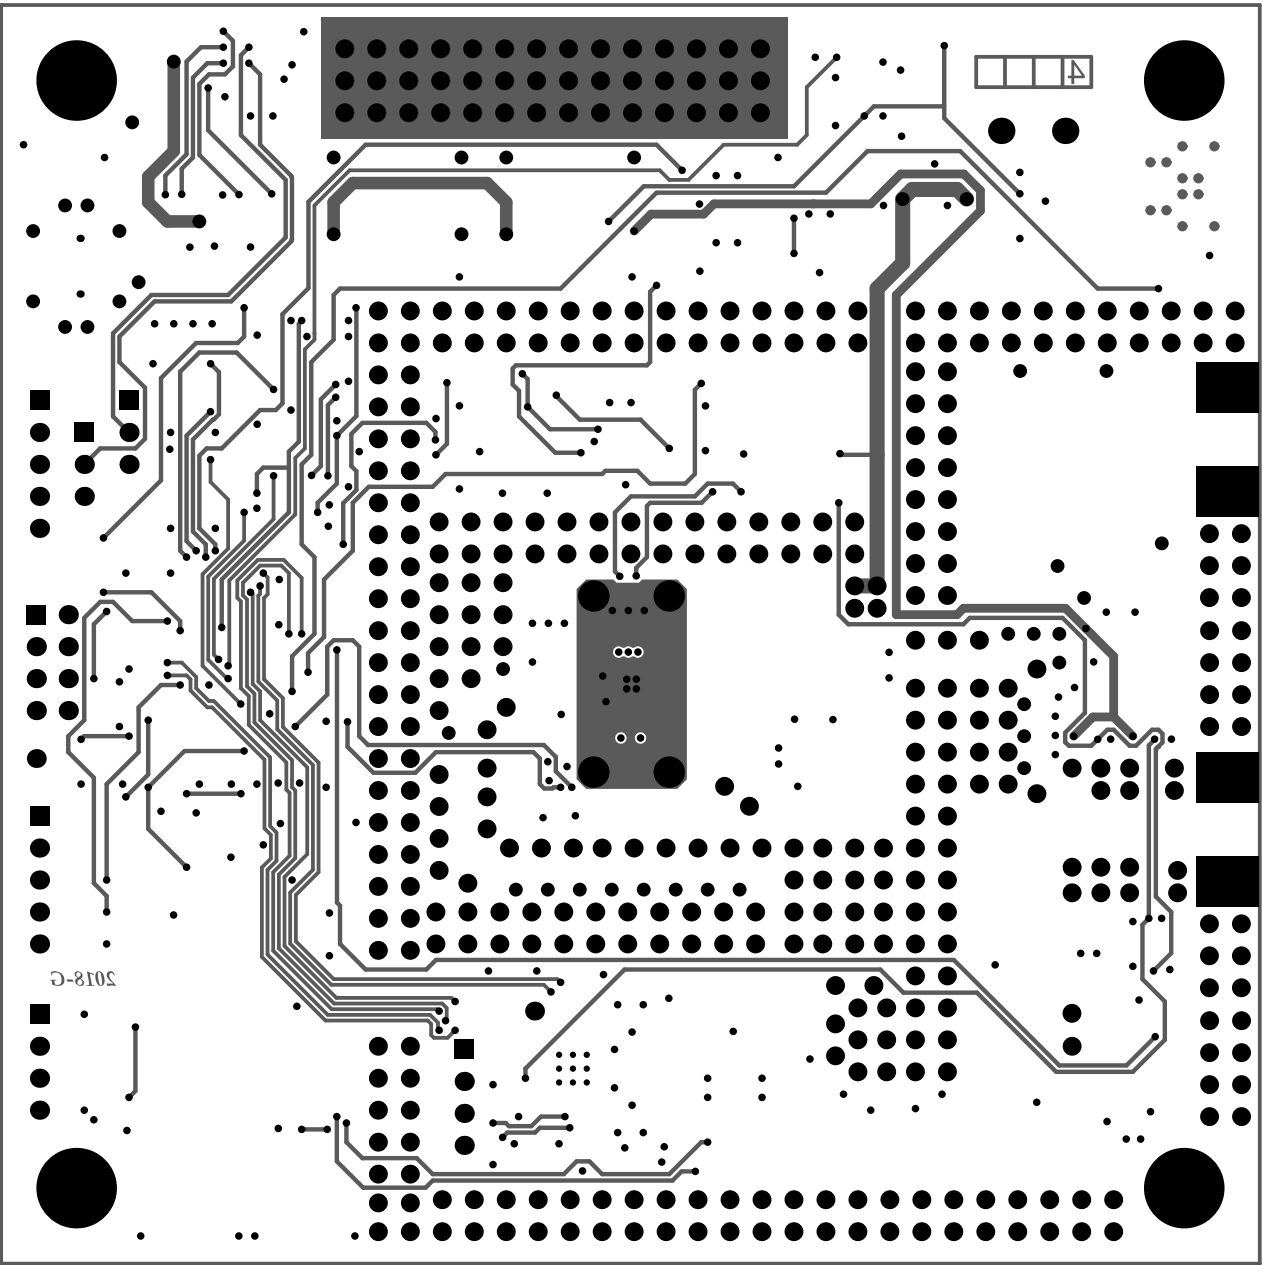

UWB University of West Bohemia Univerzitni 8 301 00 Pilsen	Size: A4	Date: 10.5.2018	Title: PilsenCUBE II		
	Author: OK1CTR@seznam.cz		Subtitle: GROUND TEST RADIO		
	Checked by:		Nr.: 1		Version 0
	Aprooved by:		Type:		Sheet 1 of 1
			File: pilsatii_radio_2.PcbDoc		

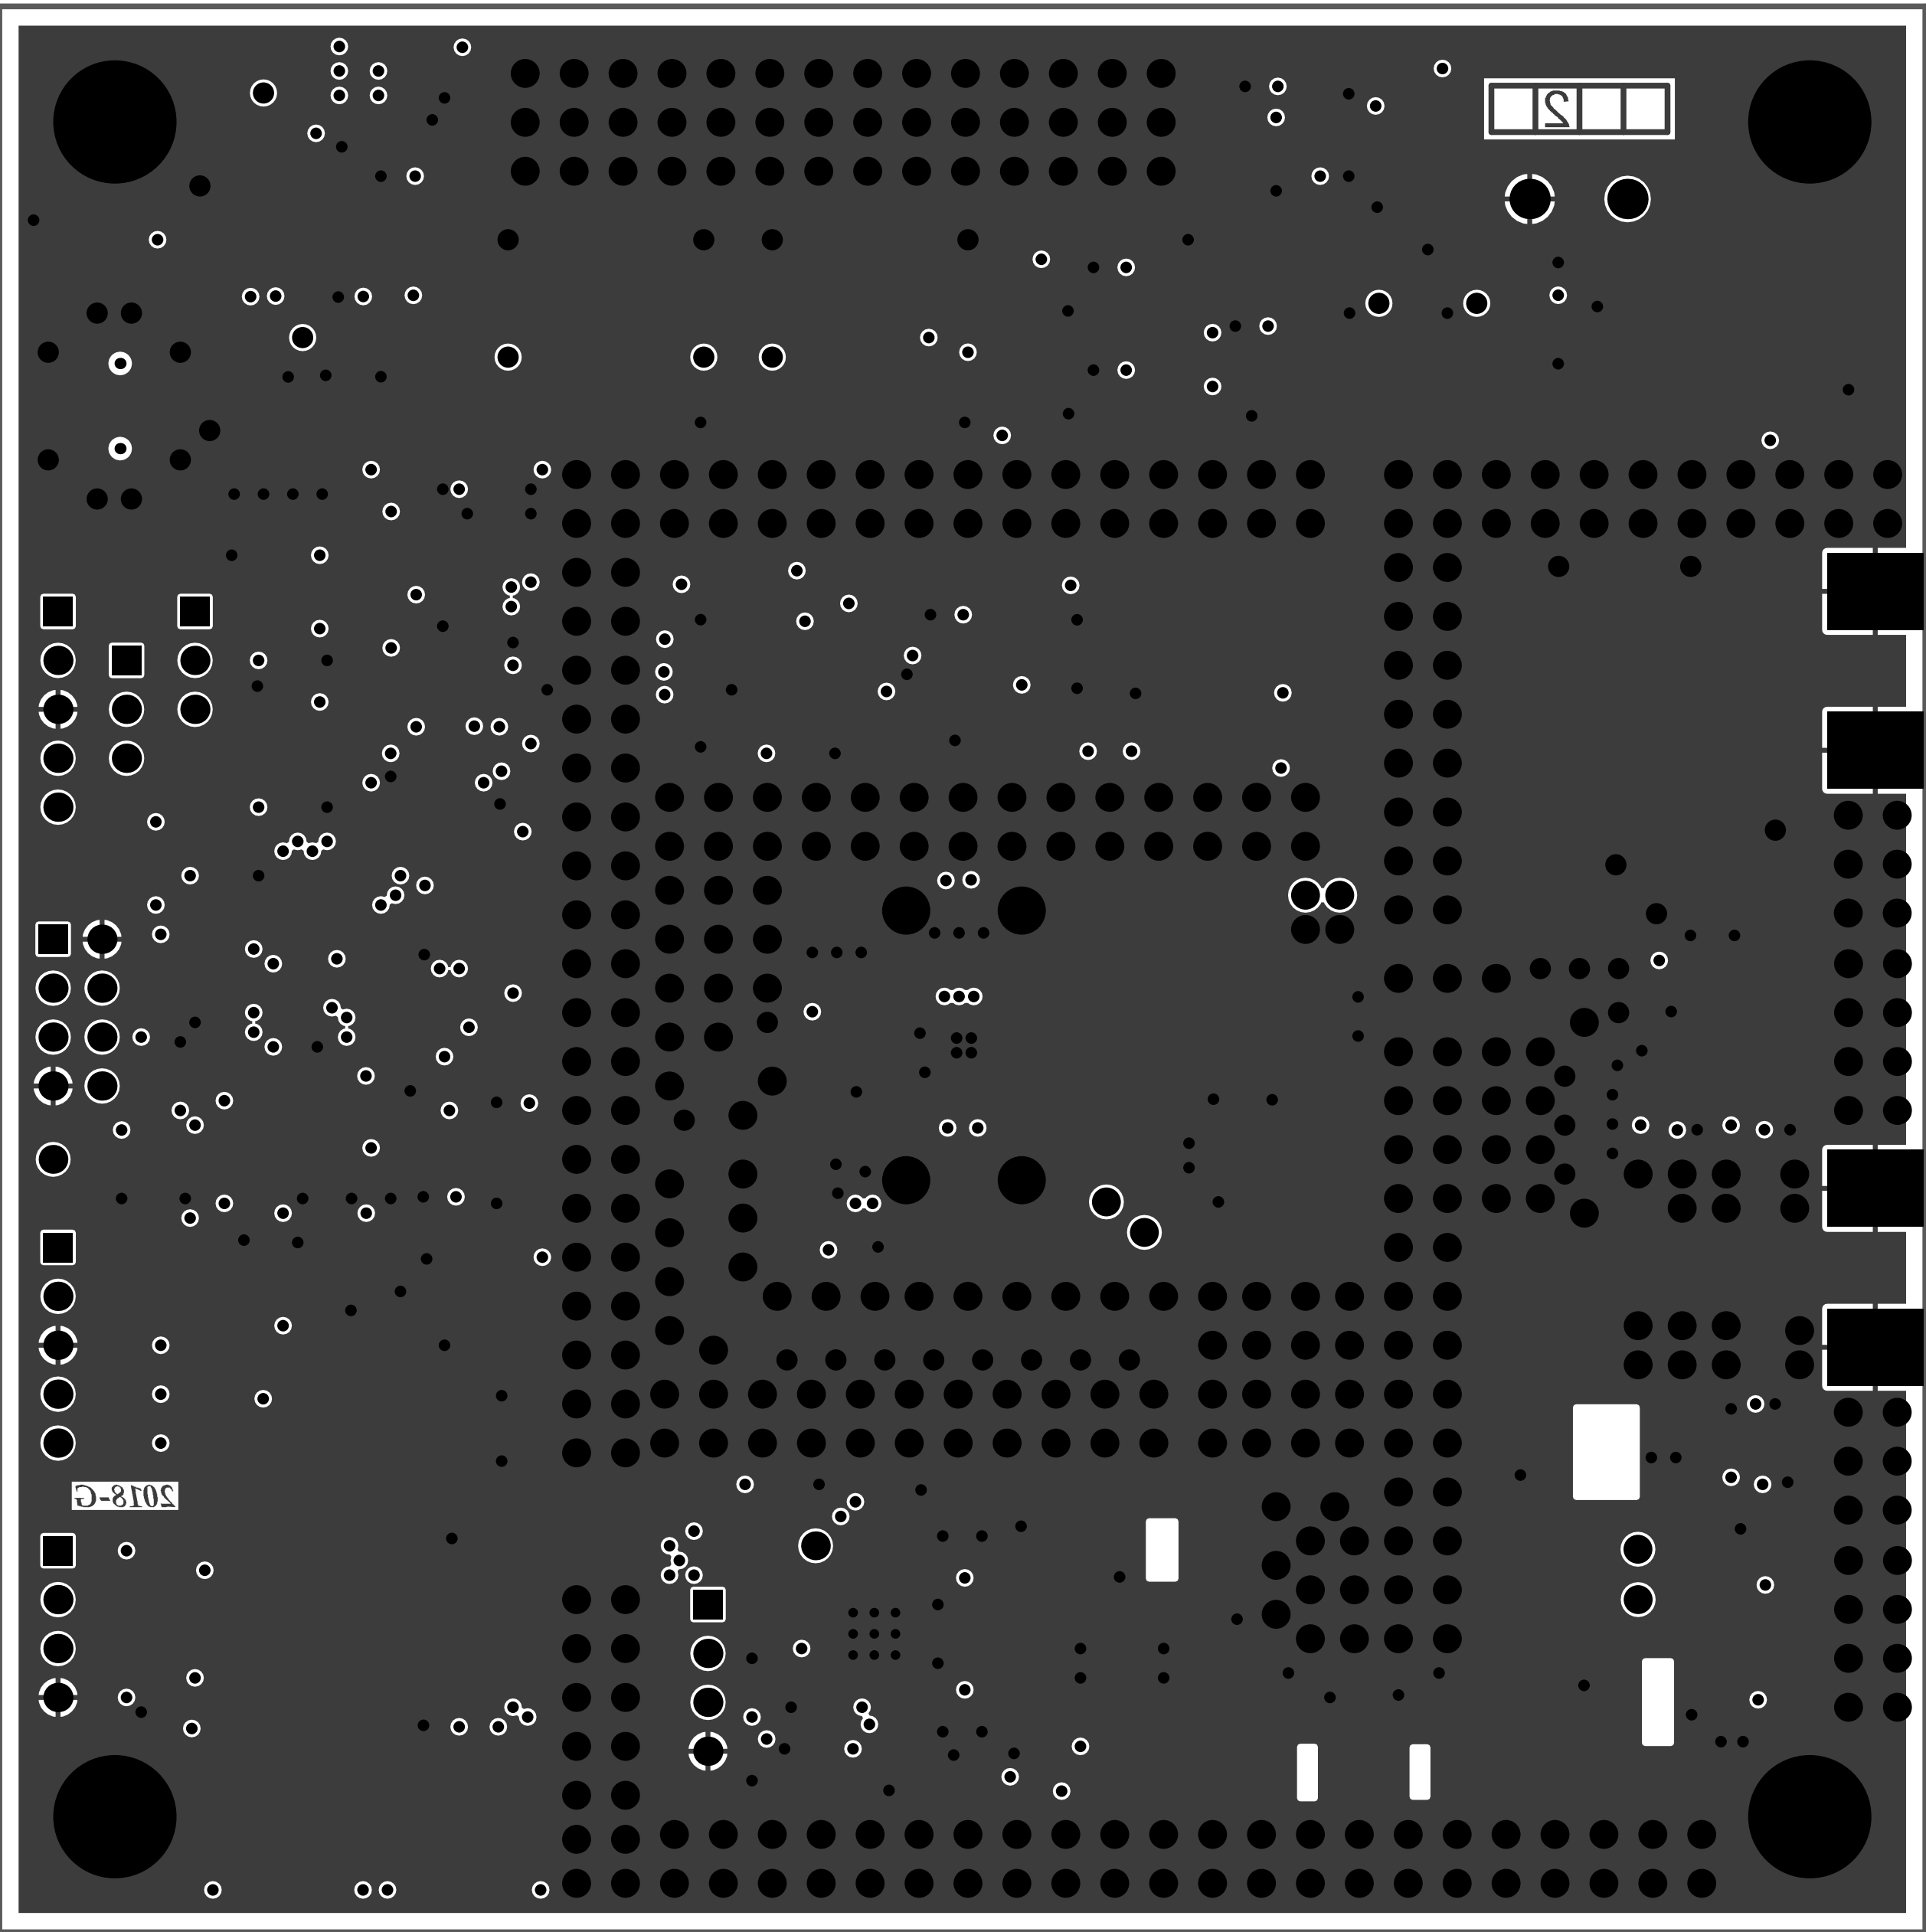

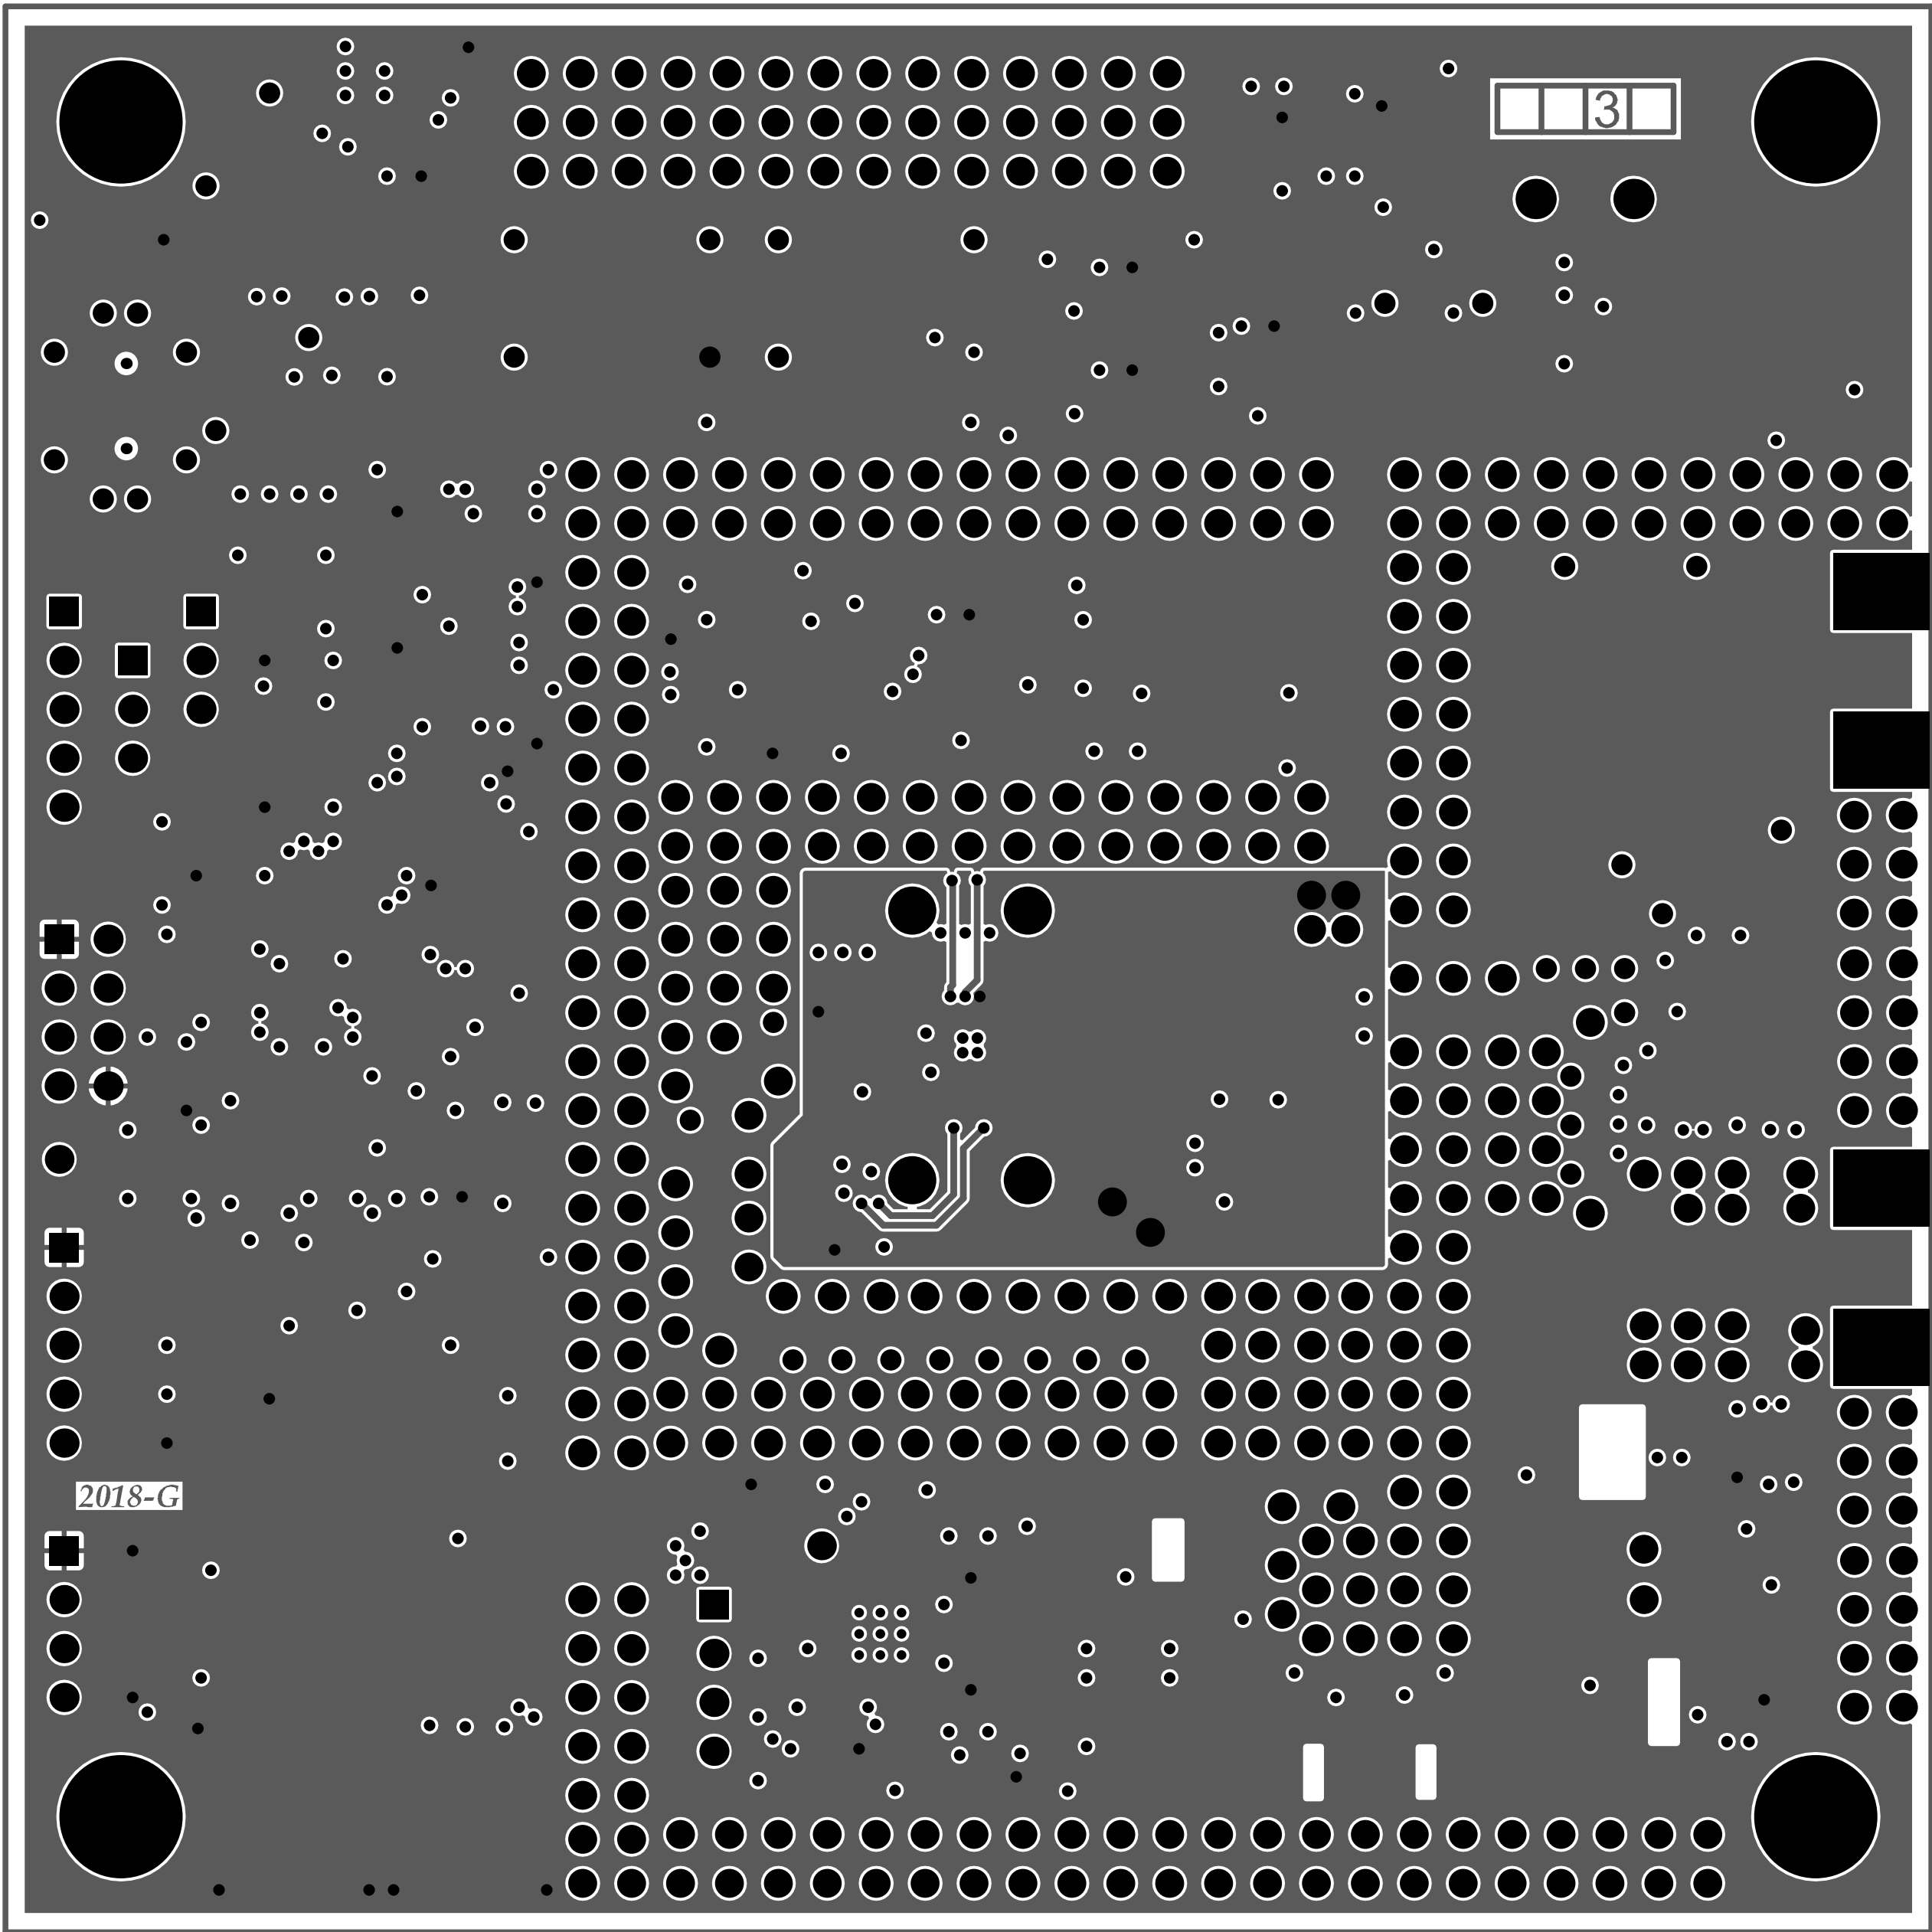

UWB University of West Bohemia Univerzitni 8301 00 Pilsen	Size: A4	Date: 10.5.2018	Title: PilsenCUBE II		
	Author: OK1CTR@seznam.cz		Subtitle: GROUND TEST RADIO		
	Checked by:		Nr.: 1		Version 0
	Aprooved by:		Type:		Sheet 1 of 1
			File: pilsatii_radio_2.PcbDoc		