



*Empowering industries for the future*



# ARITA CONTROL VALVE



#Edisi 2025

[f](#) [t](#) [in](#) [@](#) [d](#) [v](#) @ptaritaprimaindonesiatbk



## GLOBE CONTROL VALVE KP/KT-28 & KP38/KT-38



KP-28



KT-28



KT-38



KP-38

### Specification:

Brand	: ARITA
Actuator	: pneumatic actuator KP series, electric actuator KT series
Model	: 2 way & 3 way
Size	: DN 15 – DN 200 (1/2" – 8")
Nominal pressure	: PN 16 – PN 160, ANSI 150 – ANSI 600
Body material	: Carbon Steel & Stainless steel (2 way), Ductile Iron GGG40.3 ( 3 way)
Plug design	: metal, perforated plug & mixing/diverting plug (3 way)
Seat	: metal seat & soft seat
Connection	: RF Flange, Buttweld
Flow characteristic	: linier & equal percentage
Function	: ON-OFF & Modulating
Stem sealing	: spring loaded ptfe v-ring (-25°C to 250°C) pure graphite packing (-60°C to 650°C) bellow seal with graphite stuffing box (-60°C to 530°C)
Service	: water, steam, oil, gas etc

## GLOBE DIAPHRAGM CONTROL VALVE JIS STANDARD

### Specification:

Body material	: Cast Iron
Pressure rating	: JIS 10k
Service	: Steam, Water, Oil & Other fluids
Size	: DN 15 – DN 100 ( 1/2" – 4")



## ANGLE GLOBE CONTROL VALVE

### Specification:

Body Material	: A216 WCB, A216WC6, WC9, A352 LCB, A351 CF8, A351 CF8M, A351 CF3M, A351 CF3
Pressure Rating	: <b>ANSI Class</b> 125, 150, 300, 600, <b>JIS</b> 10K, 16K, 20K, 30K, 40K, <b>PN1.6</b> , 4.0, 6.4, 10.0 Mpa
End connection	: • Flanged End: FF, RF, RJ, LG According to ANSI B16.5, JIS B2201, JB/T79.1 PN1.6MPa, JB/T79.2 • Welded End: SW, BW • Threaded End: Rc
Size	: 3/4" - 16"
Actuator	: Pneumatic & Electric



Pneumatic

Electric

## CYLINDER CONTROL VALVE JIS STANDARD

### Specification:

Body material	: Cast Iron
Pressure rating	: JIS 10k
Service	: Steam, Water, Oil & Other fluids
Size	: DN 20 – DN 100 ( 3/4" – 4")



## DIAPHRAGM VALVE WITH PNEUMATIC ACTUATOR

### Specification:

Body material	: Carbon steel, stainless steel
Lined	: PFA
Pressure rating	: PN 10, PN 16, ANSI 150, JIS 10k
Actuator	: Diaphragm pneumatic actuator single acting
Medium	: Water, Gas, cChemical
Size	: DN 20 - DN 200 (3/4" – 8")



## SEGMENTED BALL VALVE

### Specification:

Body	: Carbon Steel SA216WCB, Stainless Steel SS304, Stainless Steel SS316
Size	: DN 25 – DN 500 (1" – 20")
Pressure rating	: PN 10 – PN 63, ANSI 150 - ANSI 600
Seat	: metal seat, soft seat
End connection	: RF flange, wafer
Application	: pulp & paper/waste water treatment/ food & beverage/chemical plants/power plants etc.
Available	: Manual, with pneumatic actuator & electric actuator



Pneumatic

Electric



## KNIFE GATE CONTROL VALVE

### Specification:

Body	: Carbon Steel SA216WCB, Stainless Steel SS304, Stainless SS316
Connection	: Wafer, Lugged
Pressure rating	: PN 10, PN 16, ANSI 150, JIS 10k
Actuator	: Pneumatic Actuator (Double acting/single acting), Electric actuator
Seat	: metal seat, soft seat
Size	: DN 50 – DN 600 (2" – 24")
Application	: Pulp & paper/waste water treatment/food & beverage/chemical plants/power plants etc.



Pneumatic



Electric

## BALL CONTROL VALVE

### Specification:

Body	: Cast Iron, Carbon Steel, Stainless Steel SS304, Stainless Steel SS 316
Size	: 1/2" – 8" (DN 15 – DN 200)
Connection	: RF flange, Treaded, Butt Weld
Pressure rating	: PN 16 – PN 40, ANSI 150 – ANSI 600, JIS 10K



Pneumatic



Electric

## MOTORIZED BALL VALVE FOR HVAC

### Specification:

Body Material	: Brass, SS304, SS316
Voltage	: 12 VDC, 24 VDC, 24 VAC, 220 VAC
Size	: 1/2" - 1"
Connection	: Screw end BSPT, NPT
Function	: ON OFF, MODULATING 4-20 mA
Enclosure	: IP 65



## BUTTERFLY VALVE CONTROL VALVE

### Specification:

Body	: Cast Iron, Carbon Steel, SS316
Size	: 1 1/2" – 56"
Pressure rating	: PN 10 - PN 16, ANSI 150-ANSI 300, JIS 10K
Connection	: Wafer, Lugged, RF Flanged
Operation	: Pneumatic & Electric Actuator



Pneumatic



Electric

## PLUG CONTROL VALVE

### Specification:

Type	: LUBRICATED DAN NON LUBRICATED
Valve Size	: 1/4 ~ 30
Pressure Rating	: 150 ~ 1500LB, PN 16 ~ PN 100
Materials	: WCB.CF8.CF8M.CF3M.
Valve operator options	: Electric Actuator, Pneumatic Actuator
Bore	: Full Bore
Connection	: Screw End BSPT/NPT, RF Flange, Socket Weld, Butt Weld



Pneumatic



Electric

## RESILIENT GATE CONTROL VALVE

### Specification:

Body Material	: Ductile Iron GGG50
Disc Material	: Ductile Iron GGG50+EPDM
Pressure rating	: PN 10 & PN 16
Connection	: RF Flange
Size	: DN 40 ~ DN 1000 (1 1/2" ~ 40")
Actuator	: Pneumatic & Electric
Operation	: Pneumatic & Electric Actuator



Pneumatic



Electric

## GATE CONTROL VALVE

### Specification:

Body material	: Carbon Steel SA216WCB, Forged Steel A105, SS304, SS316, WC6, WC9
Pressure Rating	: ANSI 150-1500, PN 16 ~ PN 200, JIS 10K ~ JIS 40K
Connection	: RF Flange, Buttweld, Socket Weld
Actuator	: Pneumatic & Electric
Size	: 2" ~ 48" (DN 50 ~ DN 2000)



Pneumatic



Electric

## SELF OPERATED TEMPERATURE CONTROL VALVE

### Specification:

Body material	: Carbon Steel SA216WCB
Pressure Rating	: PN 16, PN 25, ANSI 150
Connection	: RF Flange
Temperature Set Range	: 25 ~ 110 degC, 70 ~ 150 degC
Size	: DN 15 ~ DN 250 ( 1/2" ~ 10")
Catheter Length	: Standard 3.5m, Special customized is 5m, 10m, 15m





## RACK & PINION PNEUMATIC ACTUATOR ROTARY MOTION

### Specification:

Body Material : Alumunium Diecast  
 Action : Double Acting, Single Acting  
 Output Torque : 9 Nm to 9340 Nm at 6 bar air supply  
 Bottom drilling complies with ISO 5211 to match the valve. drilling for assembling accessories are accordance with VDI/VDE 3845 (NAMUR standard)



DFS-Series

## QUARTER TURN ELECTRIC ACTUATOR

### Specification:

Body Material : Alumunium Diecast  
 Model : AOX & CHQ  
 Power Supply : 220 VAC 1 Phase or 380 VAC 3 phase  
 (optional 110 VAC 1 phase, 440 VAC 3 phase, 24 VDC/VAC)

Bottom drilling complies with ISO 5211, Manual override auto declutch mechanism.



AOX- Series

CHQ- Series

## SCOTCH AND YOKE ACTUATOR

Available Double Acting & Single Acting



## MULTI TURN ELECTRIC ACTUATOR

### Specification:

Power Supply : 220 VAC 50/60 Hz 1 phase, 380 VAC 50/60 Hz 3 phase  
 Function : ON OFF, Intelligent ON OFF, Modulating  
 Available with gearbox



## CYLINDER PNEUMATIC ACTUATOR

### Specification:

Bore Size : 32mm – 250mm  
 Stroke : 25mm – 1000mm  
 Action : Double Acting, Single Acting



## POSITIONER

### Specification:

Model	: Electro-Pneumatic Positioner dan Pneumatic-pneumatic positioner
Type	: Linear & Rotary Available input signal 4-20 Ma & output signal 4-20 Ma & HART
Communication	: Available Standard & Smart Positioner



## LIMIT SWITCH BOX

### Specification:

Body	: Alumunium Diecast & SS316
Enclosure	: IP 67, IP 68, Explosion ProofEExdIIBT6 & EExdIICT6
Available Model	: 2 WAY & 3 WAY
Namur Connection Standard, Available with mechanical switch, proximity switch	



## AIR FILTER REGULATOR

### Specification:

Air Regulator, Air Filter, Lubricator, Air Filter Regulator, Air Filter Regulator Lubricator	
Body	: Alumunium diecast, SS, Polycarbonate
Size	: 1/4" – 1"



## HIGH PRESSURE REGULATOR

### Specification:

Connection	: Screw End BSPT Female
Application	: Compressed Air
Range Of Adjustable Pressure	: 0.05 - 3.5 MPa
Max Input Pressure	: 4Mpa
Operating Temperature Range	: -25 - 80°C
Size	: 1/4" - 2"



## DECLUTCHABLE MANUAL OVERRIDE GEAR OPERATOR

### Specification:

High Strength, High Torque	
Torque	: 17 Nm – 110 Nm (Input); 150 Nm – 7000 Nm (Output)
ISO 5211 Mounting Base Standard	



## SOLENOID VALVE FOR PNEUMATIC ACTUATOR

### Specification:

Model	: 5/2 Way & 3/2 Way
Body Material	: Alumunium Diecast
Connection	: Namur Mounting & Standard (INLINE) Mounting
Voltage	: 220 VAC, 110 VAC, &24 VDC
Coil	: Single & Double
Enclosure	: IP 65 & Explosion Proof
Port Size	: 1/4" – 1/2"



## Other Product

## SOLENOID VALVE



*2W Brass*



*ZW Brass*



*PS Brass*



*UPVC*



*2W SS*



*ZW SS*



*PS SS*



*Flange End*

### Specification:

Size	: 1/4" – 2" (Screw End), 2 1/2" – 4" ( Flange End)
Working Pressure	: 0 – 100 bar
Temperature	: -5°C - 25°C (According sealing)
Body Material	: Brass, Stainless Steel, UPVC
Sealing material	: NBR, VITON, EPDM, NBR
Protection Class	: IP 65, Explosion proof
Voltage	: 220 VAC & 24 VDC
Action	: Normally Close, Normally Open
Available with Timer	



## SOLENOID VALVE TIMER WITH MANUAL DRAIN

### Specification:

Working Pressure	: 0-16 bar
Voltage	: 24-230 VAC/DC
Size	: 1/2", 3/8", 1/4"
Connection	: Screw end BSPT
Range Time OFF	: 0.5 – 45 minutes
Range Time ON	: 0.5 – 10 S
Manual Button Set	: Yes
Enclosure	: IP 65 (NEMA4)
Ambient temperature	: -40 ~ 60°C
Maximum medium temperature	: up to 90°C
Valve body material	: forged brass



## ANGLE SEAT Y-PISTON VALVE

### Specification:

Size	: DN 15 – DN 65 (1/2" – 2 1/2") Screw End DN 15 – DN 100 (1/2" – 4") Flange End
Body Material	: SS316
Sealing	: PTFE
<i>Available Plastic &amp; Ss Actuator</i>	
<i>Pneumatic Actuator Double Acting &amp; Single Acting</i>	
<i>Available For Single Acting : Normally Close &amp; Normally Open</i>	



## PRESSURE REDUCING VALVE

### Specification:

Will Reduce the higher upstream and keep the downstream pressure as the pilc setting (adjustable), Regardless of of the downstream variations of flow or press

Body Material	: Ductile Iron GGG40.3, SS316
Pressure Rating	: PN 16, PN 25, ANSI 150
Connection	: RF Flanged & Screw end BSPT
Diaphragm	: NBR, EPDM, VITON
Size	: 1/2" – 14" (DN 15 – DN 350)
Application	: Water, Liquid



## PRESSURE REDUCING VALVE UL LISTED

### Applications :

House Station Feeds, Sprinkler systems with over pressure, deluge system with over pressure, Foam System, Fire hydrant water supply

### Specifications :

Body material	: Ductile Iron
Size	: 3" ~ 8"
Pressure setting	: 30 – 100 psi (2-7 bar)
Available flange ends	: ANSI 150/300, PN 16/25, JIS 10K/20K



## PRESSURE RELIEF VALVE

It is used to keep the upstream pressure in a safety environment or above a setting pressure as sustaining.

### Specifications :

Body Material	: Ductile Iron GGG40.3, SS316
Pressure Rating	: PN 16, PN 25, ANSI 150
Connection	: RF Flanged & Screw end BSPT
Diaphragm	: NBR, EPDM, VITON
Size	: 1/2" – 14" (DN 15 – DN 350)
Application	: Water, Liquid



## BACK PRESSURE VALVE

### Specifications :

Body Material	: SS316
Sealing	: NBR, VITON, EPDM
Size	: 1/2" ~ 6" ( DN 15 ~ DN 150)
Pressure rating	: ANSi 150, PN 16, JIS 10K, screw end BSPT & NPT
Pressure Adjusting	: 1 ~ 5 bar, 4 ~ 10 bar



## REMOTE FLOAT CONTROL VALVE

### Specifications :

Body Material	: Ductile Iron GGG40.3
Pressure Rating	: PN 16, PN 25
Connection	: RF Flanged
Diaphragm	: NBR,
Size	: 2" – 14" (DN 50 – DN 350)
Application	: Water



## SURGE ANTICIPATING VALVE

### Specifications :

Body Material	: Ductile Iron GGG40.3
Pressure Rating	: PN 16, PN 25
Connection	: RF Flanged
Diaphragm	: EPDM
Size	: 2" – 14" (DN 50 – DN 350)
Application	: Water



## WATER HAMMER ARRESTER

Water Hammer Arrester is a tool that serves to prevent collisions of water in the pipe is stopped suddenly that may cause pressure rise very sharply resembling a punch. Effect if not using water hammer arrester is a burst pipe, broken pipe connection and damage to the check valve.

### Specification :

Model Available	: i-style & L-Style
Applied condition	: Water
Applied temperature	: -15 ~ 80 degC
Diaphragm material	: NBR & Viton
Body Material	: Ductile Iron, Bronze, & SS304
Size	: DN 15 – DN 100 (1/2" – 4") for connection Thread DN 65 – DN 300 (3" – 12") for connection RF Flanged



## MECHANICAL FLOAT DRAIN VALVE

### Features:

Automatic discharge without human management and other functions. When the water reaches a certain volume, under the leverage and buoyancy principle, discharge the water automatically.

### Specification:

Connection	: G1/2"
Seal material	: NBR



## BREATHER VALVE

### Specifications :

Size	: DN 50 – DN 300 (2" – 12")
Pressure	: PN 16, JIS 10K, ANSI 150
Connection	: RF Flanged
Body	: Carbon Steel SA216WCB, Aluminium, SS304, SS316



## FLAME ARRESTER

Flame arrester adalah alat (device) untuk menahan api sampai waktu tertentu sesuai desainnya. Misalnya pada aplikasi storage tank dipakai breather valve yang merupakan gabungan vent dan flame arrester. Pada aplikasi flare system, semua flare system sudah dilengkapi dengan flame/flash back protection

### Specification:

Available model	: Inline & End of Line
Body Material	: Carbon Steel, Stainless Steel SS 304, SS 316 Replaceable element
Connection	: RF Flanged JIS 10K, PN 16, ANSI 150
Size	: DN 20 – DN 400
Explosion level	: IIA, IIB, IIC



## EMERGENCY VENT COVER VALVE

### Specification :

Body Material	: Carbon Steel, Alumunium, SS304, SS316
Connection	: RF Flange JIS 10K, PN 16, ANSI 150
Size	: DN 200 ~ DN 700 (8" ~ 28")



## AUTOMATIC AIR VENT VALVE

### Specification:

Size	: 3/8" – 1"
Body Material	: SS304, SS316
Pressure	: 16 bar
Temperature	: -50°C~200°C
Connection	: Screw End BSPT



## BREATHER VALVE SS304

### Application:

Independent heating system, central heating system, solar system, central air conditioning, and boiler

Size	: 3/8"~1"
Body material	: SS304/SS316
Temperature	: -50~200 degC
Pressure	: 16 bar
Connection	: Screw End Male BSPT (NPT special order)



## STAINLESS STEEL ANTI SIPHON VACUUM BREAKER

The Anti-siphon vacuum breakers are widely used in many kinds of systems where vacuum is so easily appeared. It opens to permit air to enter when there is a pressure drop

Application medium	: Water, Intermixture of water and glycol (density lower than 50%)
Working pressure	: 20 bar
Body material	: SS304
Connection	: Screw end BSPT
Port Size	: 1/2"



## BALANCING VALVE

### Specification:

Body Material	: Brass, Ductile Iron
Connection	: RF Flanged & Screw end
Pressure Rating	: PN 16
Size	: DN 15 – DN 500 (1/2" – 20")



## DIGITAL THERMOSTAT

### Specification :

Sensor : NTC  
Power Supply : 110-240 VAC 50~60 Hz



## PNEUMATIC FILLING VALVE

### Specification :

Application : Drinks Filling Machinery  
Actuator : Pneumatic Actuator  
Action : Single acting & Double acting  
Body material : SS304, SS316  
Sealing Material : PTFE  
Fluid Temperature : -10 ~ 120 °C  
Ambient temperature : -20 ~ 60 °C  
Working pressure : 1.6 MPa  
Length : 267 mm & 312 mm  
Port size : 1/2" ~ 2"



## TIMER FOR SOLENOID VALVE

### Specification:

Voltage : 24~240 VAC/VDC 50/60 Hz  
Class protection : IP 65  
Time ON : from 0.5 to 10 s  
Time OFF : from 0.5 to 45 min



## PRESSURE REDUCING VALVE APR-2A

### Specification:

Applicable Fluid : Water  
Primary Pressure Max : 1.0 MPa  
Secondary Pressure : Outer Spring 0.05 ~ 0.35 MPa  
Inner Spring + Outer Spring 0.3~0.69 MPa  
Reducing Ratio : 10:1  
Min. Differential Pressure : 0.05 MPa  
Min Adjustable Flow water : 2~5 L/M Fluid  
Temperature : 5~80°C  
End connection : 15~25A PT/NPT SCREW  
32~150A JIS 10K RF FLANGE PN 16 RF FLANGE  
Material body : GC200 GCD 450  
Disc : SS304  
Seat : NBR  
Hydraulic Test pressure : 1.5 MPa



Screw Type

Flange Type





## PRESSURE REDUCING VALVE APR-41

### Specification :

Applicable Fluid	: Water, Air
Primary Pressure Max	: 2.0 MPa
Secondary Pressure	: 0.05 ~ 0.69 MPa (standard), 0.69~1.4 MPa
Reducing Ratio	: 10:1
Min. Differential Pressure	: 0.05 MPa
Temperature	: 5~80°C
End connection	: JIS 20K/PN 16 RF FLANGE
Material body	: WCB, STS316
Disc	: NBR
Seat	: STS
Size	: 15A ~ 150A (1/2" ~ 6")



## BLANKETING VALVE

### Specification :

Body material	: Cast Iron, Cast Steel, Stainless Steel
Flange Standard	: JB/T79.1-94, 79.2-94, ANSI B16
Pressure Rating	: PN 16 ~ PN 64 ANSI 150 ~ ANSI 300 LB
Size	: DN 20 ~ DN 100 ( 3/4" ~ 4")
Plug Type	: Single Seated, Double Seated, Cage Guided
Stem Material	: Stainless Steel
Pressure Balancing	: Stainless Steel Bellows
Flow Characteristic	: Quick Open
Working Temperature	: 80 degC
Adjusting Pressure Range	: 15 ~ 2500 kPa




## PILOT TYPE MULTI FUNCTION CONTROL VALVE

### Specification :

Type	: Pressure Reducing Valve, Pressure Relief Valve, Pressure Sustaining Valve
Connection	: RF Flanged, Threaded
Pressure Rating	: JIS 10K, PN 10, PN 16, ANSI 150
Size	: 1.5" ~ 2" Threaded 2" ~ 14" RF Flanged
Body Material	: Cast Iron, Ductile Iron, Bronze, Stainless Steel 304, 316
Fluid Medium	: Fluid, Air
Applied Temperature	: -15 ~ 80 degC



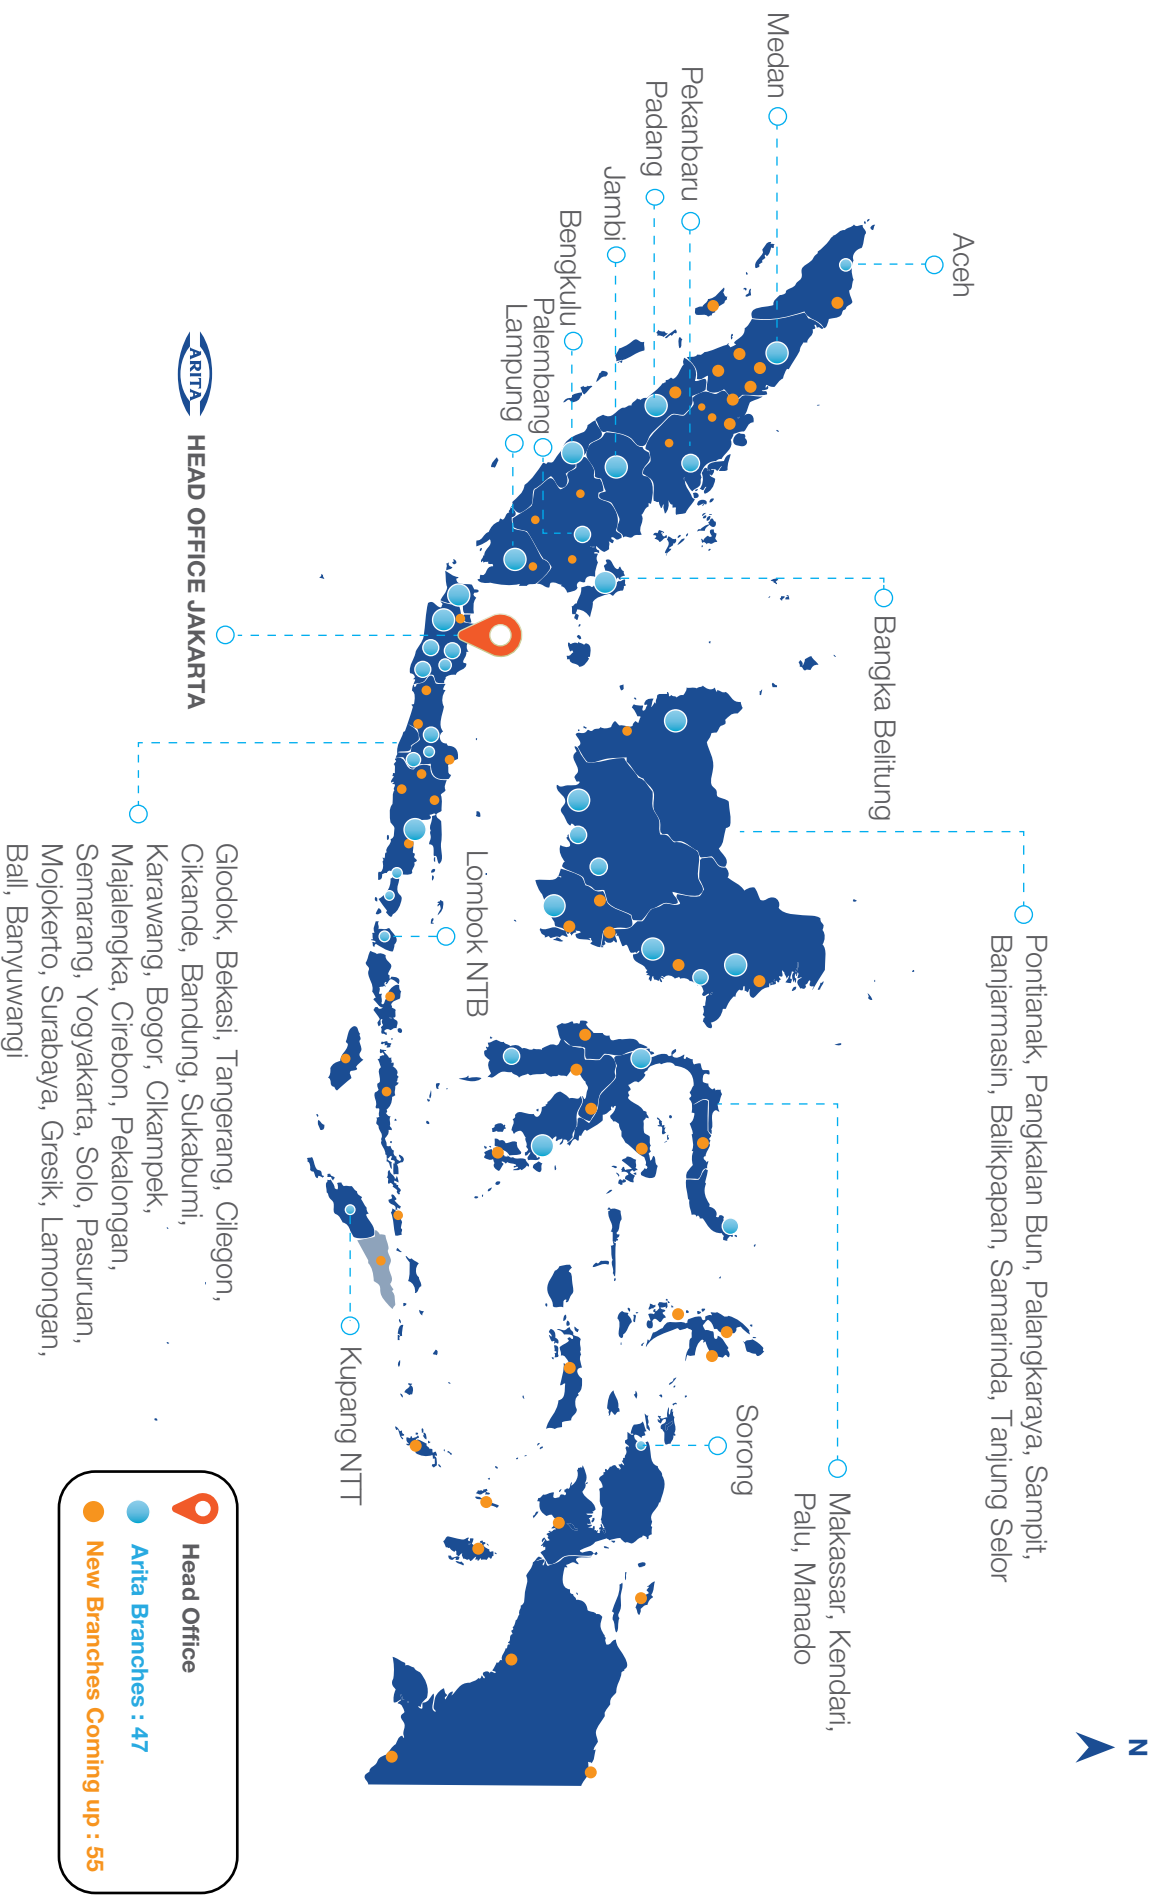

# OUR BRANCHES

## JAKARTA

### ARITA GLODOK

DKI JAKARTA  
Jl. Gandaria No. 3 Mangga Besar  
Jakarta Indonesia

## WEST JAVA REGION & BANTEN

### ARITA TANGERANG

BANTEN  
Ruko Sentra Ready Cimone Blok A No.6  
Jl. Gatot Subroto KM 2.5 Cimone, Tangerang  
Indonesia

### ARITA CILEGON

BANTEN  
Perumahan Metro Cilegon Blok E1  
No. 02 Cilegon Banten 42112  
Indonesia

### ARITA CIKANDE

BANTEN  
Jl. Raya Serang - Jakarta KM 27 Komplek  
Ruko CMS Blok B Cikande Kab. Serang Banten  
42186 - Indonesia

### ARITA BEKASI

JAWA BARAT  
Cluster Green Paradiso  
Jl. Raya Letjen R. Suprpto, Blok Athena No 7  
Cimuning, Kec. Mustika Jaya, Kota Bekasi,  
Jawa Barat 17155 - Indonesia

### ARITA BANDUNG

JAWA BARAT  
Jl. Sentra Raya Komplek Town Place  
No. 21 Baros-Cimahi 40251, Bandung  
Indonesia

### ARITA KARAWANG

JAWA BARAT  
Ruko Karawang  
Green Village Blok V 1 Jl. Raya  
Perumnas Teluk Jembe No. 79  
Karawang 41361 - Indonesia

### ARITA BOGOR

JAWA BARAT  
Ruko Graha Cibirong Blok C7  
Jl. Raya Jakarta-Bogor No.1,  
Cirimekar, Cibirong,  
Bogor 16917, Indonesia

### ARITA CIREBON

JAWA BARAT  
Kantor KADIN - JL Terusan Pemuda  
No.12 Sunyaragi, Kesambi Kota Cirebon  
45132 - Indonesia

### ARITA PURWAKARTA

JAWA BARAT  
Perum Pesona Griya Asri B3/22  
Cisureuh - Purwakarta  
Jawa Barat Indonesia

### ARITA SUKABUMI

JAWA BARAT  
Perum Genting Puri  
Jl. Semarang Blok D No.3 Rt 002/nw 001  
Cibeureum Sukabumi

## CENTRAL JAVA REGION

### ARITA PEKALONGAN

JAWA TENGAH  
Jl Sultan Agung No. 46 Klidang Wetan  
Batang- Indonesia

### ARITA SEMARANG

JAWA TENGAH  
Komplek Pertokoan Jurnatan Blok B No. 50  
Purwodinatan, Semarang Tengah  
Semarang 50121- Indonesia

### ARITA SOLO

JAWA TENGAH  
Griya Kusuma No A4 Jl. Mangesti Raya  
Gentan Sukoharjo  
Indonesia

## EAST JAVA REGION

### ARITA PASURUAN

JAWA TIMUR  
Komplek Meiko Pandaan Square  
Blok A No. 3, Jl. Urip Sumoharjo,  
Nogosari Kec. Pandaan  
Pasuruan 67156 - Indonesia

### ARITA SURABAYA

JAWA TIMUR  
Komplek Pergudangan Tritan Point Wedi I  
blok B-39 Raya, Ketajen Wedi Gedangan  
Sidoarjo 61254 - Indonesia

### ARITA GRESIK

JAWA TIMUR  
Komplek Pondok Permata Suci  
No. 46, Kav 58 Jl. Raya Berlian Biru  
Gresik 61122 - Indonesia

### ARITA BALI

DENPASAR BALI  
Jl. Pendidikan No. 23, Sidakarya  
Denpasar Bali

### ARITA MOJOKERTO

JAWA TIMUR  
Perum Gatoel Jl. Jawa No.5  
Kel. Kranggan, Kec. Pajurit Kulon 61321  
Indonesia

### ARITA BANYUWANGI

DENPASAR BALI  
Mendut regency blok Q no 19,  
Taman, Banyuwangi

## NORTH SUMATERA REGION

### ARITA MEDAN

SUMATERA UTARA  
Jl. Gunung Krakatau No. 11  
D Brayan Bengkel Baru  
Medan Timur 20239 - Indonesia

### ARITA PEKANBARU

RIAU  
Komplek Pergudangan Platinum.  
Jl. Air Hitam No.8 A & 8 B.  
Kel. Simpang Baru, Kec. Tampan  
Kota Pekanbaru - Indonesia

## ARITA PADANG

SUMATERA BARAT  
Jl. Raya Pondok Kopi No. 15A, RT 03/RW II  
Kelurahan Surau Gadang, Kecamatan Nanggalo,  
Padang 25146 - Indonesia

## SOUTH SUMATERA REGION

### ARITA JAMBI

JAMBI  
Jl. Brigdjen Katamsno No. 26  
Jambi Timur, Jambi 36142 - Indonesia

### ARITA PALEMBANG

SUMATERA SELATAN  
Jl. SIARAN No. 1 Sako  
Palembang 30163 - Indonesia

### ARITA BENGKULU

BENGKULU  
Jl. Semangka Raya No. 40 A  
Panorama Lingkar Timur  
Bengkulu 38226 - Indonesia

### ARITA BANDAR LAMPUNG

BANDAR LAMPUNG  
Komplek Ruko Taman Kedamaian  
Asri Blok 1 Jl. Hayam Wuruk No. 5 - 6  
Kedamaian Bandar Lampung 35122  
Indonesia

### ARITA BANGKA - BELITUNG

KEPULAUAN BANGKA - BELITUNG  
Jl. Soekarno Hatta (Kuba) No. 637  
Pangkalan Baru  
Pangkal Pinang 33146 - Indonesia

## KALIMANTAN REGION

### ARITA PONTIANAK

KALIMANTAN BARAT  
Jl. Arteri Supadio No. 1C (Depan Restoran  
Dangau) Kabupaten Kubu Raya  
Kalimantan Barat - Indonesia

### ARITA SAMPIT

KALIMANTAN TENGAH  
Sampit Palangka  
Jl. Tjilik Riwut Ruko KM. 2.5 No. 3-4  
Bamang Tengah, Sampit 74512 - Indonesia

### ARITA PANGKALAN BUN

KALIMANTAN TENGAH  
Jl. Malijo Ruko No. 2 Pangkalan Bun  
Kalimantan Tengah - Indonesia

### ARITA PALANGKARAYA

KALIMANTAN TENGAH  
Jln. Badak Raya, Ruko Biru, RT. 05 RW. IX  
Kel. Bukit Tunggal Kec. Jekan Raya,  
Palangka Raya – Kalimantan Tengah 73112  
Indonesia

### ARITA SAMARINDA

KALIMANTAN TIMUR  
Komplek Ruko Plaza Juanda  
Blok B Jl. Ir. H. Juanda No. 26 - 27  
Samarinda, Kalimantan Timur  
Indonesia

## ARITA BALIKPAPAN

KALIMANTAN TIMUR  
Jl. Ruhui Rahayu No. 112  
Sepinggari Baru - Balikpapan  
Indonesia

## ARITA BANJARMASIN

KALIMANTAN SELATAN  
Jl. A. Yani Km.23,7 Landasan Ulin  
Banjarbaru 70723 - Kalimantan Selatan  
Indonesia

## SULAWESI REGION

### ARITA MANADO

SULAWESI UTARA  
Komplek Pasar Segar Blok RA/15  
Jl. Yos Sudarso, Paal Dua  
Manado, Sulawesi Utara 95129  
Indonesia

### ARITA PALU

SULAWESI TENGAH  
Jl. Towua No. 76 A  
Palu - Indonesia

### ARITA MAKASAR

SULAWESI SELATAN  
Pergudangan Lantebung Jl. Raya PU  
No. 40 Parangloe Tamalanrea, Makassar  
Sulawesi Selatan 90244 - Indonesia

### ARITA KENDARI

SULAWESI TENGGARA  
JL. MT. Haryono, No. 79 A,  
Kec. Poasia, Kel. Kambu, Kendari  
Sulawesi Tenggara 93231 - Indonesia

## EAST NUSA TENGGARA

### ARITA KUPANG

NTT  
Jalan Pemuda No 93 RT/RW 012/004  
Kel. Oetete, Kec. Oebobo, Kota Kupang  
Indonesia

## WEST NUSA TENGGARA

### ARITA LOMBOK

NTB  
Jalan Arya Banjar Getas No. 12 Gatep kelurahan  
Taman Sari kecamatan Ampenan  
Kota Mataram Nusa Tenggara Barat  
Indonesia

*Subsidiary of Arita :*

**ANS BONT**  
Technologies Nusantara

**GRT**

**IAPS**  
INTERNATIONAL ASIA PRIME SOURCE

**AIRA**

**IAPS**

**IF**

**Q**

**ISM**

**PT. SARUHARANG BAMBUN PERSADA**

**SBP**

**SPTI**

**GCE**

**WTP**

## Head Office

Komplek Rukan Sunter Permai Blok C No. 9  
Jl. Danau Sunter Utara, Sunter  
Jakarta Utara 14350  
Indonesia

☎ +6221 6519 188

☎ +6221 6516 107

✉ info@arita.co.id



www.arita.co.id