

ESP32-C5-WROOM-1

Table 3-1. Default Configuration of Strapping Pins

Strapping Pin	Default Configuration	Bit Value
GPIO25	Floating	-
GPIO26	Floating	-
GPIO27	Pull-up	1
GPIO28	Pull-up	1
GPIO7	Floating	-
MTMS	Floating	-
MTDI	Floating	-

Table 3-3. Boot Mode Control

Boot Mode	GPIO26	GPIO27	GPIO28
SPI Boot ¹	Any value	Any value	1 ¹
Joint Download Boot ²	Any value	1	0
Joint Download Boot ³	0	0	0

¹ Boot marks the default value and configuration.


² Joint Download Boot 0 mode supports the following download methods:

- USB-Serial-JTAG Download Boot
- UART Download Boot
- SPI Slave Download Boot (chip revision v0.1 only)



³ Joint Download Boot 1 mode supports the following download methods:

- UART Download Boot
- SDIO Download Boot

⁴ In modules with the in-package SPI PSRAM, this pin is used as GPIO23 for SPI PSRAM and cannot be used for other functions. In modules without the in-package SPI PSRAM, this pin can be used as GPIO25.

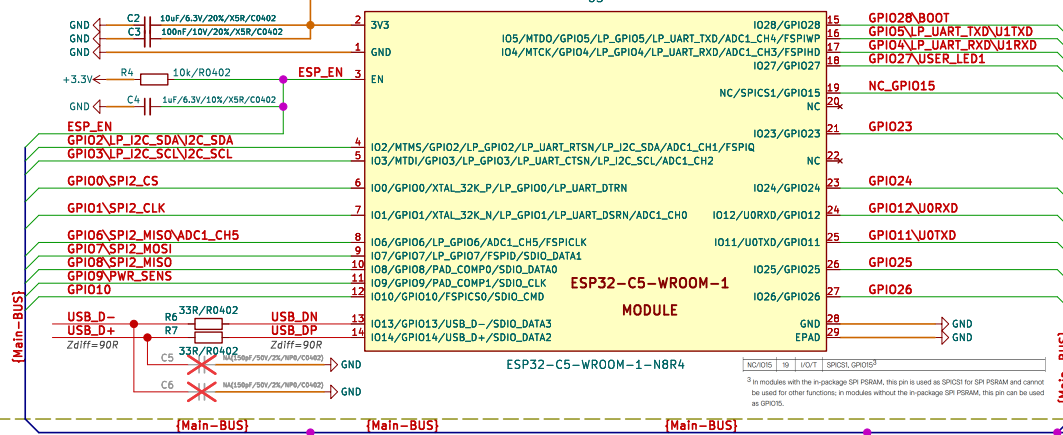


USB/JTAG

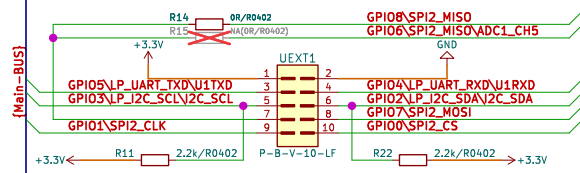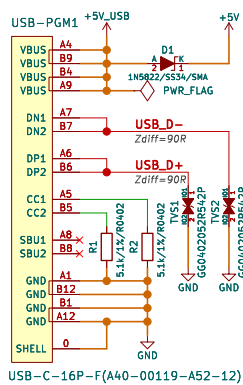

UEXT


5.2.1.3 I2C Controller

ESP32-C5 has an I2C and an LP I2C bus interface. I2C is used for I2C master mode or slave mode, depending on your configuration, while LP I2C is always in master mode.

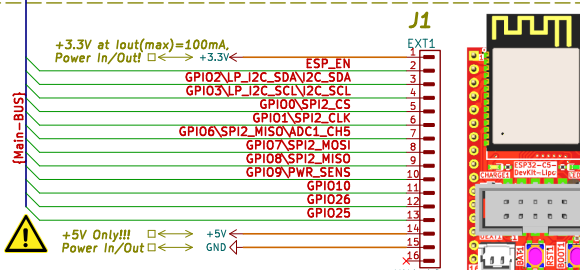

Extensions

Extension's pinout is fully compatible to the Espressif's ESP32-C5-DevKitC-1.

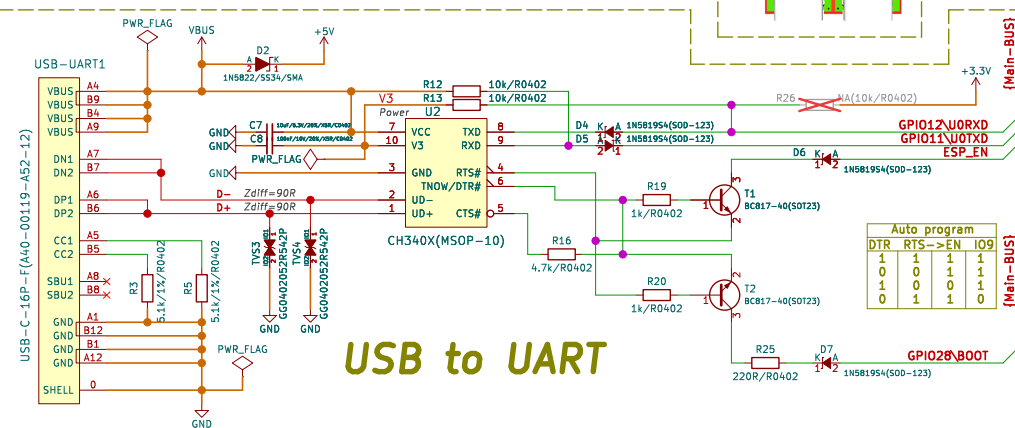


USB to UART


LED



BUTTONS



Power Supply

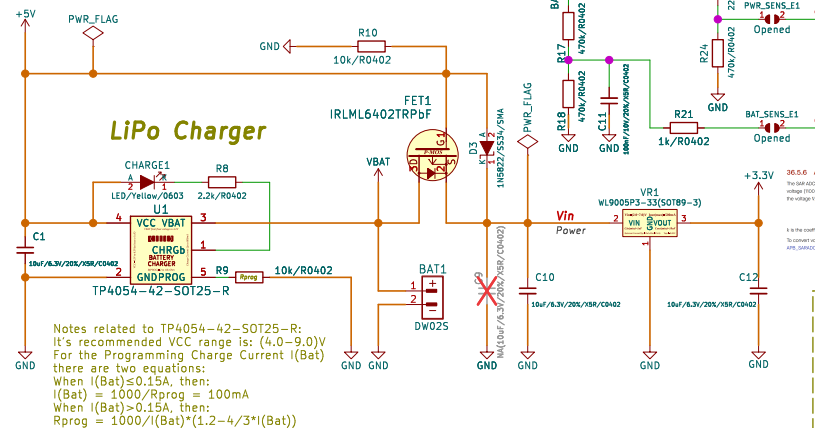

LiPo Charger


Battery Measurement

External Power Sense

Mounting Holes



Fiducials



<https://www.olimex.com/>

OLIMEX LTD.

Sheet: /

File: ESP32-C5-DevKit-Lipo_Rev_A.kicad_sch

Title: ESP32-C5-DevKit-Lipo

Size: A3

Date: 2025-09-12

KiCad E.D.A. kicad 7.0.11-7.0.11-ubuntu22.04.1

Rev: A

Id: 1/1