



Certificate # 2861.01



中国认可
国际互认
检测
TESTING
CNAS L0446

GRGTEST

Page 1 of 57

Verified code: 371594

Test Report

Report No.: E20230128179401-2

Customer: Lumi United Technology Co., Ltd

Address: Room 801-804, Building 1, Chongwen Park, Nanshan iPark, No. 3370, Liuxian Avenue, Fuguang Community, Taoyuan Residential District, Nanshan District, Shenzhen, China

Sample Name: Door and Window Sensor P2

Sample Model: DW-S02E

Receive Sample Date: Jan.30,2023

Test Date: Jan.31,2023 ~ Feb.21,2023

Reference Document: ETSI EN 300 328 V2.2.2 (2019-07)

Test Result: Pass

Prepared by: Chen Xiaocong

Reviewed by: Jiang Tao

Approved by: Zhao Zetian

GUANGZHOU GRG METROLOGY & TEST CO., LTD

Issued Date: 2023-02-25

GUANGZHOU GRG METROLOGY & TEST CO., LTD.

Address: No.163, Pingyun Road, West of Huangpu Avenue, Guangzhou, Guangdong, China

Tel: (+86) 400-602-0999 FAX: (+86) 020-38698685 Web: <http://www.grgtest.com>



Statement

1. The report is invalid without "special seal for inspection and testing"; some copies are invalid; The report is invalid if it is altered or missing; The report is invalid without the signature of the person who prepared, reviewed and approved it.
2. The sample information is provided by the client and responsible for its authenticity; The content of the report is only valid for the samples sent this time.
3. When there are reports in both Chinese and English, the Chinese version will prevail when the language problems are inconsistent.
4. If there is any objection concerning the report, please inform us within 15 days from the date of receiving the report.
5. Without the agreement of the laboratory, the client is not authorized to use the test results for unapproved propaganda.

----- The following blanks -----

TABLE OF CONTENTS

1.	TEST RESULT SUMMARY	6
2.	GENERAL DESCRIPTION OF EUT	7
2.1	APPLICANT INFORMATION	7
2.2	MANUFACTURER	7
2.3	BASIC DESCRIPTION OF EUT	7
2.4	TEST MODE	8
2.5	FREQUENCY BAND AND THE TEST FREQUENCY	8
2.6	DESCRIPTION OF ADAPTIVE EQUIPMENT	9
3.	LABORATORY	10
4.	ACCREDITATIONS	10
5.	MEASUREMENTS UNCERTAINTY	10
6.	EQUIPMENT AND TOOLS USED DURING TEST	11
6.1	TEST EQUIPMENT AND TOOLS	11
6.2	LOCAL SUPPORTIVE INSTRUMENTS	12
6.3	CONFIGURATION OF SYSTEM UNDER TEST	12
6.4	TEST SOFTWARE	12
7.	RADIO TECHNICAL REQUIREMENT SPECIFICATION	13
7.1	RF OUTPUT POWER	13
7.1.1	LIMIT	13
7.1.2	TEST CONFIGURATION	13
7.1.3	TEST PROCEDURES	13
7.1.4	TEST RESULTS	14
7.2	POWER SPECTRAL DENSITY	15
7.2.1	LIMIT	15
7.2.2	TEST CONFIGURATION	15
7.2.3	TEST PROCEDURES	15
7.2.4	TEST RESULTS	16
7.3	OCCUPIED CHANNEL BANDWIDTH	20
7.3.1	LIMIT	20
7.3.2	TEST CONFIGURATION	20
7.3.3	TEST PROCEDURES	20
7.3.4	TEST RESULTS	21
7.4	TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF-BAND DOMAIN	25
7.4.1	LIMIT	25
7.4.2	TEST CONFIGURATION	25
7.4.3	TEST PROCEDURES	25
7.4.4	TEST RESULTS	26
7.5	TRANSMITTER UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN	29
7.5.1	LIMIT	29
7.5.2	TEST CONFIGURATION	30
7.5.3	TEST PROCEDURES	31

7.5.4	DATA SAMPLE	31
7.5.5	TEST RESULTS	32
7.6	RECEIVER SPURIOUS EMISSIONS	40
7.6.1	LIMIT	40
7.6.2	TEST CONFIGURATION	41
7.6.3	TEST PROCEDURES	41
7.6.4	DATA SAMPLE	42
7.6.5	TEST RESULTS	43
7.7	RECEIVER BLOCKING	51
7.7.1	LIMIT	51
7.7.2	TEST CONFIGURATION	53
7.7.3	TEST PROCEDURES	53
7.7.4	TEST RESULTS	55
	APPENDIX A. PHOTOGRAPH OF THE TEST CONNECTION DIAGRAM	57
	APPENDIX B. PHOTOGRAPHS OF EUT	57

----- The following blanks -----

REPORT ISSUED HISTORY

Report Version	Report No.	Description	Compile Date
1.0	E20230128179401-2	Original Issue	2023-02-22

----- The following blanks -----

1. TEST RESULT SUMMARY

Test Item	Test mode	Test Requirement	Test Method	Class / Severity	Test Result
1. Transmitter Part					
RF Output Power	Mode 1	EN300 328 V2.2.2/ 4.3.2.2	EN300 328 V2.2.2/5.4.2.2.1	Meet requirements: EN300 328 V2.2.2/ 4.3.2.2	PASS
Power Spectral Density	Mode 1	EN300 328 V2.2.2/4.3.2.3	EN300 328 V2.2.2/5.4.3.2.1	Meet requirements: EN300 328 V2.2.2/4.3.2.3	PASS
Duty Cycle, Tx-sequence, Tx-gap	Mode 1	EN300 328 V2.2.2/4.3.2.4	EN300 328 V2.2.2/5.4.2.2.1	Meet requirements: EN300 328 V2.2.2/4.3.2.4	N/A ²⁾
Medium Utilisation (MU) factor	Mode 1	EN300 328 V2.2.2/ 4.3.2.5	EN300 328 V2.2.2/5.4.2.2	Meet requirements: EN300 328 V2.2.2/ 4.3.2.5	N/A ²⁾
Adaptivity	Mode 3	EN300 328 V2.2.2/ 4.3.2.6	EN300 328 V2.2.2/5.4.6.2.1	Meet requirements: EN300 328 V2.2.2/ 4.3.2.6	N/A ¹⁾
Occupied Channel Bandwidth	Mode 1	EN300 328 V2.2.2/ 4.3.2.7	EN300 328 V2.2.2/5.4.7.2.1	Meet requirements: EN300 328 V2.2.2/ 4.3.2.7	PASS
Transmitter unwanted emissions in the out-of-band domain	Mode 1	EN300 328 V2.2.2/ 4.3.2.8	EN300 328 V2.2.2/5.4.8.2.1	Meet requirements: EN300 328 V2.2.2/ 4.3.2.8	PASS
Transmitter unwanted emissions in the spurious domain	Mode 1	EN300 328 V2.2.2/ 4.3.2.9	EN300 328 V2.2.2/5.4.9.2.2	Meet requirements: EN300 328 V2.2.2/ 4.3.2.9	PASS
2. Receiver Part					
Receiver spurious emissions	Mode 2	EN300 328 V2.2.2/ 4.3.2.10	EN300 328 V2.2.2/5.4.10.2.2	Meet requirements: EN300 328 V2.2.2/ 4.3.2.10	PASS
Receiver Blocking	Mode 3	EN300 328 V2.2.2/ 4.3.2.11	EN300 328 V2.2.2/5.4.11.2.1	Meet requirements: EN300 328 V2.2.2/ 4.3.2.11	PASS

Note:

1. This item does not apply for equipment with a declared RF Output power level of less than 10dBm e.i.r.p, or for equipment when operating in a mode where the RF Output power is less than 10dBm e.i.r.p, the EUT power is less than 10dBm, so it is not applied.
2. It's apply to non-Adaptivity equipment or to adaptive FHSS equipment operating in a non-adaptive mode., the EUT is a adaptive equipment not operating in a non-adaptive mode, so it is not applied.

2. GENERAL DESCRIPTION OF EUT

2.1 APPLICANT INFORMATION

Name: Lumi United Technology Co., Ltd
Room 801-804, Building 1, Chongwen Park, Nanshan iPark, No. 3370, Liuxian Avenue, Fuguang Community, Taoyuan Residential District, Nanshan District, Shenzhen, China

2.2 MANUFACTURER

Name: Lumi United Technology Co., Ltd
Room 801-804, Building 1, Chongwen Park, Nanshan iPark, No. 3370, Liuxian Avenue, Fuguang Community, Taoyuan Residential District, Nanshan District, Shenzhen, China

2.3 BASIC DESCRIPTION OF EUT

Product Name: Door and Window Sensor P2
Product Model: DW-S02E
Adding Model: DW-S02D
Models Difference: DW-S02E & DW-S02D are the same on the board, schematic, hardware version, software version, structure and internal photos are same, only the model name is different.
Trade Name: Aqara
Power Supply: DC 3V power supplied by battery
Battery Specification: Model:CR123A
Norminal Voltage:3.0Vdc
Rated Capacity: 1400mAh
Frequency Band: 2402MHz - 2480MHz
Modulation Type: Bluetooth LE with 1M&2M:GFSK
Antenna Type: PIFA antenna
Antenna Gain: 1dBi
Sample submitting way: Provided by customer Sampling
Sample No: E20230128179401-0011, E20230128179401-0012
Hardware Version: X0
Software Version: 0.0.0.1
Note: All the tests were performed on the model DW-S02E.

----- The following blanks -----

2.4 TEST MODE

Test mode 1: BLE fixed transmitting mode

Test mode 2: BLE receiving mode

Test mode 3: BLE normal mode

2.5 FREQUENCY BAND AND THE TEST FREQUENCY

Channel	Frequency (MHz)	Channel	Frequency (MHz)
*00	2402	20	2442
01	2404	21	2444
02	2406	22	2446
03	2408	23	2448
04	2410	24	2450
05	2412	25	2452
06	2414	26	2454
07	2416	27	2456
08	2418	28	2458
09	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
*19	2440	*39	2480

* is the test frequency

----- The following blanks -----

2.6 DESCRIPTION OF ADAPTIVE EQUIPMENT

The type of the equipment	<input type="checkbox"/> FHSS	<input checked="" type="checkbox"/> Non-FHSS		
Adaptive / non-adaptive equipment	<input type="checkbox"/> Non-adaptive Equipment	<input checked="" type="checkbox"/> adaptive Equipment without the possibility to switch to a non-adaptive mode	<input type="checkbox"/>	adaptive Equipment which can also operate in a non-adaptive mode
The equipment has an implemented	<input type="checkbox"/> Frame Based equipment	<input checked="" type="checkbox"/> Load Based equipment	<input type="checkbox"/> non-LBT based DAA mechanism	<input type="checkbox"/> other
Device Class	<input type="checkbox"/> WIFI	<input checked="" type="checkbox"/> Bluetooth Low Energy (5.0)	<input type="checkbox"/> Bluetooth EDR/BR (5.0)	
WIFI Channel Bandwidth	<input type="checkbox"/> 20MHz	<input type="checkbox"/> 40MHz	<input type="checkbox"/> 80MHz	<input type="checkbox"/> 160MHz
Antenna Gain	<input checked="" type="checkbox"/> Antenna1 1dBi	<input type="checkbox"/> Antenna 2 dBi	<input type="checkbox"/> Antenna 3 dBi	<input type="checkbox"/> Antenna 4 dBi
Beamforming Gain	<input type="checkbox"/> Yes, dBi	<input checked="" type="checkbox"/>	No	
Extreme operating conditions	<input checked="" type="checkbox"/> Operating temperature range:	<input checked="" type="checkbox"/>	Min -10°C	<input checked="" type="checkbox"/> Max +50°C
Blocking	<input checked="" type="checkbox"/> PER	<input type="checkbox"/> The manufacturer may declare alternative performance criteria		
Geo-location capability supported by the equipment	<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> No		

The EUT is Receiver Category 2 equipment.

----- The following blanks -----

3. LABORATORY

The tests and measurements refer to this report were performed by Shenzhen EMC Laboratory of Guangzhou GRG Metrology & Test Co., Ltd.

Add. : No.1301 Guanguang Road Xinlan Community, Guanlan Street, Longhua District Shenzhen, 518110, People's Republic of China

P.C. : 518110

Telephone : 0755-61180008

Fax : 0755-61180008

4. ACCREDITATIONS

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA A2LA(Certificate#:2861.01)

China CNAS(L0446)

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

Canada ISED (Company Number: 24897, CAB identifier:CN0069)

USA FCC (Registration Number: 759402, Designation Number:CN1198)

Copies of granted accreditation certificates are available for downloading from our web site,
<http://www.grgtest.com>

5. MEASUREMENTS UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in ETSI EN TR 100 028-1 (i.15) and ETSI EN 100 028-2(i 8):

Measurement	Frequency	Uncertainty
Radiated Emission	Horizontal 30MHz~1000MHz	4.3dB
	1GHz~18GHz	5.6dB
	Vertical 30MHz~1000MHz	4.3dB
	1GHz~18GHz	5.6dB

Measurement	Uncertainty
RF frequency	6.0×10^{-6}
RF power conducted	0.78 dB
Occupied channel bandwidth	0.4dB
Unwanted emission, conducted	0.68 dB
Humidity	6 %
Temperature	2 °C

This uncertainty represents an expanded uncertainty factor of $k=2$.

6. EQUIPMENT AND TOOLS USED DURING TEST

6.1 TEST EQUIPMENT AND TOOLS

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Maximum transmit power & occupied channel bandwidth & Transmitter unwanted emissions in the out-of-band domain & Power Spectral density				
Simultaneous sampling DAQ	TONSCEND	JS0806-2	186060020	2023-07-24
High and low temperature humid heat test chamber	HOSON	HS01060SDF	191008401	2023-08-19
Pulse power sensor	TONSCEND	u2021A	I00641	2023-07-24
Spectrum Analyzer	Agilent	N9020A	MY50510140	2023-10-19
BT/WIFI System	TONSCEND	JS1120-3		
Transmitter unwanted emissions in the spurious domain & Receiver spurious emissions				
Bi-log Antenna	Schwarzbeck	VULB9163	01279	2023-03-15
Horn Antenna	Schwarzbeck	BBHA9120D	02499	2023-09-25
Amplifier	Tonscend	TAP037030	AP20E8060081	2023-05-08
Amplifier	Tonscend	TAP01018048	AP20E8060076	2023-05-05
Amplifier	Tonscend	TAP9E6343	AP20E806065	2023-05-08
Spectrum Analyzer	KEYSIGHT	N9010A	MY55370330	2023-10-19
Spectrum Analyzer	R&S	FSV3044	101184	2023-09-02
Test SW	tonscend	JS36-RSE/2.5.1.5		
Receiver Blocking				
Signal Generator	Anritsu	MG3694A	#050125	2023-08-16
Wideband radio Communication Tester	R&S	CMW500	144611-nC	2023-05-08
Test SW	tonscend	JS1120-3		

Note: The calibration interval of the above test instruments is 12 months.

6.2 LOCAL SUPPORTIVE INSTRUMENTS

Name of equipment	Manufacturer	Model	Serial number	Note
Notebook	LENOVO	TianYi 310-14ISK	MP18DLC6	/
Test board	/	/	/	/

No.	Cable Type	Qty.	Shielded Type	Ferrite Core(Qty.)	Length
1	DC cable	1	No	0	0.15m
2	DC cable	1	No	0	1.2m

Note: ⁽¹⁾The notebook is just used to produce fixed frequency transmitting.

6.3 CONFIGURATION OF SYSTEM UNDER TEST



6.4 TEST SOFTWARE

Software version	Test level
QCOM_V1.0	8.0

7. RADIO TECHNICAL REQUIREMENT SPECIFICATION

7.1 RF OUTPUT POWER

Test Requirement: EN300 328 V2.2.2/ 4.3.2.2

Test Method: EN300 328 V2.2.2/5.4.2.2.1


7.1.1 LIMIT

For adaptive equipment, the maximum RF output power shall be 20 dBm.

The maximum RF output power for non-adaptive equipment shall be declared by the manufacturer and shall not exceed 20 dBm. See clause 5.4.1 m). For non-adaptive equipment, the maximum RF output power shall be equal to or less than the value declared by the manufacturer.

This limit shall apply for any combination of power level and intended antenna assembly.

7.1.2 TEST CONFIGURATION

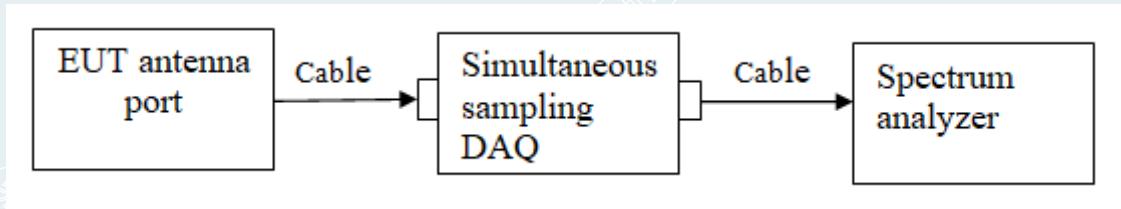

7.1.3 TEST PROCEDURES

Test procedure: Test procedure is according to Clause 5.3.2.2.1 of EN 300 328 V2.2.2

Test channel: 2402MHz, 2440MHz and 2480MHz for BLE

Test condition: Normal and extreme test conditions.

----- The following blanks -----

7.1.4 TEST RESULTS

Test environment: Normal condition: Yang Zhaoyun

Extreme test conditions: Low Temp: -10°C

High Temp: +50°C

Test Engineer: Yang Zhaoyun

Test Date: 2023-01-31

Test Condition	Test mode	Antenna	Frequency [MHz]	EIRP[dBm]	Limit[dBm]	Verdict
NTNV	BLE_1M	Ant1	2402	9.42	20	PASS
			2440	9.45	20	PASS
			2480	9.17	20	PASS
LTNV	BLE_1M	Ant1	2402	9.38	20	PASS
			2440	9.22	20	PASS
			2480	9.21	20	PASS
HTNV	BLE_1M	Ant1	2402	9.40	20	PASS
			2440	9.39	20	PASS
			2480	9.17	20	PASS

Test Condition	Test mode	Antenna	Frequency [MHz]	EIRP[dBm]	Limit[dBm]	Verdict
NTNV	BLE_2M	Ant1	2402	9.31	20	PASS
			2440	9.23	20	PASS
			2480	9.12	20	PASS
LTNV	BLE_2M	Ant1	2402	9.32	20	PASS
			2440	9.31	20	PASS
			2480	9.36	20	PASS
HTNV	BLE_2M	Ant1	2402	9.25	20	PASS
			2440	9.50	20	PASS
			2480	9.12	20	PASS

----- The following blanks -----

7.2 POWER SPECTRAL DENSITY

Test Requirement: EN300 328 V2.2.2/4.3.2.3


Test Method: EN300 328 V2.2.2/5.4.3.2.1

7.2.1 LIMIT

This requirement applies to all types of equipment using wide band modulations other than FHSS.

For equipment using wide band modulations other than FHSS, the maximum Power Spectral Density is limited to 10 dBm per MHz.

7.2.2 TEST CONFIGURATION

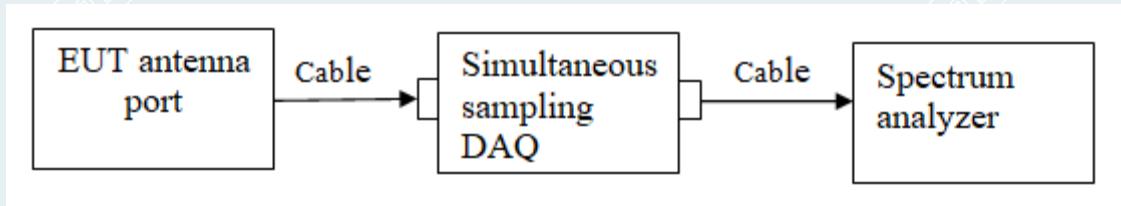

7.2.3 TEST PROCEDURES

Test condition: Normal test conditions

Test channel: 2402MHz, 2440MHz and 2480MHz for BLE

Test procedure: Test procedure is according to Clause 5.4.3.2.1 of EN 300 328 V2.2.2

Remark: /

----- The following blanks -----


7.2.4 TEST RESULTS

Test environment: Normal condition:
Environment: 22.5°C/58%RH/101.0kPa
Test Engineer: Yang Zhaoyun
Test Date: 2023-01-31


Test mode	Antenna	Frequency [MHz]	PSD[dBm/MHz]	Limit[dBm/MHz]	Verdict
BLE_1M	Ant1	2402	9.35	10	PASS
		2440	9.38	10	PASS
		2480	9.09	10	PASS
BLE_2M	Ant1	2402	8.29	10	PASS
		2440	8.21	10	PASS
		2480	8.09	10	PASS

----- The following blanks -----


Test screenshots

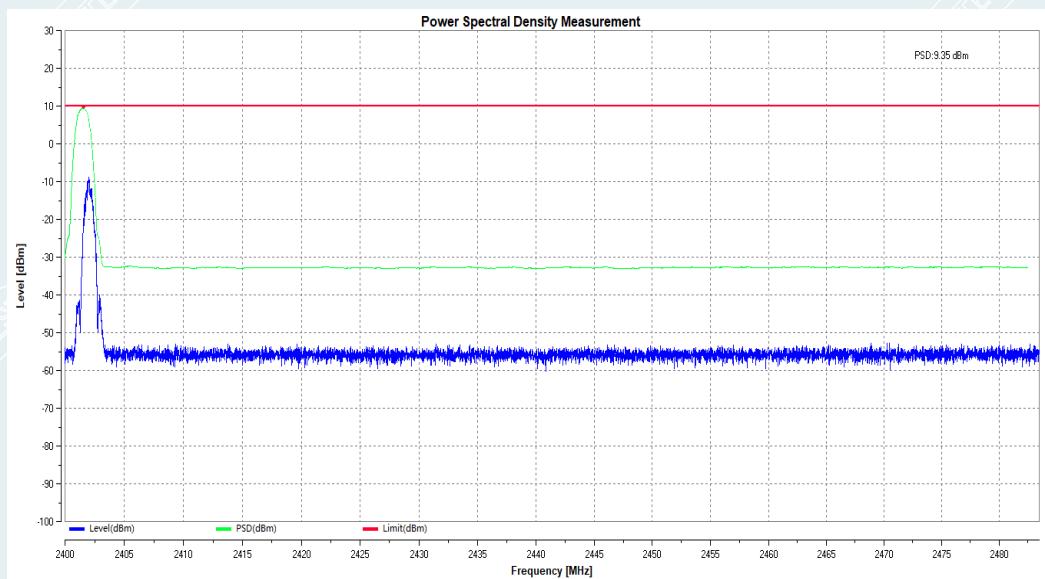


Lowest Frequency: 1M_2402MHz

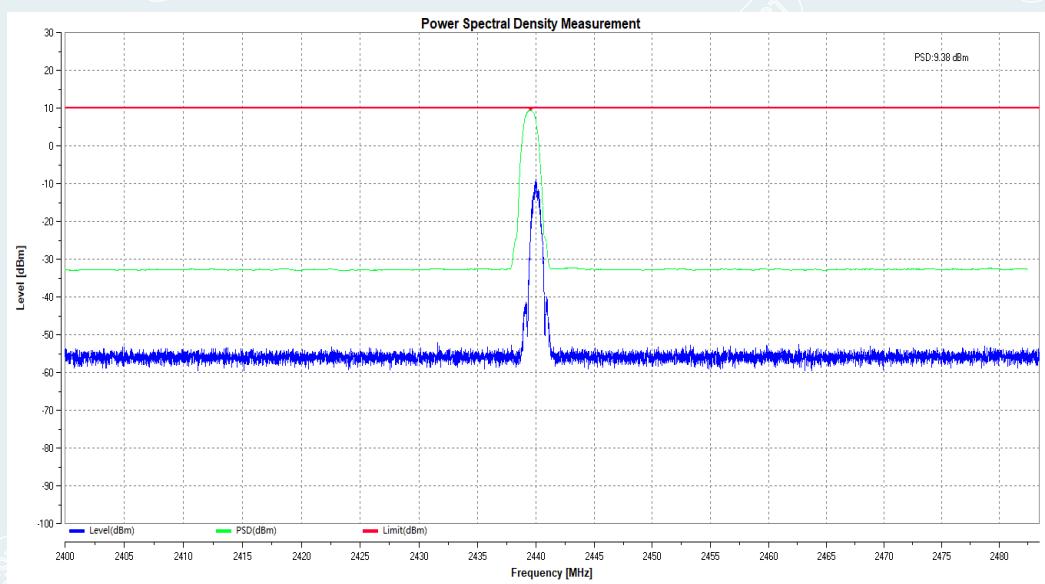


Middle Frequency: 1M_2440MHz

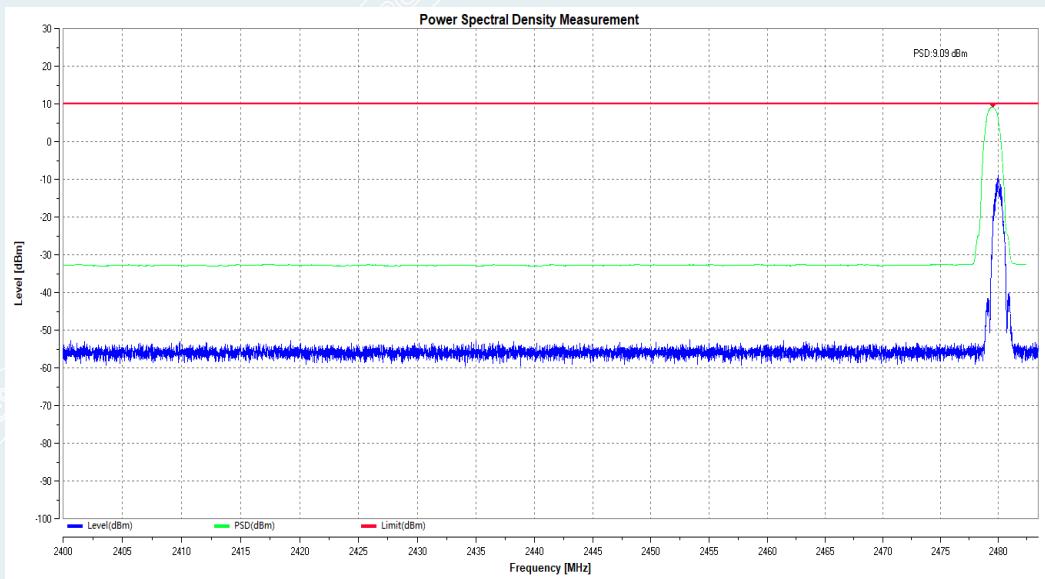


Highest Frequency: 1M_2480MHz

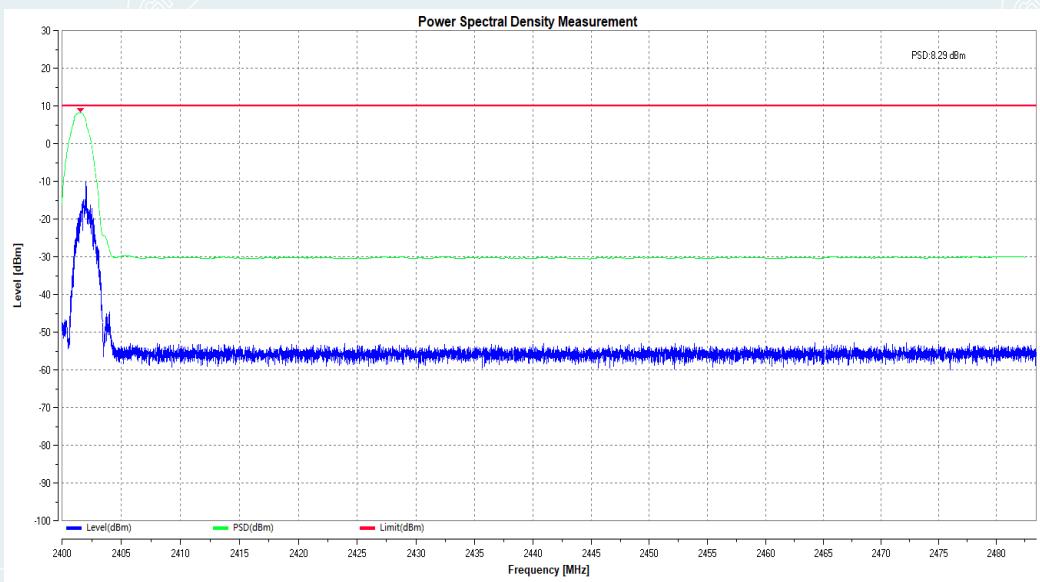

Lowest Frequency: 2M_2402MHz

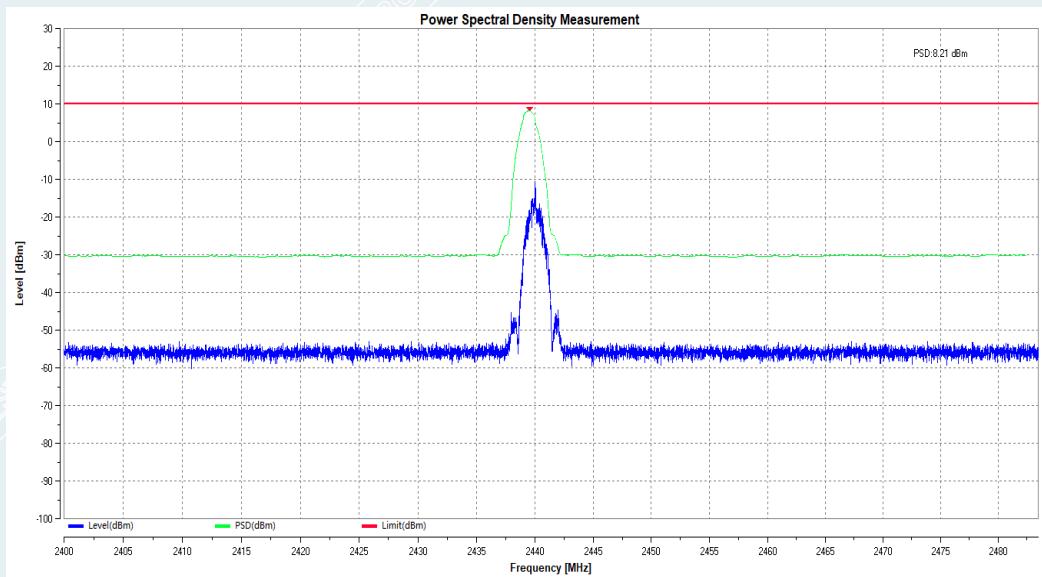

Middle Frequency: 2M_2440MHz

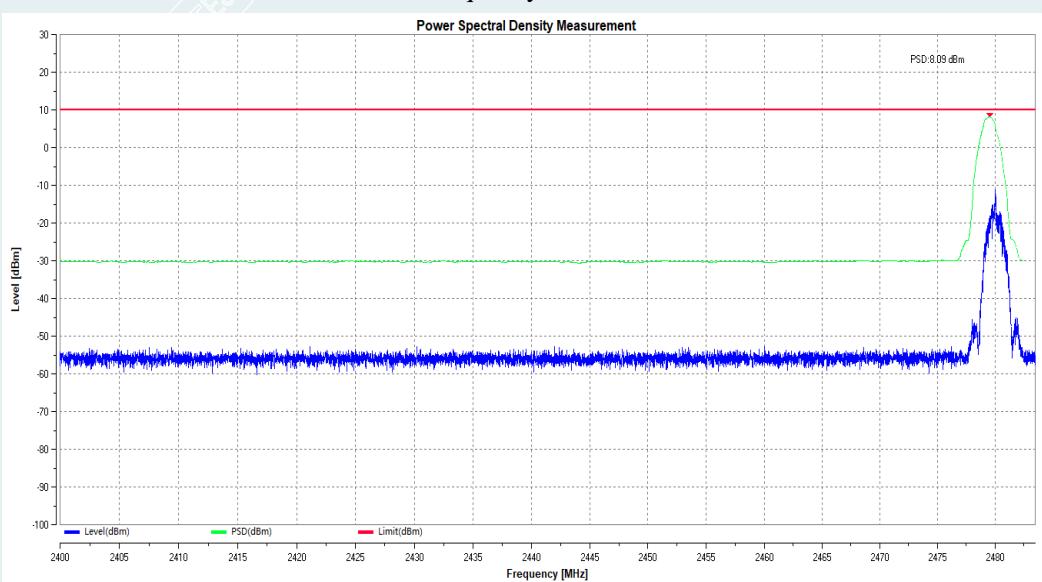

Highest Frequency: 2M_2480MHz

7.3 OCCUPIED CHANNEL BANDWIDTH

Test Requirement: EN300 328 V2.2.2/ 4.3.2.7

Test Method: EN300 328 V2.2.2/5.4.7.2.1

7.3.1 LIMIT

This requirement applies to all types of non-FHSS equipment.


The Occupied Channel Bandwidth shall fall completely within the band given in table 2.

In addition, for non-adaptive equipment using wide band modulations other than FHSS and with e.i.r.p. greater than 10 dBm, the occupied channel bandwidth shall be less than 20 MHz.

Table 2: Service frequency bands

	Service frequency bands
Transmit	2 400 MHz to 2 483,5 MHz
Receive	2 400 MHz to 2 483,5 MHz

7.3.2 TEST CONFIGURATION

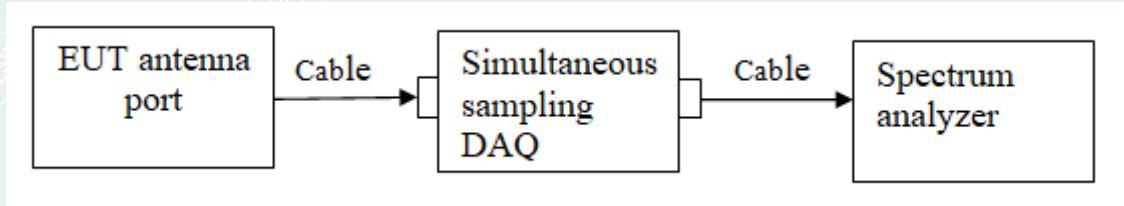

7.3.3 TEST PROCEDURES

Test condition: Normal test conditions.

Test channel: 2402MHz, 2440MHz and 2480MHz for BLE

Test procedure: Test procedure is according to Clause 5.4.7.2.1 of EN 300 328 V2.2.2

7.3.4 TEST RESULTS

Test environment: Normal condition:
Environment: 22.5°C/58%RH/101.0kPa
Test Engineer: Yang Zhaoyun
Test Date: 2023-01-31

Test Mode	Frequency [MHz]	OCB[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	2402	1.0258	2401.5234	2402.5492	2400 to 2483.5	PASS
	2440	1.0255	2439.5284	2440.5539	2400 to 2483.5	PASS
	2480	1.0286	2479.5277	2480.5563	2400 to 2483.5	PASS
BLE_2M	2402	2.0265	2401.0391	2403.0656	2400 to 2483.5	PASS
	2440	2.0270	2439.0389	2441.0659	2400 to 2483.5	PASS
	2480	2.0314	2479.0354	2481.0668	2400 to 2483.5	PASS

----- The following blanks -----

Test screenshots





Highest Frequency: 1M_2480MHz



Lowest Frequency: 2M_2402MHz



Middle Frequency: 2M_2440MHz



Highest Frequency: 2M_2480MHz

7.4 TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF-BAND DOMAIN

Test Requirement: EN300 328 V2.2.2/ 4.3.2.8

Test Method: EN300 328 V2.2.2/5.4.8.2.1

7.4.1 LIMIT

This requirement applies to all types of FHSS equipment and all types of non-FHSS equipment.

The transmitter unwanted emissions in the out-of-band domain but outside the allocated band, shall not exceed the values provided by the mask in figure 3.

Within the band specified in table 3, the Out-of-band emissions are fulfilled by compliance with the Occupied Channel Bandwidth requirement in clause 6.10.1.1 and 6.10.1.2.


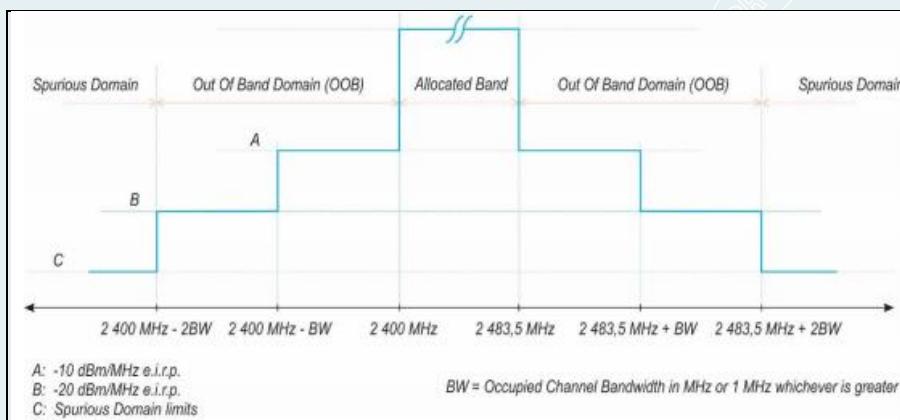


Figure 3: Transmit mask

7.4.2 TEST CONFIGURATION

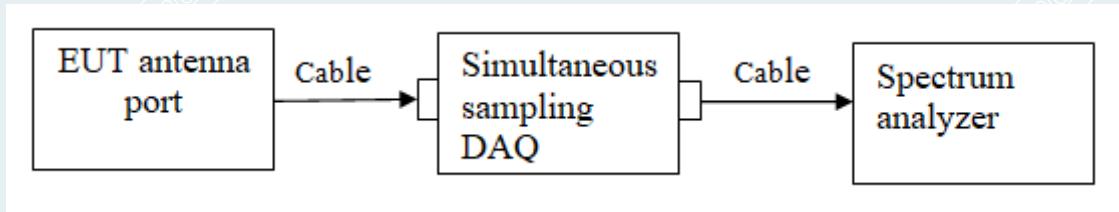

7.4.3 TEST PROCEDURES

Test condition: Normal test conditions.

Test channel: 2402MHz,2480MHz for BLE

Test procedure: Test procedure is according to Clause 5.4.8.2.1 of EN 300 328 V2.2.2

7.4.4 TEST RESULTS


Test environment: Normal condition:
 Environment: 22.5°C/58%RH/101.0kPa
 Test Engineer: Yang Zhaoyun
 Test Date: 2023-01-31

Test mode	Antenna	Frequency [MHz]	Frequency[MHz]	Level[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	2398.4484	-21.98	-20.00	PASS
			2398.4742	-22.15	-20.00	PASS
			2399.4742	-28.28	-10.00	PASS
			2399.5	-28.27	-10.00	PASS
			2484	-46.06	-10.00	PASS
			2484.0258	-45.62	-10.00	PASS
			2485.0258	-45.57	-20.00	PASS
			2485.0516	-45.67	-20.00	PASS
		2480	2398.4428	-45.94	-20.00	PASS
			2398.4714	-46.18	-20.00	PASS
			2399.4714	-43.52	-10.00	PASS
			2399.5	-43.96	-10.00	PASS
			2484	-20.55	-10.00	PASS
			2484.0286	-20.47	-10.00	PASS
			2485.0286	-28.36	-20.00	PASS
			2485.0572	-28.87	-20.00	PASS
BLE_2M	Ant1	2402	2396.447	-34.95	-20.00	PASS
			2396.4735	-33.74	-20.00	PASS
			2397.4735	-24.16	-20.00	PASS
			2398.4735	-22.15	-10.00	PASS
			2398.5	-22.37	-10.00	PASS
			2399.5	-25.83	-10.00	PASS
			2484	-45.61	-10.00	PASS
			2485	-45.53	-10.00	PASS
			2485.0265	-45.08	-10.00	PASS
			2486.0265	-43.67	-20.00	PASS
		2480	2487.0265	-44.63	-20.00	PASS
			2487.053	-45.97	-20.00	PASS
			2396.4372	-44.12	-20.00	PASS
			2396.4686	-43.13	-20.00	PASS
			2397.4686	-45.94	-20.00	PASS
			2398.4686	-44.70	-10.00	PASS


			2484	-20.51	-10.00	PASS
			2485	-28.07	-10.00	PASS
			2485.0314	-28.33	-10.00	PASS
			2486.0314	-35.72	-20.00	PASS
			2487.0314	-32.37	-20.00	PASS
			2487.0628	-31.89	-20.00	PASS

Test screenshots

BLE_1M (2402MHz)

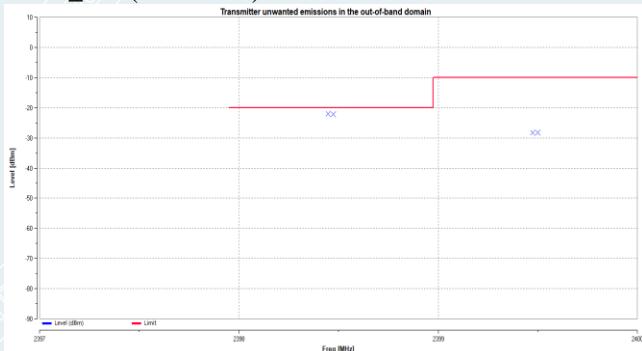


Left side of working frequency band

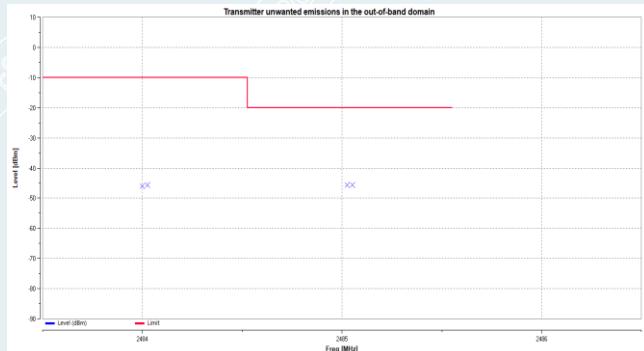


Right side of working frequency band


BLE_1M (2480MHz)

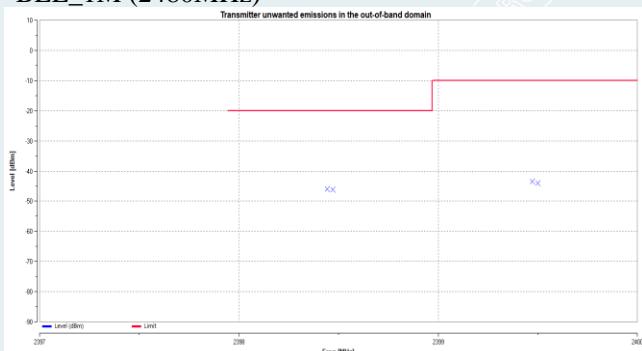


Left side of working frequency band

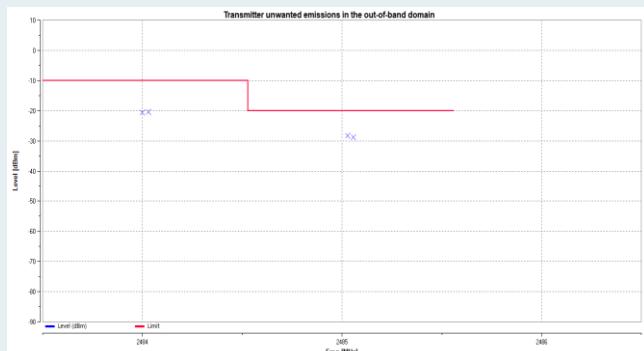


Right side of working frequency band

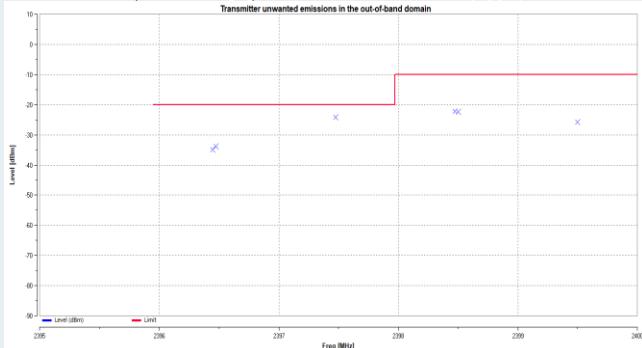BLE_2M (2402MHz)


Left side of working frequency band

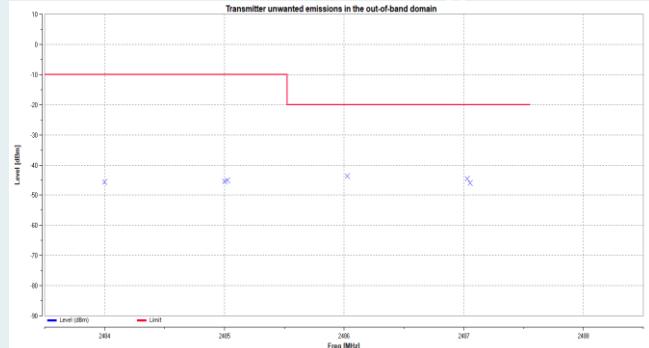

Right side of working frequency band

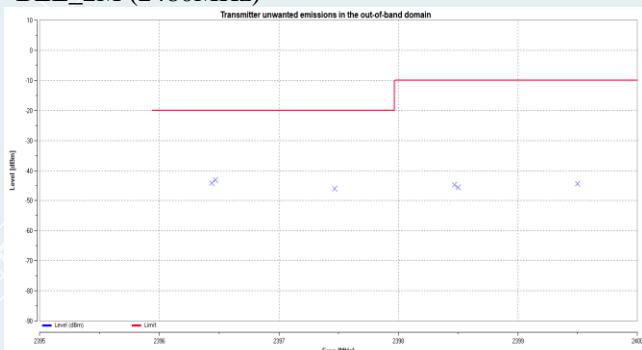BLE_2M (2480MHz)

Left side of working frequency band

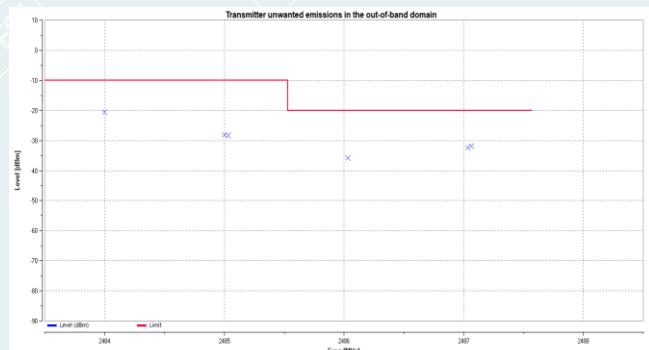

Right side of working frequency band

----- The following blanks -----

7.5 TRANSMITTER UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN

Test Requirement: EN300 328 V2.2.2/ 4.3.2.9

Test Method: EN300 328 V2.2.2/5.4.9.2.2

7.5.1 LIMIT

This requirement applies to all types of non-FHSS equipment.

The transmitter unwanted emissions in the spurious domain shall not exceed the values given in table 2. In case of equipment with antenna connectors, these limits apply to emissions at the antenna port (conducted). For emissions radiated by the cabinet or emissions radiated by integral antenna equipment (without antenna connectors), these limits are e.r.p. for emissions up to 1 GHz and as e.i.r.p. for emissions above 1 GHz.


Table 2: Transmitter limits for spurious emissions

Frequency range	Maximum power	Bandwidth
30 MHz to 47 MHz	-36 dBm	100 kHz
47 MHz to 74 MHz	-54 dBm	100 kHz
74 MHz to 87,5 MHz	-36 dBm	100 kHz
87,5 MHz to 118 MHz	-54 dBm	100 kHz
118 MHz to 174 MHz	-36 dBm	100 kHz
174 MHz to 230 MHz	-54 dBm	100 kHz
230 MHz to 470 MHz	-36 dBm	100 kHz
470 MHz to 694 MHz	-54 dBm	100 kHz
694 MHz to 1 GHz	-36 dBm	100 kHz
1 GHz to 12,75 GHz	-30 dBm	1 MHz


----- The following blanks -----

7.5.2 TEST CONFIGURATION

30MHz-1000MHz

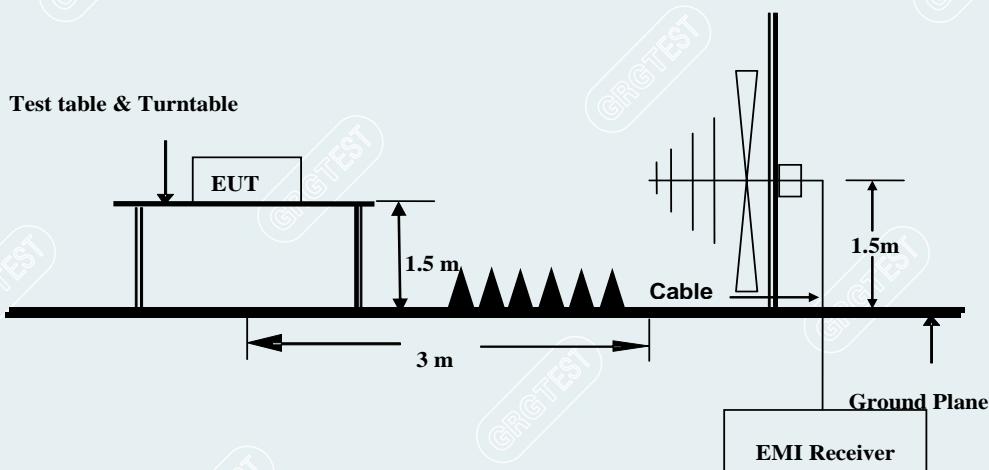

1000MHz~12750MHz

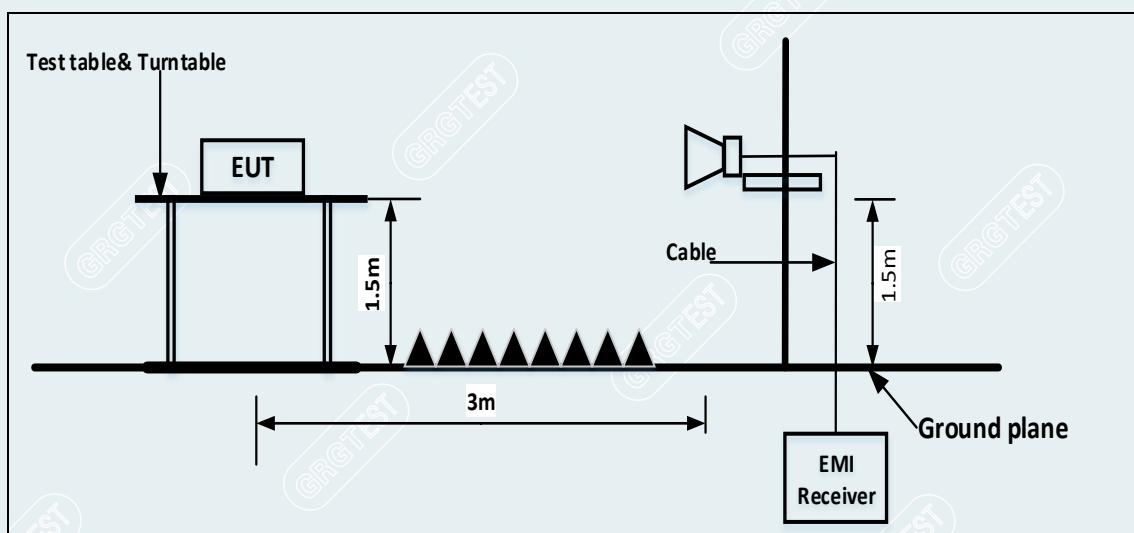

7.5.3 TEST PROCEDURES

- Test condition: Normal test conditions.
- Test channel: Lowest channel, Highest channel
- Test procedure: Test procedure is according to Clause 5.4.9.2.1 of EN 300 328 V2.2.2
- Remark: /

7.5.4 DATA SAMPLE


Frequency [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB/m]	Detector	Polarity
XXX	-49.71	-57.90	-30.00	27.90	-8.19	RMS	Horizontal

- Frequency (MHz) = Emission frequency in MHz
- Reading (dBm) = Uncorrected Analyzer / Receiver reading
- Correct Factor (dB/m) = Antenna factor + Cable loss – Amplifier gain
- Result (dBm) = Reading (dBm) + Corr. Factor (dB/m)
- Limit (dBm) = Limit stated in standard
- Margin (dB) = Result (dBm) – Limit(dBm)
- RMS = Root Mean Square

----- The following blanks -----


7.5.5 TEST RESULTS

Project No	E20230128179401	EUT:	Door and Window Sensor P2
Model:	DW-S02E	Sample No:	E20230128179401-0012
Mode:	TX BLE 1M_2402MHz	Voltage:	DC 3V
Environment:	22.3°C/56%RH/101.0kPa	Engineer:	Zhang Qiannng
Test Date:	2023-02-01	/	/

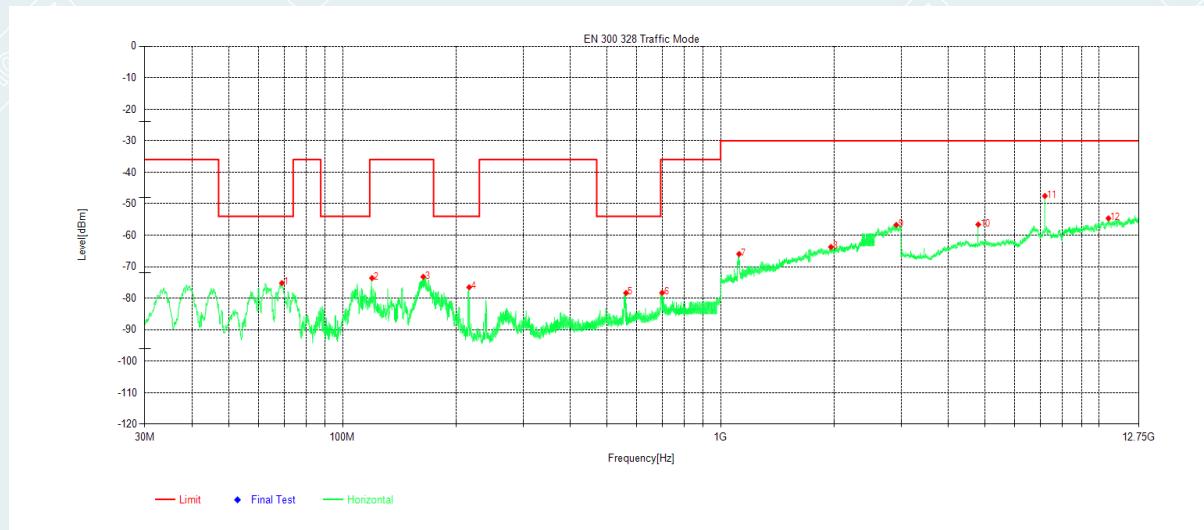

Suspected Data List								
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	69.091	-54.37	-75.20	-54.00	21.20	-20.83	RMS	Horizontal
2	119.628	-55.11	-73.60	-36.00	37.60	-18.49	RMS	Horizontal
3	163.472	-53.47	-73.19	-36.00	37.19	-19.72	RMS	Horizontal
4	216.24	-59.19	-76.51	-54.00	22.51	-17.32	RMS	Horizontal
5	561.948	-69.26	-78.32	-54.00	24.32	-9.06	RMS	Horizontal
6	700.367	-71.79	-78.27	-36.00	42.27	-6.48	RMS	Horizontal
7	1119.2	-63.90	-65.96	-30.00	35.96	-2.06	RMS	Horizontal
8	1957.4	-70.53	-63.72	-30.00	33.72	6.81	RMS	Horizontal
9	2914.8	-69.96	-56.72	-30.00	26.72	13.24	RMS	Horizontal
10	4803.75	-54.60	-56.59	-30.00	26.59	-1.99	RMS	Horizontal
11	7206.15	-52.51	-47.53	-30.00	17.53	4.98	RMS	Horizontal
12	10617.67	-66.11	-54.64	-30.00	24.64	11.47	RMS	Horizontal


Project No	E20230128179401	EUT:	Door and Window Sensor P2
Model:	DW-S02E	Sample No:	E20230128179401-0012
Mode:	TX BLE 1M_2402MHz	Voltage:	DC 3V
Environment:	22.3°C/56%RH/101.0kPa	Engineer:	Zhang Qiannng
Test Date:	2023-02-01	/	/

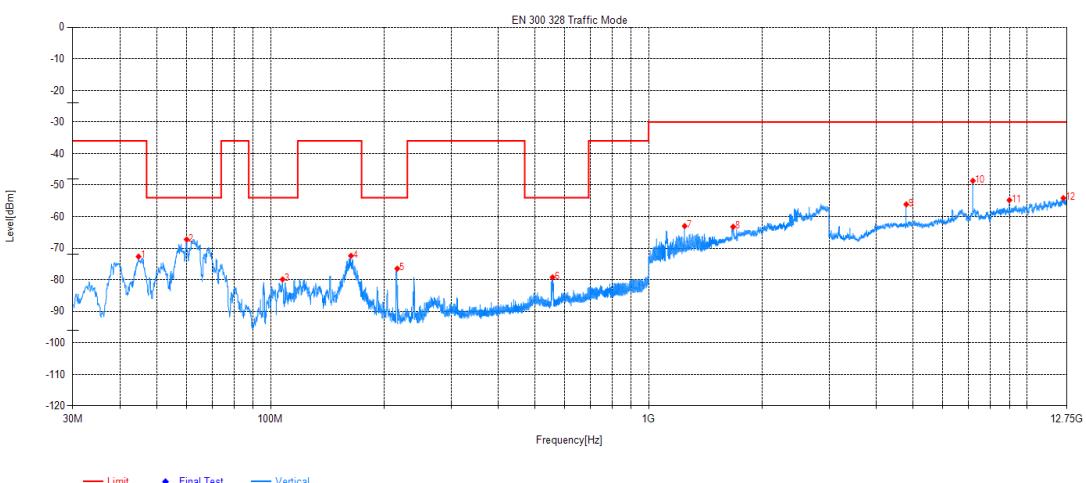

Suspected Data List


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	44.744	-58.91	-72.64	-36.00	36.64	-13.73	RMS	Vertical
2	59.973	-54.71	-67.21	-54.00	13.21	-12.50	RMS	Vertical
3	107.6	-60.10	-79.89	-54.00	25.89	-19.79	RMS	Vertical
4	163.181	-54.68	-72.42	-36.00	36.42	-17.74	RMS	Vertical
5	216.337	-58.95	-76.47	-54.00	22.47	-17.52	RMS	Vertical
6	557.001	-69.65	-79.24	-54.00	25.24	-9.59	RMS	Vertical
7	1245.6	-63.93	-62.98	-30.00	32.98	0.95	RMS	Vertical
8	1672.4	-68.08	-63.21	-30.00	33.21	4.87	RMS	Vertical
9	4803.75	-54.33	-56.11	-30.00	26.11	-1.78	RMS	Vertical
10	7205.175	-53.56	-48.63	-30.00	18.63	4.93	RMS	Vertical
11	9000.15	-62.84	-54.77	-30.00	24.77	8.07	RMS	Vertical
12	12503.32	-68.95	-54.12	-30.00	24.12	14.83	RMS	Vertical

Project No	E20230128179401	EUT:	Door and Window Sensor P2
Model:	DW-S02E	Sample No:	E20230128179401-0012
Mode:	TX BLE 1M_2480MHz	Voltage:	DC 3V
Environment:	22.3°C/56%RH/101.0kPa	Engineer:	Zhang Qiannng
Test Date:	2023-02-01	/	/

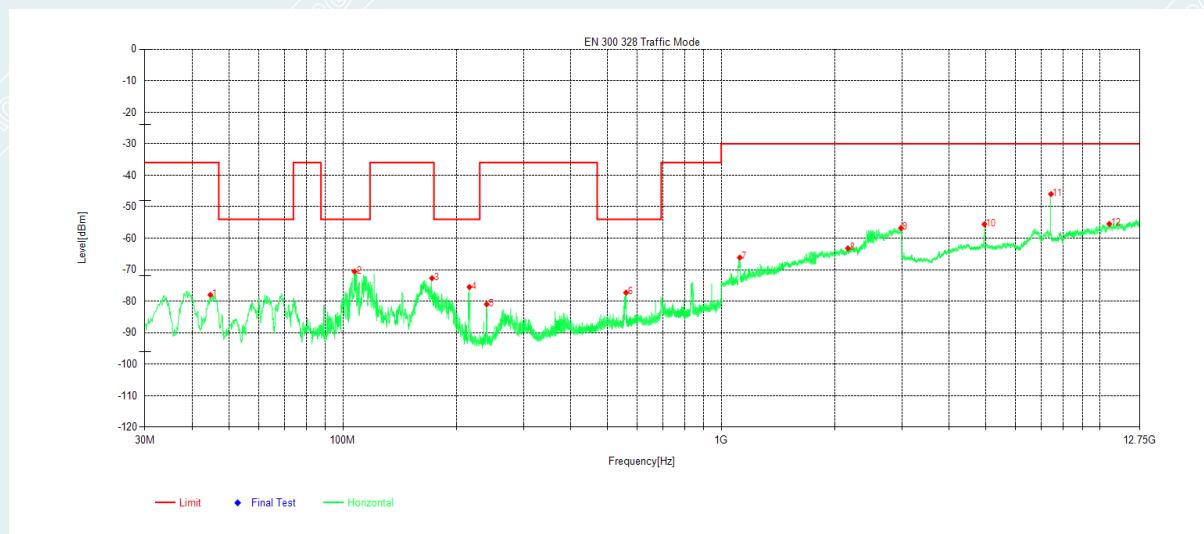

Suspected Data List								
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	44.647	-62.72	-77.99	-36.00	41.99	-15.27	RMS	Horizontal
2	107.406	-53.25	-70.58	-54.00	16.58	-17.33	RMS	Horizontal
3	172.008	-53.45	-72.67	-36.00	36.67	-19.22	RMS	Horizontal
4	216.046	-58.19	-75.51	-54.00	21.51	-17.32	RMS	Horizontal
5	240.005	-64.69	-80.98	-36.00	44.98	-16.29	RMS	Horizontal
6	560.202	-68.14	-77.30	-54.00	23.30	-9.16	RMS	Horizontal
7	1119.6	-64.08	-66.12	-30.00	36.12	-2.04	RMS	Horizontal
8	2161	-71.06	-63.21	-30.00	33.21	7.85	RMS	Horizontal
9	2984.4	-70.30	-56.75	-30.00	26.75	13.55	RMS	Horizontal
10	4959.75	-54.53	-55.56	-30.00	25.56	-1.03	RMS	Horizontal
11	7440.15	-50.83	-45.99	-30.00	15.99	4.84	RMS	Horizontal
12	10605.97	-67.05	-55.44	-30.00	25.44	11.61	RMS	Horizontal


Project No	E20230128179401	EUT:	Door and Window Sensor P2
Model:	DW-S02E	Sample No:	E20230128179401-0012
Mode:	TX BLE 1M_2480MHz	Voltage:	DC 3V
Environment:	22.3°C/56%RH/101.0kPa	Engineer:	Zhang Qiannng
Test Date:	2023-02-01	/	/

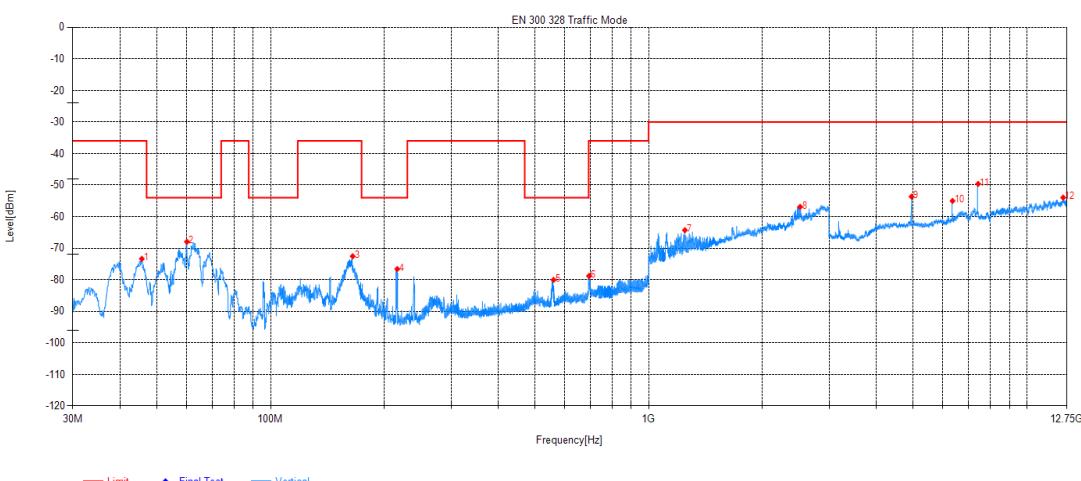

Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	45.617	-59.67	-73.35	-36.00	37.35	-13.68	RMS	Vertical
2	60.07	-55.39	-67.93	-54.00	13.93	-12.54	RMS	Vertical
3	164.83	-54.75	-72.54	-36.00	36.54	-17.79	RMS	Vertical
4	216.337	-59.08	-76.60	-54.00	22.60	-17.52	RMS	Vertical
5	560.299	-70.51	-80.03	-54.00	26.03	-9.52	RMS	Vertical
6	695.614	-72.31	-78.79	-36.00	42.79	-6.48	RMS	Vertical
7	1247.4	-65.12	-64.29	-30.00	34.29	0.83	RMS	Vertical
8	2516.2	-68.22	-56.90	-30.00	26.90	11.32	RMS	Vertical
9	4959.75	-52.74	-53.64	-30.00	23.64	-0.90	RMS	Vertical
10	6365.7	-56.56	-55.01	-30.00	25.01	1.55	RMS	Vertical
11	7440.15	-54.55	-49.63	-30.00	19.63	4.92	RMS	Vertical
12	12492.6	-68.65	-53.94	-30.00	23.94	14.71	RMS	Vertical


Project No	E20230128179401	EUT:	Door and Window Sensor P2
Model:	DW-S02E	Sample No:	E20230128179401-0012
Mode:	TX BLE 2M_2402MHz	Voltage:	DC 3V
Environment:	22.3°C/56%RH/101.0kPa	Engineer:	Zhang Qianng
Test Date:	2023-02-01	/	/

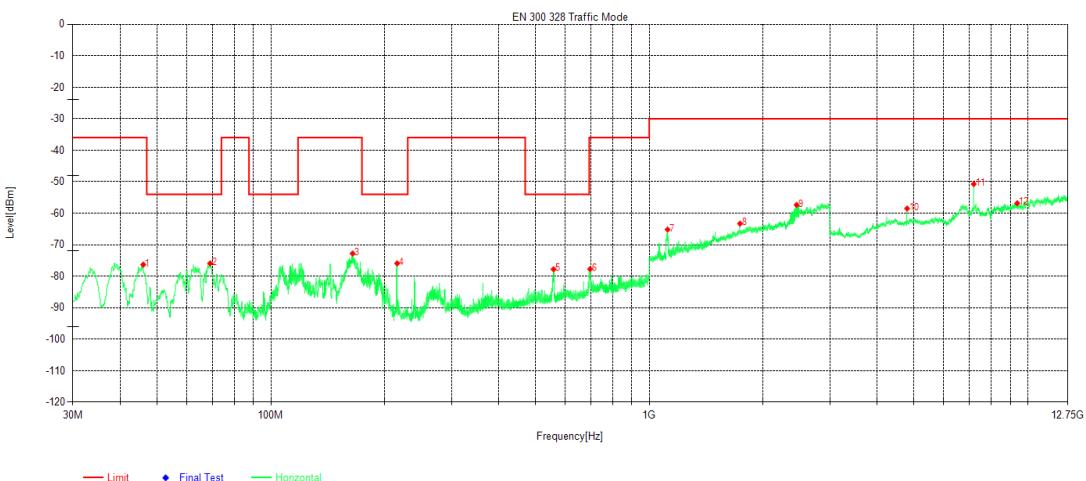

Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	46.005	-60.63	-76.32	-36.00	40.32	-15.69	RMS	Horizontal
2	69.091	-55.10	-75.93	-54.00	21.93	-20.83	RMS	Horizontal
3	164.442	-53.12	-72.79	-36.00	36.79	-19.67	RMS	Horizontal
4	215.658	-58.59	-75.92	-54.00	21.92	-17.33	RMS	Horizontal
5	558.262	-68.58	-77.80	-54.00	23.80	-9.22	RMS	Horizontal
6	697.651	-71.28	-77.75	-36.00	41.75	-6.47	RMS	Horizontal
7	1117.8	-63.01	-65.17	-30.00	35.17	-2.16	RMS	Horizontal
8	1737.8	-69.34	-63.30	-30.00	33.30	6.04	RMS	Horizontal
9	2450.6	-68.60	-57.36	-30.00	27.36	11.24	RMS	Horizontal
10	4803.75	-56.51	-58.50	-30.00	28.50	-1.99	RMS	Horizontal
11	7207.125	-55.70	-50.73	-30.00	20.73	4.97	RMS	Horizontal
12	9386.25	-65.74	-56.82	-30.00	26.82	8.92	RMS	Horizontal


Project No	E20230128179401	EUT:	Door and Window Sensor P2
Model:	DW-S02E	Sample No:	E20230128179401-0012
Mode:	TX BLE 2M_2402MHz	Voltage:	DC 3V
Environment:	22.3°C/56%RH/101.0kPa	Engineer:	Zhang Qiannng
Test Date:	2023-02-01	/	/

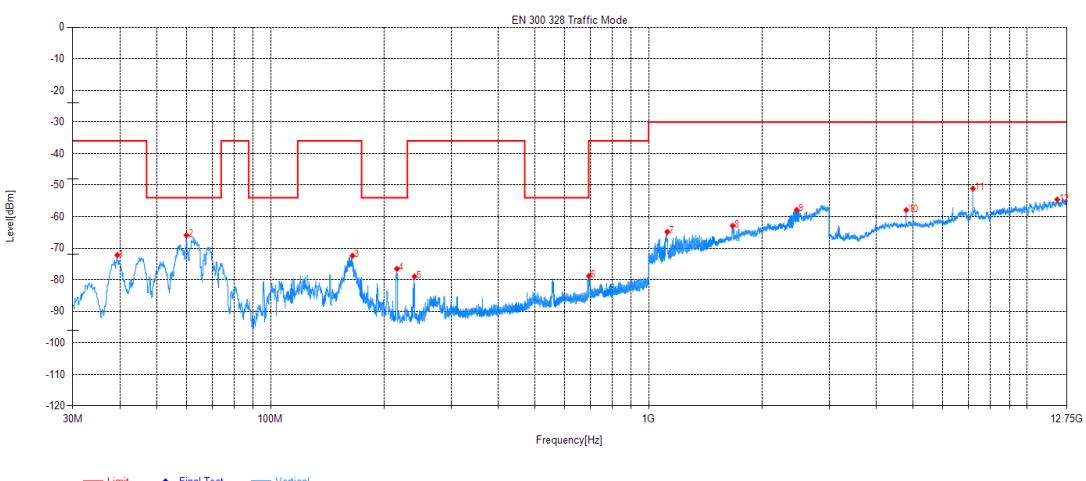

Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	39.312	-57.91	-72.18	-36.00	36.18	-14.27	RMS	Vertical
2	59.876	-53.37	-65.88	-54.00	11.88	-12.51	RMS	Vertical
3	164.636	-54.58	-72.36	-36.00	36.36	-17.78	RMS	Vertical
4	215.755	-59.01	-76.53	-54.00	22.53	-17.52	RMS	Vertical
5	240.296	-63.48	-78.95	-36.00	42.95	-15.47	RMS	Vertical
6	695.226	-72.30	-78.78	-36.00	42.78	-6.48	RMS	Vertical
7	1120.2	-63.20	-64.79	-30.00	34.79	-1.59	RMS	Vertical
8	1668.4	-67.68	-62.87	-30.00	32.87	4.81	RMS	Vertical
9	2462.8	-69.57	-57.84	-30.00	27.84	11.73	RMS	Vertical
10	4803.75	-56.15	-57.93	-30.00	27.93	-1.78	RMS	Vertical
11	7207.125	-56.01	-51.09	-30.00	21.09	4.92	RMS	Vertical
12	12044.1	-67.99	-54.57	-30.00	24.57	13.42	RMS	Vertical


Project No	E20230128179401	EUT:	Door and Window Sensor P2
Model:	DW-S02E	Sample No:	E20230128179401-0012
Mode:	TX BLE 2M_2480MHz	Voltage:	DC 3V
Environment:	22.3°C/56%RH/101.0kPa	Engineer:	Zhang Qiannng
Test Date:	2023-02-01	/	/

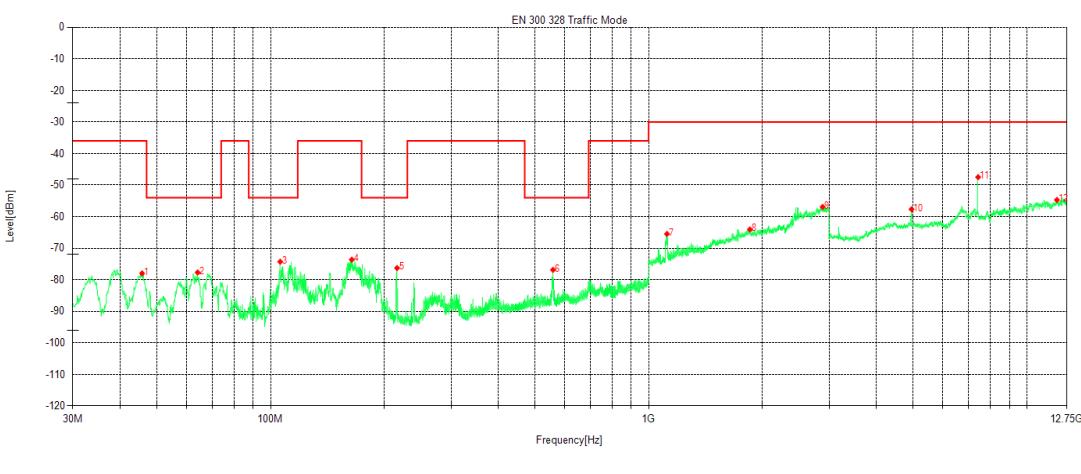

Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	45.714	-62.39	-77.98	-36.00	41.98	-15.59	RMS	Horizontal
2	64.144	-58.31	-77.69	-54.00	23.69	-19.38	RMS	Horizontal
3	106.048	-57.03	-74.27	-54.00	20.27	-17.24	RMS	Horizontal
4	163.957	-53.92	-73.62	-36.00	37.62	-19.70	RMS	Horizontal
5	216.046	-58.96	-76.28	-54.00	22.28	-17.32	RMS	Horizontal
6	558.456	-67.65	-76.86	-54.00	22.86	-9.21	RMS	Horizontal
7	1118.4	-63.36	-65.48	-30.00	35.48	-2.12	RMS	Horizontal
8	1852.8	-70.93	-64.05	-30.00	34.05	6.88	RMS	Horizontal
9	2885	-69.84	-56.92	-30.00	26.92	12.92	RMS	Horizontal
10	4958.775	-56.62	-57.65	-30.00	27.65	-1.03	RMS	Horizontal
11	7440.15	-52.29	-47.45	-30.00	17.45	4.84	RMS	Horizontal
12	12020.7	-67.74	-54.68	-30.00	24.68	13.06	RMS	Horizontal

Project No	E20230128179401	EUT:	Door and Window Sensor P2
Model:	DW-S02E	Sample No:	E20230128179401-0012
Mode:	TX BLE 2M_2480MHz	Voltage:	DC 3V
Environment:	22.3°C/56%RH/101.0kPa	Engineer:	Zhang Qiannng
Test Date:	2023-02-01	/	/

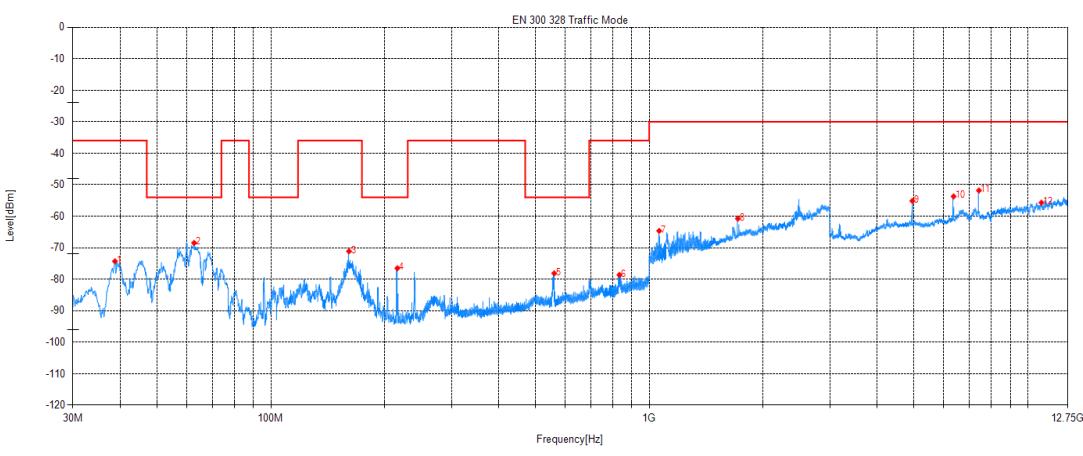

Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	38.73	-59.82	-74.30	-36.00	38.30	-14.48	RMS	Vertical
2	62.689	-54.50	-68.46	-54.00	14.46	-13.96	RMS	Vertical
3	160.95	-53.45	-71.14	-36.00	35.14	-17.69	RMS	Vertical
4	215.949	-58.98	-76.50	-54.00	22.50	-17.52	RMS	Vertical
5	560.59	-68.62	-78.12	-54.00	24.12	-9.50	RMS	Vertical
6	833.742	-73.85	-78.62	-36.00	42.62	-4.77	RMS	Vertical
7	1062.2	-62.01	-64.65	-30.00	34.65	-2.64	RMS	Vertical
8	1715.2	-66.61	-60.74	-30.00	30.74	5.87	RMS	Vertical
9	4959.75	-54.24	-55.14	-30.00	25.14	-0.90	RMS	Vertical
10	6375.45	-55.30	-53.71	-30.00	23.71	1.59	RMS	Vertical
11	7439.175	-56.76	-51.82	-30.00	21.82	4.94	RMS	Vertical
12	10881.9	-67.23	-55.69	-30.00	25.69	11.54	RMS	Vertical

7.6 RECEIVER SPURIOUS EMISSIONS

Test Requirement: EN300 328 V2.2.2/ 4.3.2.10

Test Method: EN300 328 V2.2.2/5.4.10.2.2

7.6.1 LIMIT

The spurious emissions of the receiver shall not exceed the values given in table 3.

In case of equipment with antenna connectors, these limits apply to emissions at the antenna port (conducted). For emissions radiated by the cabinet or for emissions radiated by integral antenna equipment (without antenna connectors), these limits are e.r.p for emissions up to 1 GHz and e.i.r.p for emissions above 1 GHz.

This device uses Radiated measurement.


Table 3: Spurious emission limits for receivers

Frequency range	Maximum power	Bandwidth
30 MHz to 1 GHz	-57 dBm	100 kHz
1 GHz to 12,75 GHz	-47 dBm	1 MHz


----- The following blanks -----

7.6.2 TEST CONFIGURATION

(1) 30MHz-1000MHz

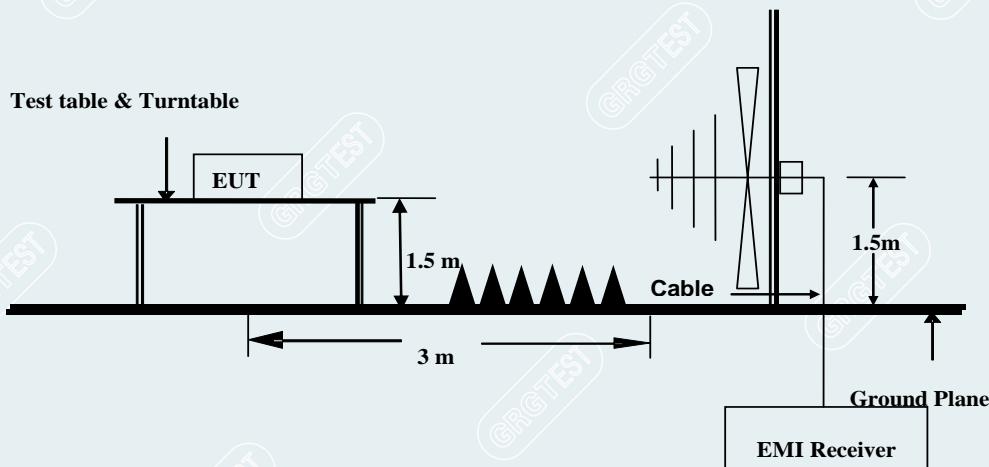

(2) 1000MHz-12750MHz

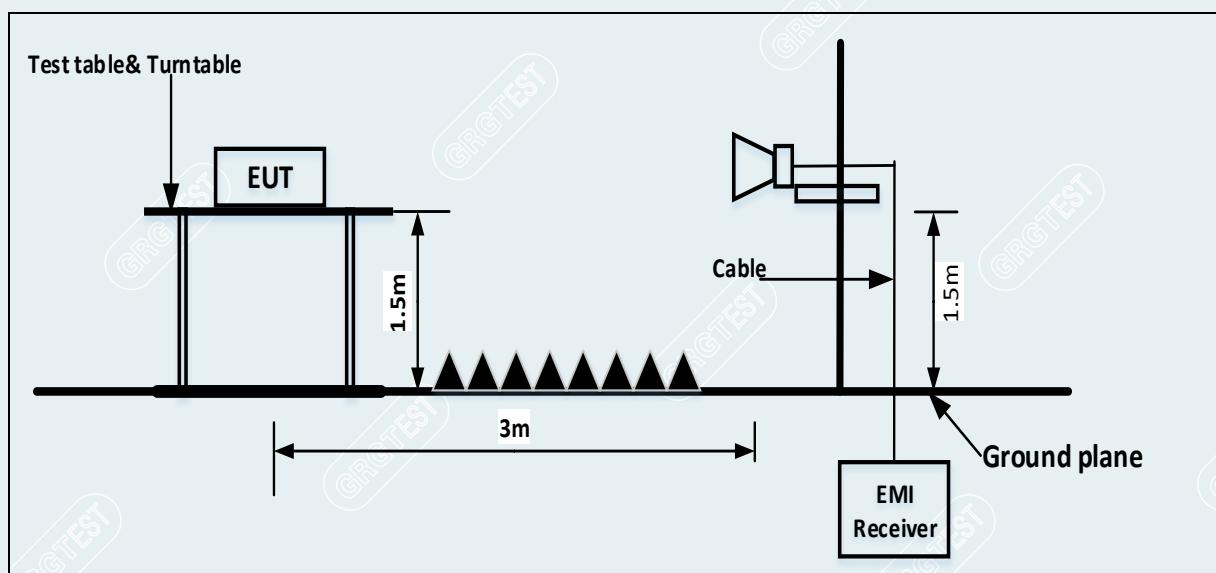

7.6.3 TEST PROCEDURES

Test channel: Lowest channel, Highest channel

Test condition: Normal test conditions.

Test procedure: Test procedure is according to Clause 5.4.10.2.2 of EN 300 328 V2.2.2

Remark: /

7.6.4 DATA SAMPLE


Frequency [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB/m]	Detector	Polarity
XXX	-58.02	-73.33	-57.00	16.33	-15.31	RMS	Horizontal

Frequency (MHz)	= Emission frequency in MHz
Reading (dBm)	= Uncorrected Analyzer / Receiver reading
Correct Factor (dB/m)	= Antenna factor + Cable loss – Amplifier gain
Result (dBm)	= Reading (dBm) + Corr. Factor (dB/m)
Limit (dBm)	= Limit stated in standard
Margin (dB)	= Result (dBm) – Limit(dBm)
RMS	= Root Mean Square

----- The following blanks -----


7.6.5 TEST RESULTS

Project No	E20230128179401	EUT:	Door and Window Sensor P2
Model:	DW-S02E	Sample No:	E20230128179401-0012
Mode:	RX BLE 1M_2402MHz	Voltage:	DC 3V
Environment:	22.3°C/56%RH/101.0kPa	Engineer:	Zhang Qiang
Test Date:	2023-02-01	/	/

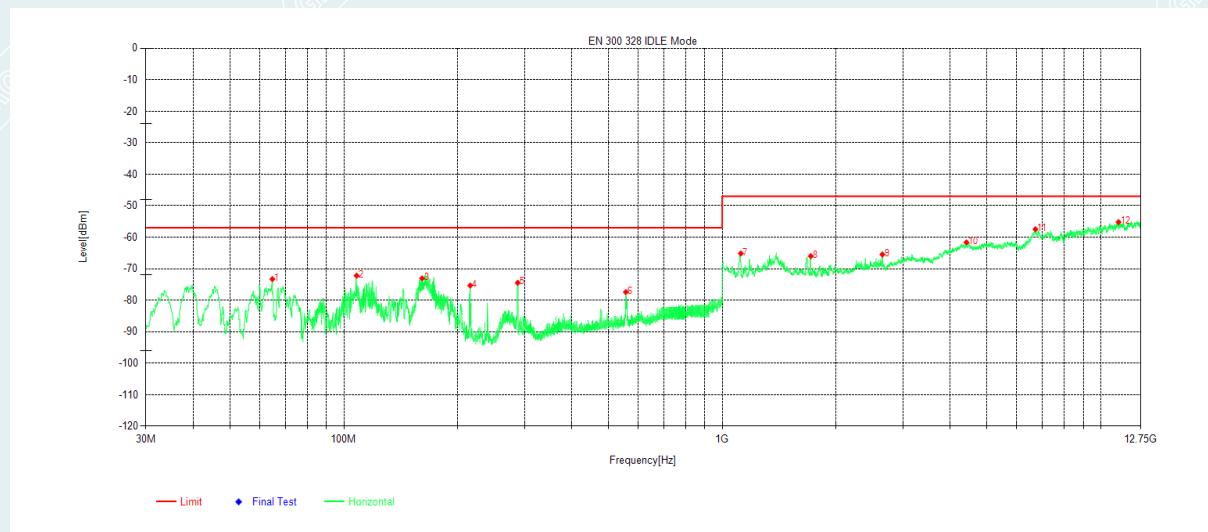


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	64.726	-53.73	-73.29	-57.00	16.29	-19.56	RMS	Horizontal
2	108.085	-54.81	-72.18	-57.00	15.18	-17.37	RMS	Horizontal
3	160.95	-53.22	-73.07	-57.00	16.07	-19.85	RMS	Horizontal
4	215.755	-57.99	-75.32	-57.00	18.32	-17.33	RMS	Horizontal
5	288.117	-60.31	-74.45	-57.00	17.45	-14.14	RMS	Horizontal
6	556.225	-68.15	-77.42	-57.00	20.42	-9.27	RMS	Horizontal
7	1119.85	-50.92	-65.16	-47.00	18.16	-14.24	RMS	Horizontal
8	1714.4	-52.75	-66.00	-47.00	19.00	-13.25	RMS	Horizontal
9	2650.875	-55.46	-65.48	-47.00	18.48	-10.02	RMS	Horizontal
10	4420.425	-60.10	-61.65	-47.00	14.65	-1.55	RMS	Horizontal
11	6726.95	-62.90	-57.47	-47.00	10.47	5.43	RMS	Horizontal
12	11149.65	-67.91	-55.18	-47.00	8.18	12.73	RMS	Horizontal

Project No	E20230128179401	EUT:	Door and Window Sensor P2
Model:	DW-S02E	Sample No:	E20230128179401-0012
Mode:	RX BLE 1M_2402MHz	Voltage:	DC 3V
Environment:	22.3°C/56%RH/101.0kPa	Engineer:	Zhang Qiang
Test Date:	2023-02-01	/	/

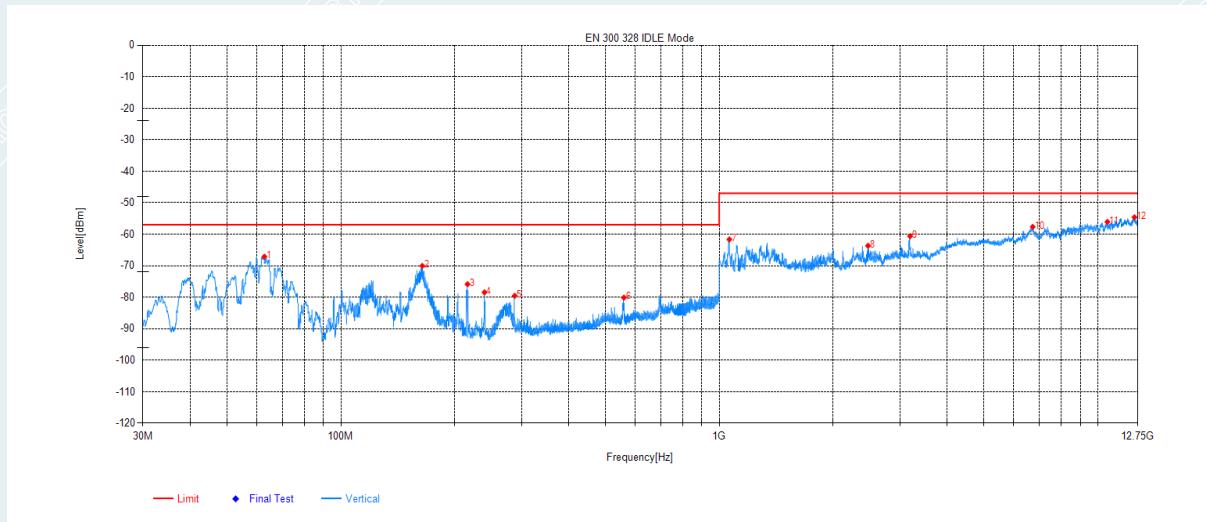

Suspected Data List								
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	62.786	-53.11	-67.12	-57.00	10.12	-14.01	RMS	Vertical
2	164.151	-52.28	-70.05	-57.00	13.05	-17.77	RMS	Vertical
3	216.046	-58.35	-75.87	-57.00	18.87	-17.52	RMS	Vertical
4	239.714	-62.99	-78.46	-57.00	21.46	-15.47	RMS	Vertical
5	288.02	-65.00	-79.54	-57.00	22.54	-14.54	RMS	Vertical
6	560.008	-70.58	-80.12	-57.00	23.12	-9.54	RMS	Vertical
7	1063.45	-48.53	-61.64	-47.00	14.64	-13.11	RMS	Vertical
8	2472.275	-53.95	-63.65	-47.00	16.65	-9.70	RMS	Vertical
9	3194.9	-53.61	-60.62	-47.00	13.62	-7.01	RMS	Vertical
10	6739.875	-63.37	-57.64	-47.00	10.64	5.73	RMS	Vertical
11	10611.5	-67.29	-56.07	-47.00	9.07	11.22	RMS	Vertical
12	12507.95	-69.48	-54.62	-47.00	7.62	14.86	RMS	Vertical


Project No	E20230128179401	EUT:	Door and Window Sensor P2
Model:	DW-S02E	Sample No:	E20230128179401-0012
Mode:	RX BLE 1M_2480MHz	Voltage:	DC 3V
Environment:	22.3°C/56%RH/101.0kPa	Engineer:	Zhang Qiang
Test Date:	2023-02-01	/	/

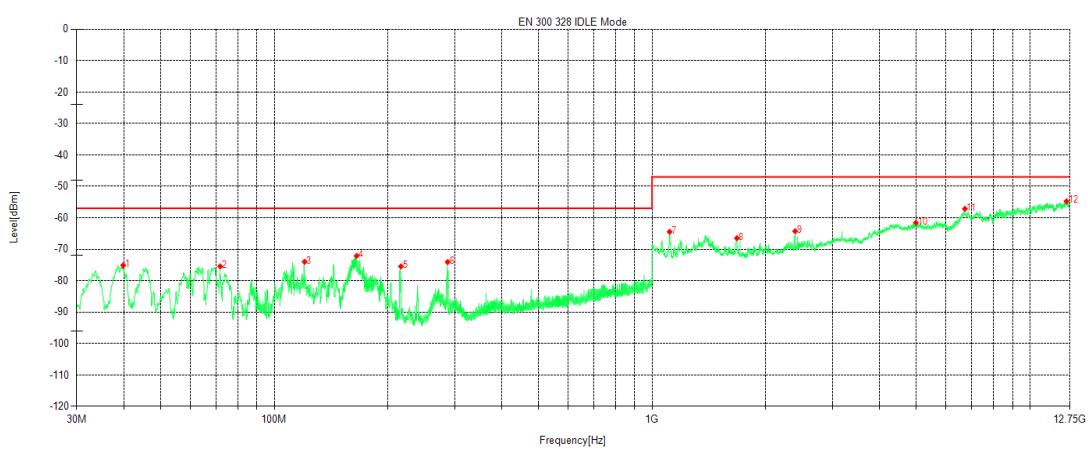

Suspected Data List


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	39.797	-61.25	-75.11	-57.00	18.11	-13.86	RMS	Horizontal
2	71.904	-53.90	-75.44	-57.00	18.44	-21.54	RMS	Horizontal
3	120.307	-55.45	-73.99	-57.00	16.99	-18.54	RMS	Horizontal
4	165.121	-52.47	-72.10	-57.00	15.10	-19.63	RMS	Horizontal
5	216.337	-58.16	-75.47	-57.00	18.47	-17.31	RMS	Horizontal
6	287.535	-59.92	-74.07	-57.00	17.07	-14.15	RMS	Horizontal
7	1112.8	-50.22	-64.44	-47.00	17.44	-14.22	RMS	Horizontal
8	1677.975	-53.48	-66.48	-47.00	19.48	-13.00	RMS	Horizontal
9	2392.375	-53.26	-64.26	-47.00	17.26	-11.00	RMS	Horizontal
10	4992.65	-60.67	-61.59	-47.00	14.59	-0.92	RMS	Horizontal
11	6731.65	-62.58	-57.14	-47.00	10.14	5.44	RMS	Horizontal
12	12507.95	-69.41	-54.75	-47.00	7.75	14.66	RMS	Horizontal

Project No	E20230128179401	EUT:	Door and Window Sensor P2
Model:	DW-S02E	Sample No:	E20230128179401-0012
Mode:	RX BLE 1M_2480MHz	Voltage:	DC 3V
Environment:	22.3°C/56%RH/101.0kPa	Engineer:	Zhang Qiang
Test Date:	2023-02-01	/	/

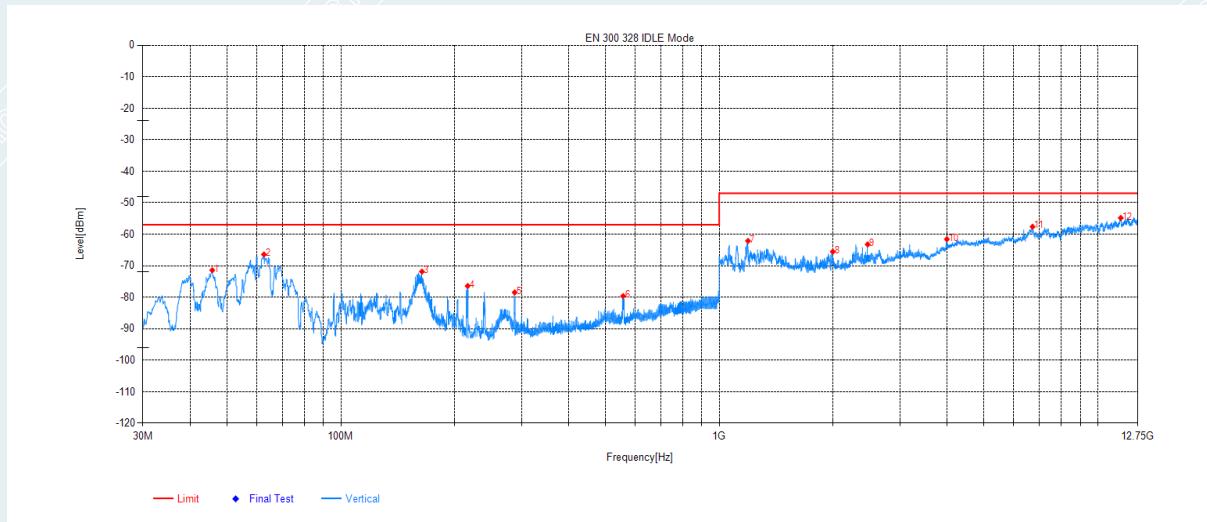


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	45.714	-57.74	-71.41	-57.00	14.41	-13.67	RMS	Vertical
2	62.592	-52.51	-66.42	-57.00	9.42	-13.91	RMS	Vertical
3	163.763	-54.11	-71.87	-57.00	14.87	-17.76	RMS	Vertical
4	216.337	-58.91	-76.43	-57.00	19.43	-17.52	RMS	Vertical
5	288.02	-63.92	-78.46	-57.00	21.46	-14.54	RMS	Vertical
6	557.292	-70.04	-79.62	-57.00	22.62	-9.58	RMS	Vertical
7	1191.525	-48.92	-62.12	-47.00	15.12	-13.20	RMS	Vertical
8	1996.4	-54.07	-65.52	-47.00	18.52	-11.45	RMS	Vertical
9	2467.575	-53.53	-63.20	-47.00	16.20	-9.67	RMS	Vertical
10	3995.075	-58.17	-61.57	-47.00	14.57	-3.40	RMS	Vertical
11	6731.65	-63.29	-57.60	-47.00	10.60	5.69	RMS	Vertical
12	11518.6	-68.64	-54.82	-47.00	7.82	13.82	RMS	Vertical

Project No	E20230128179401	EUT:	Door and Window Sensor P2
Model:	DW-S02E	Sample No:	E20230128179401-0012
Mode:	RX BLE 2M_2402MHz	Voltage:	DC 3V
Environment:	22.3°C/56%RH/101.0kPa	Engineer:	Zhang Qiang
Test Date:	2023-02-01	/	/

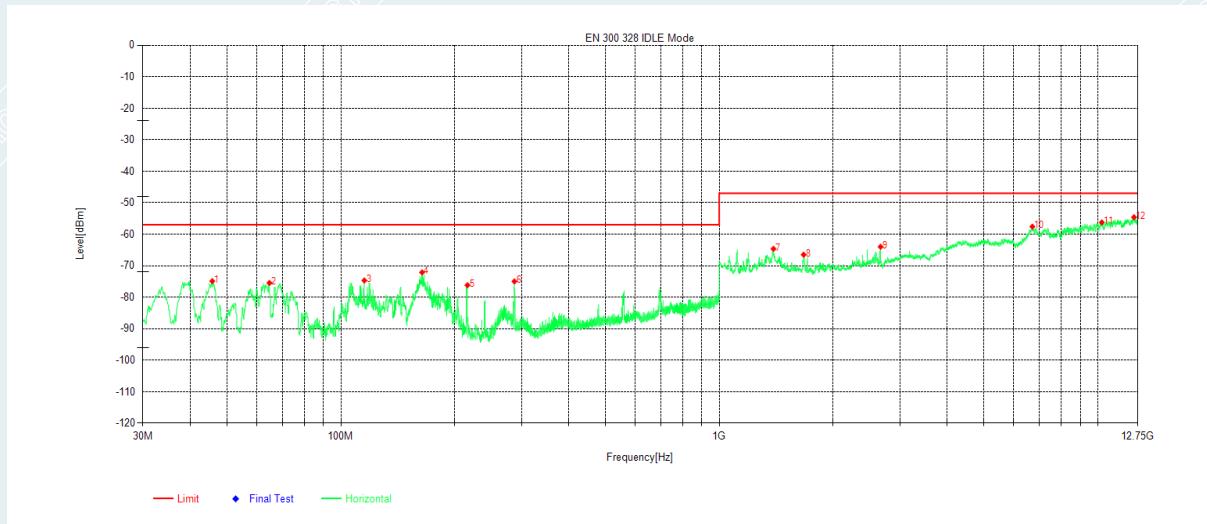


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	45.714	-59.30	-74.89	-57.00	17.89	-15.59	RMS	Horizontal
2	64.726	-55.90	-75.46	-57.00	18.46	-19.56	RMS	Horizontal
3	115.36	-56.64	-74.68	-57.00	17.68	-18.04	RMS	Horizontal
4	163.86	-52.40	-72.10	-57.00	15.10	-19.70	RMS	Horizontal
5	216.046	-58.86	-76.18	-57.00	19.18	-17.32	RMS	Horizontal
6	287.535	-60.83	-74.98	-57.00	17.98	-14.15	RMS	Horizontal
7	1391.275	-54.77	-64.63	-47.00	17.63	-9.86	RMS	Horizontal
8	1670.925	-53.54	-66.50	-47.00	19.50	-12.96	RMS	Horizontal
9	2669.675	-54.04	-63.98	-47.00	16.98	-9.94	RMS	Horizontal
10	6724.6	-63.01	-57.59	-47.00	10.59	5.42	RMS	Horizontal
11	10263.7	-67.96	-56.25	-47.00	9.25	11.71	RMS	Horizontal
12	12487.97	-69.10	-54.60	-47.00	7.60	14.50	RMS	Horizontal

Project No	E20230128179401	EUT:	Door and Window Sensor P2
Model:	DW-S02E	Sample No:	E20230128179401-0012
Mode:	RX BLE 2M_2402MHz	Voltage:	DC 3V
Environment:	22.3°C/56%RH/101.0kPa	Engineer:	Zhang Qiang
Test Date:	2023-02-01	/	/

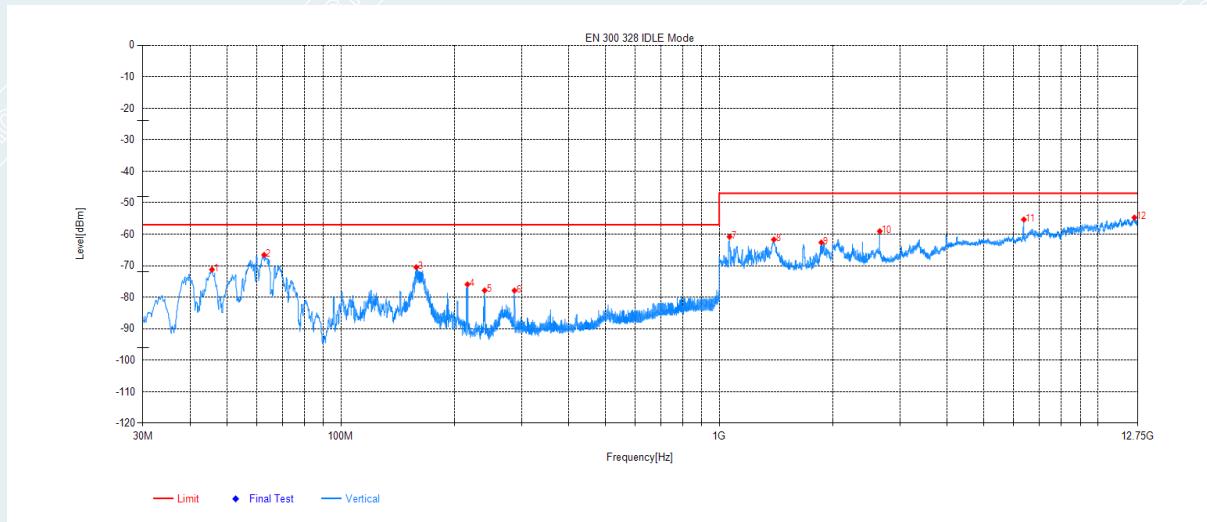


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	45.617	-57.54	-71.22	-57.00	14.22	-13.68	RMS	Vertical
2	62.689	-52.60	-66.56	-57.00	9.56	-13.96	RMS	Vertical
3	158.137	-52.62	-70.48	-57.00	13.48	-17.86	RMS	Vertical
4	216.046	-58.40	-75.92	-57.00	18.92	-17.52	RMS	Vertical
5	239.908	-62.38	-77.83	-57.00	20.83	-15.45	RMS	Vertical
6	287.632	-63.33	-77.88	-57.00	20.88	-14.55	RMS	Vertical
7	1064.625	-47.67	-60.80	-47.00	13.80	-13.13	RMS	Vertical
8	1394.8	-49.99	-61.69	-47.00	14.69	-11.70	RMS	Vertical
9	1861.275	-50.49	-62.63	-47.00	15.63	-12.14	RMS	Vertical
10	2656.75	-49.12	-59.04	-47.00	12.04	-9.92	RMS	Vertical
11	6387.375	-56.92	-55.33	-47.00	8.33	1.59	RMS	Vertical
12	12511.47	-69.50	-54.71	-47.00	7.71	14.79	RMS	Vertical

Project No	E20230128179401	EUT:	Door and Window Sensor P2
Model:	DW-S02E	Sample No:	E20230128179401-0012
Mode:	RX BLE 2M_2480MHz	Voltage:	DC 3V
Environment:	22.3°C/56%RH/101.0kPa	Engineer:	Zhang Qiang
Test Date:	2023-02-01	/	/

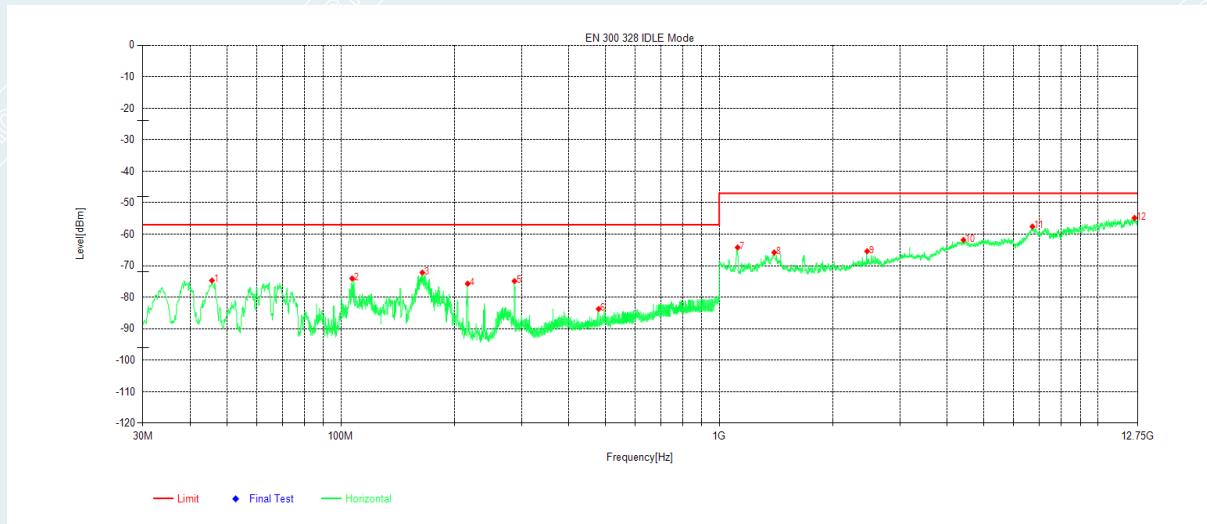

Suspected Data List								
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	45.617	-59.12	-74.68	-57.00	17.68	-15.56	RMS	Horizontal
2	107.115	-56.72	-74.03	-57.00	17.03	-17.31	RMS	Horizontal
3	164.151	-52.48	-72.17	-57.00	15.17	-19.69	RMS	Horizontal
4	216.337	-58.40	-75.71	-57.00	18.71	-17.31	RMS	Horizontal
5	287.535	-60.72	-74.87	-57.00	17.87	-14.15	RMS	Horizontal
6	480.08	-72.38	-83.71	-57.00	26.71	-11.33	RMS	Horizontal
7	1118.675	-49.95	-64.19	-47.00	17.19	-14.24	RMS	Horizontal
8	1397.15	-56.09	-65.79	-47.00	18.79	-9.70	RMS	Horizontal
9	2459.35	-55.73	-65.40	-47.00	18.40	-9.67	RMS	Horizontal
10	4419.25	-60.27	-61.81	-47.00	14.81	-1.54	RMS	Horizontal
11	6728.125	-62.98	-57.55	-47.00	10.55	5.43	RMS	Horizontal
12	12516.17	-69.34	-54.81	-47.00	7.81	14.53	RMS	Horizontal

Project No	E20230128179401	EUT:	Door and Window Sensor P2
Model:	DW-S02E	Sample No:	E20230128179401-0012
Mode:	RX BLE 2M_2480MHz	Voltage:	DC 3V
Environment:	22.3°C/56%RH/101.0kPa	Engineer:	Zhang Qiang
Test Date:	2023-02-01	/	/

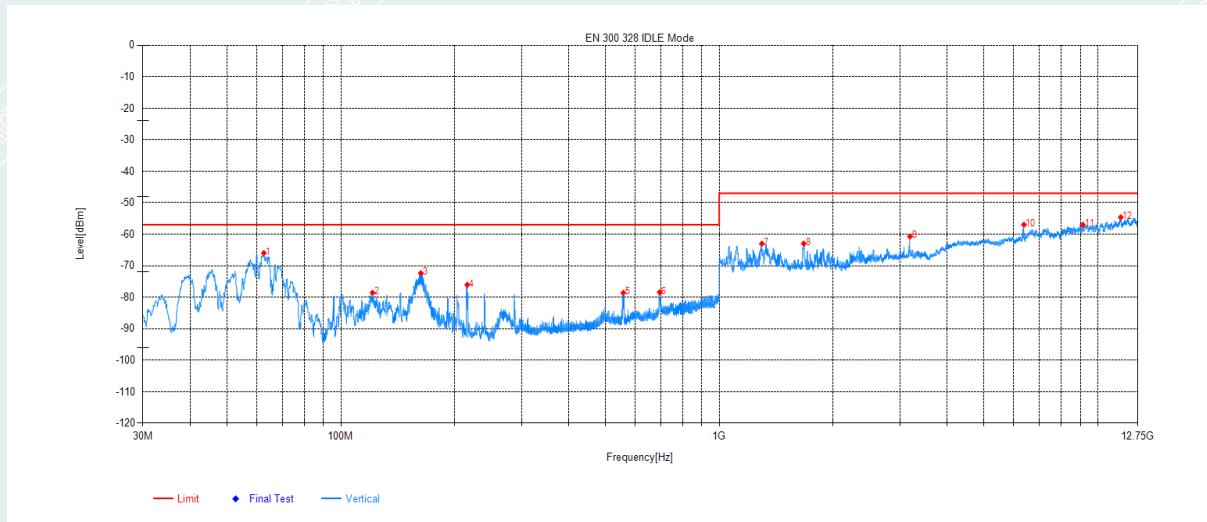

Suspected Data List								
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	62.592	-52.04	-65.95	-57.00	8.95	-13.91	RMS	Vertical
2	121.18	-58.46	-78.57	-57.00	21.57	-20.11	RMS	Vertical
3	162.696	-54.62	-72.35	-57.00	15.35	-17.73	RMS	Vertical
4	215.755	-58.53	-76.05	-57.00	19.05	-17.52	RMS	Vertical
5	557.583	-69.03	-78.60	-57.00	21.60	-9.57	RMS	Vertical
6	695.711	-71.93	-78.41	-57.00	21.41	-6.48	RMS	Vertical
7	1296.1	-51.21	-62.99	-47.00	15.99	-11.78	RMS	Vertical
8	1672.1	-50.30	-62.95	-47.00	15.95	-12.65	RMS	Vertical
9	3192.55	-53.67	-60.69	-47.00	13.69	-7.02	RMS	Vertical
10	6389.725	-58.55	-56.97	-47.00	9.97	1.58	RMS	Vertical
11	9132.175	-66.23	-56.99	-47.00	9.99	9.24	RMS	Vertical
12	11520.95	-68.44	-54.61	-47.00	7.61	13.83	RMS	Vertical

7.7 RECEIVER BLOCKING

Test Requirement: EN300 328 V2.2.2/4.3.1.12 and 4.3.2.11

Test Method: EN300 328 V2.2.2/5.4.11.2.1

7.7.1 LIMIT

For equipment that supports a PER or FER test to be performed, the minimum performance criterion shall be a PER or FER less than or equal to 10 %.

For equipment that does not support a PER or a FER test to be performed, the minimum performance criterion shall be no loss of the wireless transmission function needed for the intended use of the equipment.

The blocking levels at specified frequency offsets shall be equal to or greater than the limits defined for.

Receiver Blocking parameters for Receiver Category 1 equipment

Wanted signal mean power from companion device (dBm) (see notes 1 and 4)	Blocking Signal frequency (MHz)	Blocking signal power (dBm) (see note 4)	Type of blocking signal
(-133dBm+10 × log ₁₀ (OCBW)) or -68dBm whichever is less (see note 2)	2380 2504		
(-139dBm+10 × log ₁₀ (OCBW)) or -74dBm whichever is less (see note 3)	2300 2330 2360 2524 2584 2674	-34	CW

NOTE 1: OCBW is in Hz.

NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to P_{min} + 26 dB where P_{min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.

NOTE 3: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to P_{min} + 20 dB where P_{min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.

NOTE 4: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured positioned as recorded in clause 5.4.3.2.2.

Receiver Blocking parameters for Receiver Category 2 equipment

Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	Blocking Signal frequency (MHz)	Blocking signal power (dBm) (see note 3)	Type of blocking signal
(-139dBm+10 × log ₁₀ (OCBW)+10dBm) or (-74dBm+10dBm) whichever is less (see note 2)	2380 2504 2300 2584	-34	CW

NOTE 1: OCBW is in Hz.

NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to P_{min} + 26 dB where P_{min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.

NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.

Receiver Blocking parameters for Receiver Category 3 equipment

Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	Blocking Signal frequency (MHz)	Blocking signal power (dBm) (see note 3)	Type of blocking signal
(-139dBm+10 × log ₁₀ (OCBW)+20dBm) or (-74dBm+20dBm) whichever is less (see note 2)	2380 2504 2300 2584	-34	CW

NOTE 1: OCBW is in Hz.

NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to P_{min} + 30 dB where P_{min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.

NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.

7.7.2 TEST CONFIGURATION

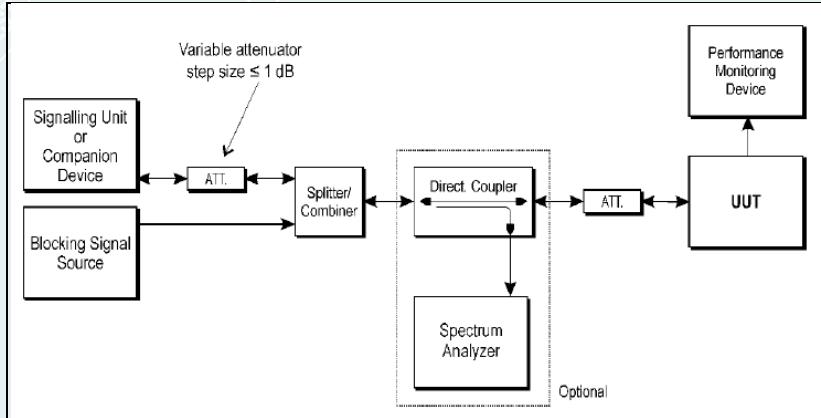


Figure 6.10-1: Receiver Blocking arrangement

7.7.3 TEST PROCEDURES

Test condition: Keep the EUT on the lowest and Highest channel working mode.

Test procedure: Step1:

Test condition: For non-FHSS equipment, the UUT shall be set to the lowest operating channel on which the blocking test has to be performed (see clause 5.4.11.1).

Step 2:

The blocking signal generator is set to the first frequency as defined in the appropriate table corresponding to the receiver category and type of equipment.

Step 3:

With the blocking signal generator switched off, a communication link is established between the UUT and the associated companion device using the test setup shown in figure 6.

Unless the option provided in note 2 of the applicable table referred to in clause 5.4.11.2.1 is used, the level of the wanted signal shall be set to the value provided in the table corresponding to the receiver category and type of equipment. The test procedure defined in clause 5.4.2, and more in particular clause 5.4.2.2.1.2, can be used to measure the (conducted) level of the wanted signal however no correction shall be made for antenna gain of

the companion device (step 6 in clause 5.4.2.2.1.2 shall be ignored). This level may be measured directly at the output of the companion device and a correction is made for the coupling loss into the UUT. The actual level for the wanted signal shall be recorded in the test report.

- When the option provided in note 2 of the applicable table referred to in clause 5.4.11.2.1 is used, the attenuation of the variable attenuator shall be increased in 1 dB steps to a value at which the minimum performance criteria as specified in clause 4.3.1.12.3 or clause 4.3.2.11.3 is still met. The resulting level for the wanted signal at the input of the UUT is Pmin. This signal level (Pmin) is increased by the value provided in note 2 of the applicable table corresponding to the receiver category and type of equipment.

Step 4:

The blocking signal at the UUT is set to the level provided in the table corresponding to the receiver category and type of equipment.

If the performance criteria as specified in clause 4.3.1.12.3 or clause 4.3.2.11.3 are met then proceed to step 6.

Step 5:

If the performance criteria as specified in clause 4.3.1.12.3 or clause 4.3.2.11.3 is not met, step 3 and step 4 shall be repeated after that the frequency of the blocking signal set in step 2 has been increased with a value equal to the Occupied Channel Bandwidth except:

- For the blocking frequency 2 380 MHz, where this frequency offset shall be less than or

equal to 10 MHz. If this frequency offset is more than 7 MHz, the level of the wanted signal shall be increased by 3 dB.

- For the blocking frequency 2 503,5 MHz, where this frequency offset shall be less than or equal to 10 MHz. If this frequency offset is more than 7 MHz, the level of the wanted signal shall be decreased by 3 dB.

If the performance criteria as specified in clause 4.3.1.12.3 or clause 4.3.2.11.3 is still not met, step 3 and step 4 shall be repeated after that the frequency of the blocking signal set in step 2 has been decreased with a value equal to the Occupied Channel Bandwidth except:

- For the blocking frequency 2 380 MHz, where this frequency offset shall be less than or equal to 10 MHz. If this frequency offset is more than 7 MHz, the level of the wanted signal shall be decreased by 3 dB.

- For the blocking frequency 2 503,5 MHz, where this frequency offset shall be less than or equal to 10 MHz. If this frequency offset is more than 7 MHz, the level of the wanted signal shall be increased by 3 dB.

If the performance criteria as specified in clause 4.3.1.12.3 or clause 4.3.2.11.3 is still not met, the UUT fails to comply with the Receiver Blocking requirement and step 6 and step 7 are no longer required.

It shall be recorded in the test report whether the shift of blocking frequencies as described in the present step was used.

Step 6:

Repeat step 4 and step 5 for each remaining combination of frequency and level for the blocking signal as provided in the table corresponding to the receiver category and type of equipment.

Step 7

For non-FHSS equipment, repeat step 2 to step 6 with the UUT operating at the Highest operating channel on which the blocking test has to be performed (see clause 5.4.11.1).

Step 8

It shall be assessed and recorded in the test report whether the UUT complies with the Receiver Blocking requirement.

Keep the EUT on the lowest and Highest channel working mode.

If the equipment can be configured to operate with different Nominal Channel

Bandwidths (e.g. 20 MHz and 40 MHz) and different data rates, then the combination of the smallest channel bandwidth and the lowest data rate for this channel bandwidth which still allows the equipment to operate as intended shall be used.

Remark:

Test channel:

Lowest channel, Highest channel

----- The following blanks -----

7.7.4 TEST RESULTS


Test environment: Normal condition:
Environment: 22.5°C/58%RH/101.0kPa
Test Engineer: Yang Zhaoyun
Test Date: 2023-01-31

Test Mode	Frequency [MHz]	Wanted signal [dBm]	Frequency[MHz]	CW [dBm]	PER [%]	Limit [%]	Verdict
BLE_1M	2402	-67.89	2300	-33	0.00	≤10	PASS
		-67.89	2380	-33	0.70	≤10	PASS
	2480	-67.88	2504	-33	0.00	≤10	PASS
		-67.88	2584	-33	0.50	≤10	PASS


Remark: CW=signal power(-34dBm) + Antenna Gain(1dBi).

----- The following blanks -----

Test screenshots

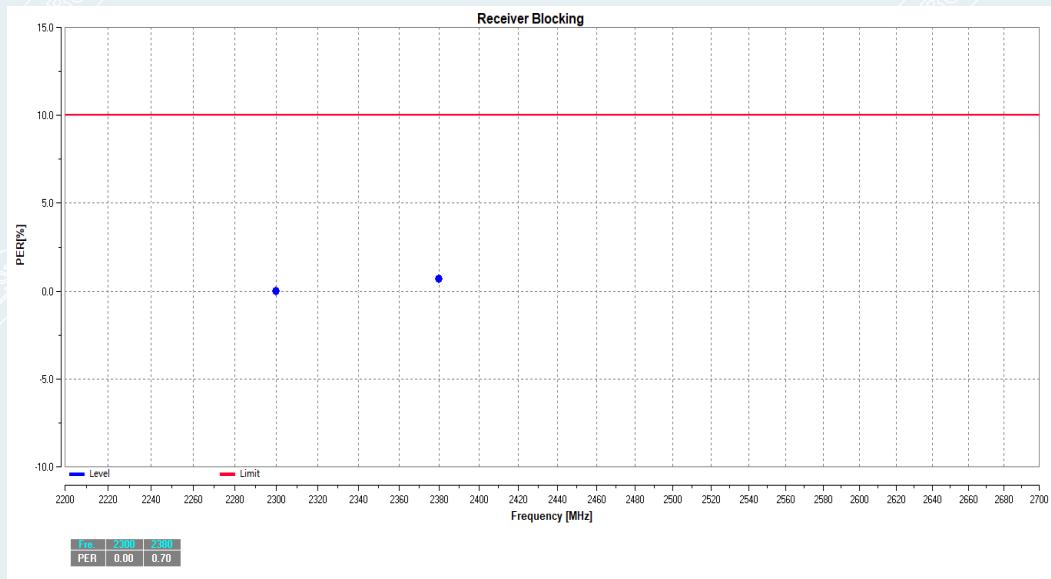

Lowest Frequency: 1M_2402MHz

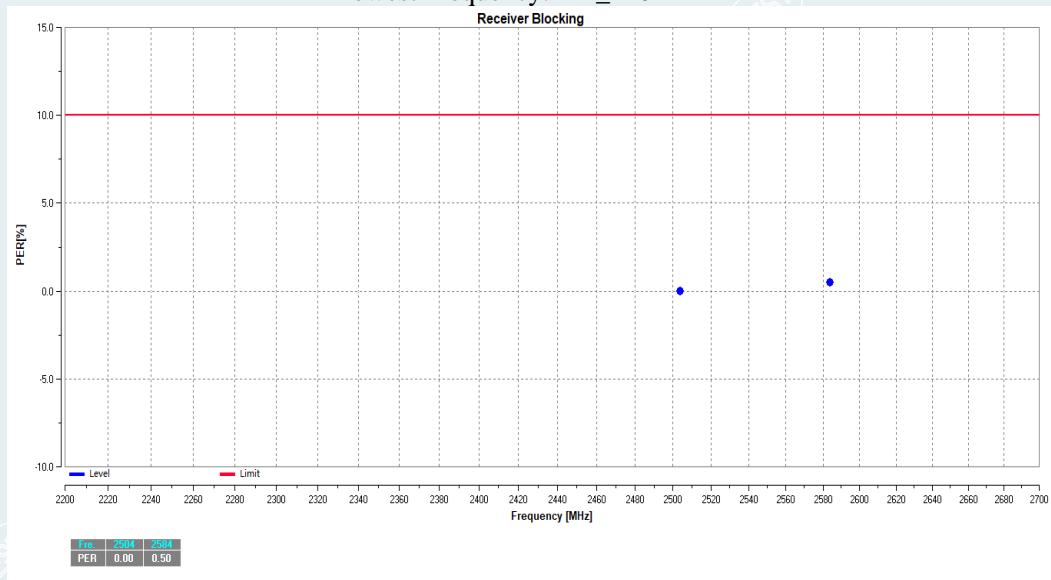

Highest Frequency: 1M_2480MHz

APPENDIX A. PHOTOGRAPH OF THE TEST CONNECTION DIAGRAM

Please refer to the attached document E20230128179401-13- Test Photo.

APPENDIX B. PHOTOGRAPHS OF EUT

Please refer to the attached document E20230128179401-14-EUT Photo.

----- **End of Report** -----