

# TEST REPORT

**Product Name** : Camera Hub G5 Pro (Wi-Fi)  
**Model Number** : CH-C07E, CH-C07D

**Prepared for** : Lumi United Technology Co., Ltd.  
**Address** : Room 801-804, Building 1, Chongwen Park, Nanshan  
iPark, No. 3370, Liuxian Avenue, Fuguang Community,  
Taoyuan Residential District, Nanshan District, Shenzhen,  
China

**Prepared by** : EMTEK (SHENZHEN) CO., LTD.  
**Address** : Bldg 69, Majialong Industry Zone, Nanshan District,  
Shenzhen, Guangdong, China

Tel: (0755) 26954280  
Fax: (0755) 26954282

**Report Number** : ENS2411080085W02301R  
**Date(s) of Tests** : November 12, 2024 to November 20, 2024  
**Date of Issue** : November 23, 2024



## TABLE OF CONTENTS

<b>1. TEST RESULT CERTIFICATION .....</b>	<b>4</b>
<b>2. EUT DESCRIPTION .....</b>	<b>5</b>
<b>3. INFORMATION AS REQUIRED BY EN 300 328 V2.2.2 .....</b>	<b>6</b>
<b>4. SUMMARY OF TEST RESULT .....</b>	<b>8</b>
<b>5. TEST METHODOLOGY .....</b>	<b>9</b>
5.1 GENERAL DESCRIPTION OF APPLIED STANDARDS .....	9
5.2 MEASUREMENT EQUIPMENT USED .....	9
5.3 DESCRIPTION OF TEST MODES .....	10
<b>6. FACILITIES AND ACCREDITATIONS .....</b>	<b>11</b>
6.1 FACILITIES .....	11
6.2 EQUIPMENT .....	11
<b>7. TEST SYSTEM UNCERTAINTY .....</b>	<b>12</b>
<b>8. SETUP OF EQUIPMENT UNDER TEST .....</b>	<b>13</b>
8.1 SETUP CONFIGURATION OF EUT .....	13
8.2 SUPPORT EQUIPMENT .....	14
<b>9. ETSI EN 300 328 REQUIREMENTS .....</b>	<b>15</b>
9.1 RF OUTPUT POWER .....	15
9.2 POWER SPECTRAL DENSITY .....	19
9.3 OCCUPIED CHANNEL BANDWIDTH .....	23
9.4 TRANSMITTER UNWANTED EMISSION IN THE OUT-OF BAND .....	27
9.5 TRANSMITTER UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN .....	33
9.6 RECEIVER SPURIOUS EMISSIONS .....	37
9.7 RECEIVER BLOCKING .....	40
<b>10. APPENDIX PHOTOGRAPHS OF TEST SETUP .....</b>	<b>45</b>

## Modified Information

Version	Report No.	Revision Date	Summary
	ENS2411080085W02301R	/	Original Report



## 1. TEST RESULT CERTIFICATION

Applicant : Lumi United Technology Co., Ltd.  
Address : Room 801-804, Building 1, Chongwen Park, Nanshan iPark, No. 3370, Liuxian Avenue, Fuguang Community, Taoyuan Residential District, Nanshan District,  
Manufacturer : Lumi United Technology Co., Ltd.  
Address : Room 801-804, Building 1, Chongwen Park, Nanshan iPark, No. 3370, Liuxian Avenue, Fuguang Community, Taoyuan Residential District, Nanshan District,  
Product Name : Camera Hub G5 Pro (Wi-Fi)  
Model Name : CH-C07E, CH-C07D  
Trademark : Aqara


### Measurement Procedure Used:


APPLICABLE STANDARDS	
STANDARD	TEST RESULT
ETSI EN 300 328 v2.2.2: 2019	PASS
AS/NZS 4268: 2017 Amd 1:2021	PASS


The device described above is tested by EMTEK (Shenzhen) Co., Ltd. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and EMTEK (Shenzhen) Co., Ltd. is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the above table standards requirement.

This report applies to above tested sample only and shall not be reproduced in part without written approval of EMTEK (Shenzhen) Co., Ltd.

Date of Test : November 12, 2024 to November 20, 2024

Prepared by :   
Una Yu/Editor

Reviewer :   
Joe Xia/Supervisor

Approved & Authorized Signer :   
Lisa Wang/Manager

## 2. EUT DESCRIPTION

Product Name:	Camera Hub G5 Pro (Wi-Fi)
Model Number:	CH-C07E, CH-C07D
BLE Version:	V5.0
Modulation:	GFSK
Frequency Range:	2402MHz-2480MHz
Number of Channels:	40 Channels
Antenna Type:	FPC Antenna
Antenna Gain:	0 dBi
Power Supply:	5V 2A
Temperature Range:	-30~+50℃

**Note:** For more details, please refer to the user's manual of the EUT.

### 3. INFORMATION AS REQUIRED BY EN 300 328 V2.2.2

EN 300 328	Information Is Provided By The Manufacturer	
The Type Of Modulation Used By The Equipment	<input type="checkbox"/> FHSS <input checked="" type="checkbox"/> other forms of modulation	
In Case Of FHSS Modulation:	<input type="checkbox"/> In case of non-Adaptive Frequency Hopping equipment The number of Hopping Frequencies:	
	<input type="checkbox"/> In case of Adaptive Frequency Hopping Equipment The maximum number of Hopping Frequencies: The minimum number of Hopping Frequencies:	
The Worst Case Operational Mode For Each Of The Following Tests:	RF Output Power	PASS
	Power Spectral Density	PASS
	Duty Cycle, Tx-Sequence, Tx-gap.	N/A
	Accumulated Transmit time, Frequency Occupation & Hopping Sequence (only for FHSS equipment)	N/A
	Hopping Frequency Separation (only for FHSS equipment)	N/A
	Medium Utilisation.	N/A
	Adaptivity	N/A
	Receiver Blocking.	PASS
	Nominal Channel Bandwidth	PASS
	Transmitter Unwanted Emissions in the OOB domain.	PASS
	Transmitter Unwanted Emissions in the spurious domain	PASS
	Receiver spurious emissions	PASS
The Different Transmit Operating Modes (Tick All That Apply):	<input checked="" type="checkbox"/> Operating mode 1: Single Antenna Equipment	
	<input checked="" type="checkbox"/>	Equipment with only 1 antenna
	<input type="checkbox"/>	Equipment with 2 diversity antennas but only 1 antenna active at any moment in time
	<input type="checkbox"/>	Smart Antenna Systems with 2 or more antennas, but operating in a (legacy) mode where only 1 antenna is used. (e.g. IEEE 802.11™ [i.3] legacy mode in smart antenna systems)
	<input type="checkbox"/> Operating mode 2: Smart Antenna Systems - Multiple Antennas without beam forming	
	<input type="checkbox"/>	Single spatial stream / Standard throughput / (e.g. IEEE 802.11™ [i.3] legacy mode)
	<input type="checkbox"/>	High Throughput (> 1 spatial stream) using Occupied Channel

		Bandwidth 1
	<input type="checkbox"/>	High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 2
	<input type="checkbox"/>	Operating mode 3: Smart Antenna Systems - Multiple Antennas with beam forming
	<input type="checkbox"/>	Single spatial stream / Standard throughput (e.g. IEEE 802.11™ [i.3] legacy mode)
	<input type="checkbox"/>	High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 1
	<input type="checkbox"/>	High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 2
Operating Frequency Range(S) Of The Equipment:	Operating Frequency Range: 2402 MHz to 2480 MHz	
Type of Equipment (stand-alone, combined, plug-in radio device, etc.):	<input type="checkbox"/> Stand-alone <input checked="" type="checkbox"/> Combined Equipment (Equipment where the radio part is fully integrated within another type of equipment) <input type="checkbox"/> Plug-in radio device (Equipment intended for a variety of host systems) <input type="checkbox"/> Other	
Describe the test modes available which can facilitate testing:	Modulation Mode: GFSK Test Frequency: Low Frequency, Middle Frequency, High Frequency	
The equipment type (e.g. Bluetooth®, IEEE 802.11™ [i.3], proprietary, etc.):	Bluetooth Low Energy	
Note: N/A means not applicable.		

## 4. SUMMARY OF TEST RESULT

Clause (EN 300 328)	Test Parameter	Verdict	Remark
4.3.2.2	RF Output Power	PASS	
4.3.2.3	Power Spectral Density	PASS	
4.3.2.4	Duty Cycle and Tx-Sequence and Tx-Gap	N/A (See Note1)	Only applicable for non-adaptive equipment Output Power >10dBm
4.3.2.5	Medium Utilisation Factor	N/A (See Note1)	Only applicable for non-adaptive equipment Output Power >10dBm
4.3.2.6	Adaptivity (adaptive equipment using modulations other than FHSS)	N/A (See Note1)	Only applicable for adaptive equipment Output Power >10dBm
4.3.2.7	Occupied Channel Bandwidth	PASS	
4.3.2.8	Transmitter Unwanted Emission in the Out-of Band	PASS	
4.3.2.9	Transmitter Unwanted Emissions in the Spurious Domain	PASS	
4.3.2.10	Receiver Spurious Emissions	PASS	
4.3.2.11	Receiver Blocking	PASS (See Note2)	Receiver category 2
4.3.2.12	Geo-location capability	N/A (See Note1)	Only applicable for have Geo-location function equipment
<p>NOTE1: N/A means not applicable</p> <p>NOTE2: Receiver category 1(Adaptive equipment with a maximum RF output power greater than 10 dBm e.i.r.p. shall be considered as receiver category 1 equipment.)</p> <p>Receiver category 2(Non-adaptive equipment with a Medium Utilization (MU) factor greater than 1 % and less than or equal to 10 % or adaptive equipment with a maximum RF output power of 10 dBm e.i.r.p. shall be considered as receiver category 2 equipment.)</p> <p>Receiver category 3(Non-adaptive equipment with a maximum Medium Utilization (MU) factor of 1 % or adaptive equipment with a maximum RF output power of 0 dBm e.i.r.p. shall be considered as receiver category 3 equipment.)</p>			



## 5. TEST METHODOLOGY

### 5.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:

ETSI EN 300 328 –Wideband transmission systems; Data transmission equipment operating in the 2,4 GHz ISM band and using wide band modulation techniques; Harmonised Standard covering the essential requirements of article 3.2 of Directive 2014/53/EU

### 5.2 MEASUREMENT EQUIPMENT USED

#### For Spurious Emissions Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Pre-Amplifier	Bonn	BLMA 011001N	2213967A	2024/10/18	1Year
EMI Test Receiver	Rohde & Schwarz	ESR7	102551	2024/10/18	1Year
Bilog Antenna	Schwarzbeck	VULB9163	9163142	2024/7/8	2Year
Horn antenna	Schwarzbeck	BBHA9120D	9120D-1198	2023/6/2	2Year
Pre-Amplifier	Bonn	BLMA 0118-5G	2213967B-01	2024/10/18	1Year
Spectrum Analyzer	Rohde & Schwarz	FSV3044	101290	2024/10/18	1Year
Horn antenna	Schwarzbeck	BBHA9170	9170-399	2023/5/12	2Year
Pre-Amplifier	Lunar EM	LNA18G26-40	J1012131010001	2024/5/11	1Year
Pre-Amplifier	Lunar EM	LNA26G40-40	J1013131028001	2024/5/11	1Year
Loop Antenna	Schwarzbeck	FMZB1519	1519-012	2023/5/12	2Year
Wideband Radio Communication Tester	R&S	CMW500	147366	2024/5/10	1Year

#### For Other Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Wideband Radio Communication Tester	R&S	CMW500	171168	2024/9/18	1Year
Frequency Extender	R&S	CMW-Z800A	100430	2024/9/18	1Year
Analog Signal Generator	R&S	SMB100A	183237	2024/9/18	1Year
Vector Signal Generator	R&S	SMM100A	101808	2024/9/18	1Year
RF Control Unit(Power Meter)	Tonscend	JS0806-2	22C8060567	2024/9/18	1Year
Temperature&Humidity Chamber	ESPEC	EL-02KA	12107166	2024/5/10	1 Year
DC Power Supply	KEYSIGHT	E3642A	MY53030016	2024/9/18	1 Year

### 5.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

The EUT has been tested under its typical operating condition. so those data rate (GFSK: 1 Mbps;) were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Frequency and Channel list for BLE:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	18	2438	...	...
1	2404	19	2440	37	2476
2	2406	20	2440	38	2478
...	...	...	...	39	2480
Note: $f_c = 2402\text{MHz} + k \times 2\text{MHz}$ $k=0$ to 39					

Test Frequency and channel for BLE:

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	19	2440	39	2480

## 6. FACILITIES AND ACCREDITATIONS

### 6.1 FACILITIES

Site Description

Name of Firm : EMTEK (SHENZHEN) CO., LTD.

Site Location : Building 69, Majialong Industry Zone, Nanshan District, Shenzhen,  
Guangdong, China


### 6.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with preselectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

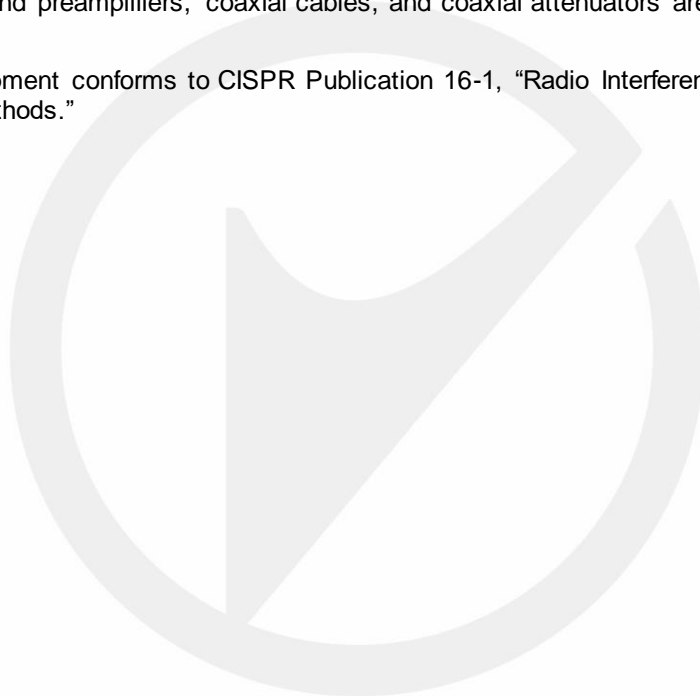

## 7. TEST SYSTEM UNCERTAINTY

Maximum measurement uncertainty of the test system


Test Parameter	Measurement Uncertainty
RF Output Power	±1.0%
Power Spectral Density	±0.9%
Duty Cycle and Tx-Sequence and Tx-Gap	±1.3%
Medium Utilisation Factor	±1.5%
Occupied Channel Bandwidth	±2.3%
Transmitter Unwanted Emission in the Out-of Band	±1.2%
Transmitter Unwanted Emissions in the Spurious Domain	±2.7%
Receiver Spurious Emissions	±2.7%
Temperature	±3.2%
Humidity	±2.5%



## 8. SETUP OF EQUIPMENT UNDER TEST

### 8.1 SETUP CONFIGURATION OF EUT

Conducted measurements configuration of EUT shall be as follows:

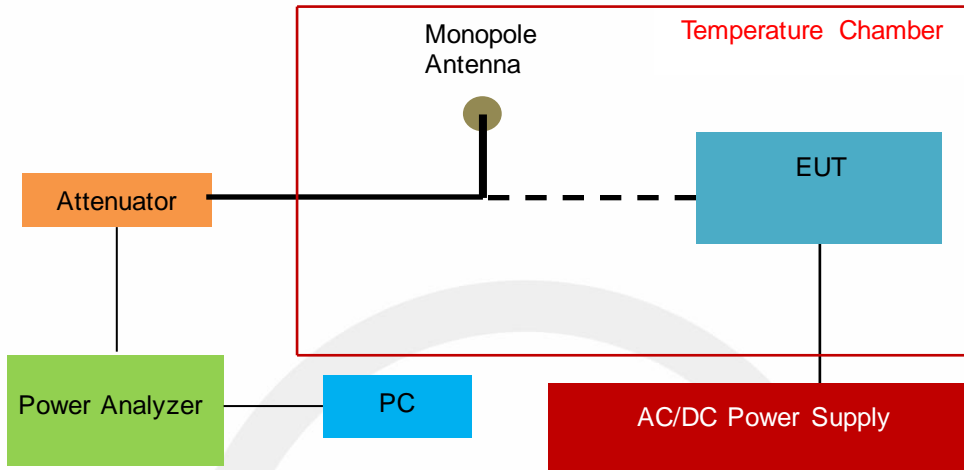


#### Remarks:


The Signal Analyzer could be connected to a monopole antenna or directly connected to the EUT, if the EUT has already employing an antenna connector.

Radiated measurements configuration of EUT shall be as follows:

#### Below 1GHz

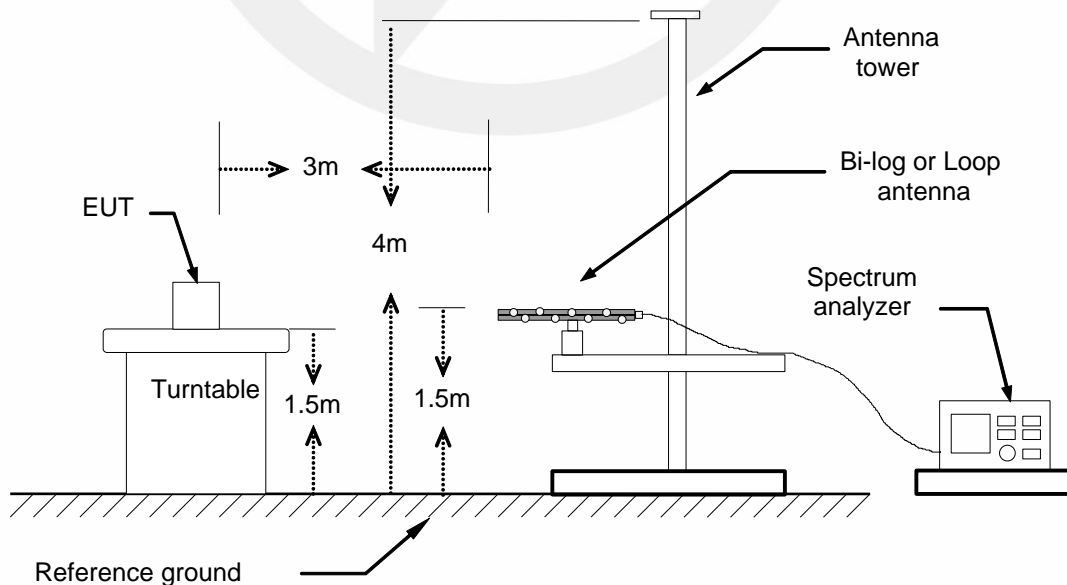

## Above 1GHz

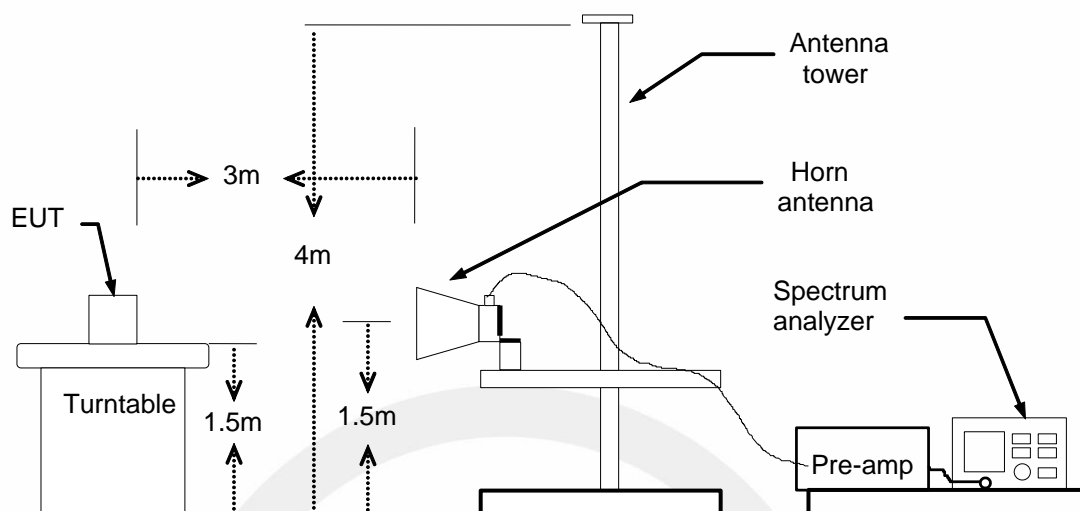

## 8.2 SUPPORT EQUIPMENT

N/A

### Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

## 9. ETSI EN 300 328 REQUIREMENTS

### 9.1 RF OUTPUT POWER

#### 9.1.1 Applicable standard

EN 300 328 Clause 4.3.2.2

#### 9.1.2 Conformance Limit

The Maximum RF Output Power  $\leq 100$  mW (20 dBm) (EIRP) at both Normal and Extreme conditions.

#### 9.1.3 Test Configuration

The measurements for RF output power shall be performed at both normal environmental conditions and at the extremes of the operating temperature range.

Radiated measurements shall only be used for integral antenna equipment that does not have a temporary antenna connector(s) provided.

Conducted measurements shall be used for antenna equipment provided a temporary antenna connector(s)

#### 9.1.4 Test Procedure

1. Please refer to ETSI EN 300 328 (V2.2.2) clause 5.4.2.1 for the test conditions.
2. Please refer to ETSI EN 300 328 (V2.2.2) clause 5.4.2.2 for the measurement method.

The test procedure shall be as follows:

##### ■Conducted measurements

##### Step 1:

- Use a fast power sensor with a minimum sensitivity of -40 dBm and capable of minimum 1 MS/s.
  - Use the following settings:
    - Sample speed 1 MS/s or faster.
    - The samples shall represent the RMS power of the signal.
    - Measurement duration: For non-adaptive equipment: equal to the observation period defined in clause 4.3.1.3.2 or clause 4.3.2.4.2. For adaptive equipment, the measurement duration shall be long enough to ensure a minimum number of bursts (at least 10) are captured.
- For adaptive equipment, to increase the measurement accuracy, a higher number of bursts may be used.

##### Step 2:

- For conducted measurements on devices with one transmit chain:
  - Connect the power sensor to the transmit port, sample the transmit signal and store the raw data. Use these stored samples in all following steps.
- For conducted measurements on devices with multiple transmit chains:
  - Connect one power sensor to each transmit port for a synchronous measurement on all transmit ports.
  - Trigger the power sensors so that they start sampling at the same time. Make sure the time difference between the samples of all sensors is less than 500 ns.
  - For each individual sampling point (time domain), sum the coincident power samples of all ports and store them. Use these summed samples in all following steps.

##### Step 3:

- Find the start and stop times of each burst in the stored measurement samples.

The start and stop times are defined as the points where the power is at least 30 dB below the highest value of the stored samples in step 2.

In case of insufficient dynamic range, the value of 30 dB may need to be reduced appropriately.

##### Step 4:

- Between the start and stop times of each individual burst calculate the RMS power over the burst using the formula below. Save these Pburst values, as well as the start and stop times for each burst.

$$P_{burst} = \frac{1}{k} \sum_{n=1}^k P_{sample}(n)$$

with k being the total number of samples and n the actual sample number.

##### Step 5:

- The highest of all Pburst values (value "A" in dBm) will be used for maximum e.i.r.p. calculations.

##### Step 6:

- Add the (stated) antenna assembly gain "G" in dBi of the individual antenna.
- If applicable, add the additional beamforming gain "Y" in dB.
- If more than one antenna assembly is intended for this power setting, the maximum overall antenna gain (G or G + Y) shall be used.
- The RF Output Power (P) shall be calculated using the formula below:  $P = A + G + Y$
- This value, which shall comply with the limit given in clause 4.3.1.2.3 or clause 4.3.2.2.3, shall be recorded in the test report.


#### ■ Radiated measurements

This method shall only be used for integral antenna equipment that does not have a temporary antenna connector(s) provided.

When performing radiated measurements, the UUT shall be configured and antenna(s) positioned (including smart antenna systems and equipment capable of beamforming) for maximum e.i.r.p. towards the measuring antenna. This position shall be recorded.

A test site as described in annex B and applicable measurement procedures as described in annex C shall be used.

Taking into account the calibration factor from the measurement site, the test procedure for RF Output Power is further as described under clause 5.4.2.2.1.2, step 1 to step 5. The RF Output Power P is equal to the value A obtained in step 5. The test procedure for Duty Cycle, Tx-sequence, Tx-gap is further as described in clause 5.4.2.2.1.3 and the test procedure for Medium Utilization is further as described in clause 5.4.2.2.1.4.

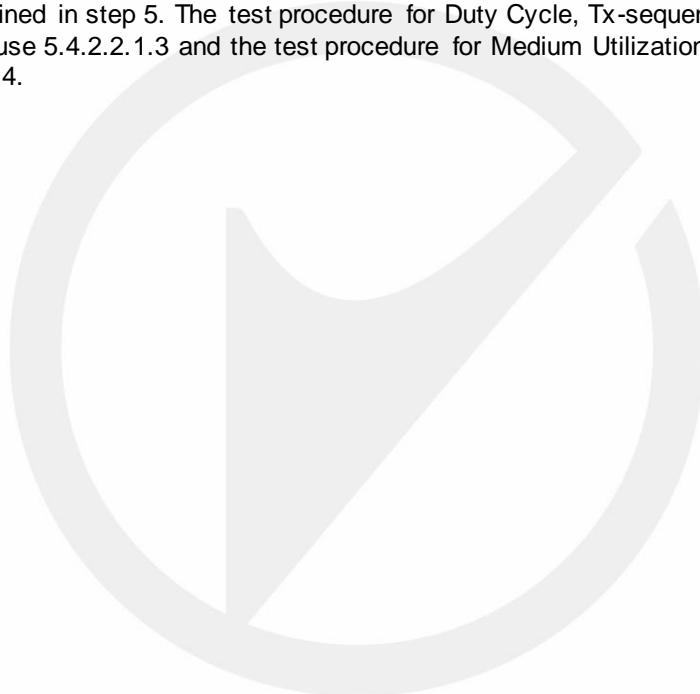




### 9.1.5 Test Results


1M

Temperature:		Refer to the following table			
Humidity:		45 % RH		Tested by:	CZF
Test Conditions			Transmitter Power (dBm)		
			Temp (25)°C	Temp (-30)°C	Temp (50)°C
MODES	CHANNEL	VOLT POWER	DC 5V	DC 5V	DC 5V
GFSK	2402 MHz	RMS	7.33	7.03	7.16
	2440 MHz	RMS	9.42	9.33	9.29
	2480 MHz	RMS	9.66	9.48	9.38
Limit			<= 20dBm		
Verdict			PASS	PASS	PASS


**Remark:** All the modulation modes were tested, the data of the worst mode are described in the table.

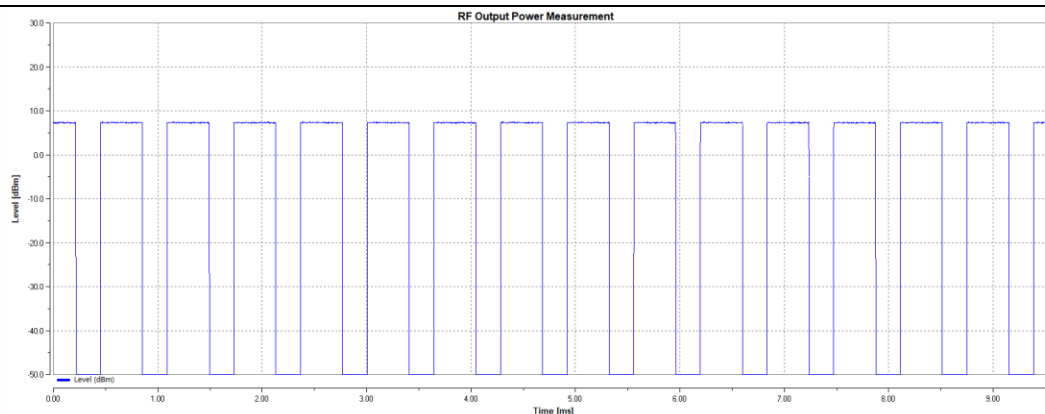

NTNV-BLE\_1M-Ant1-2402-PASS

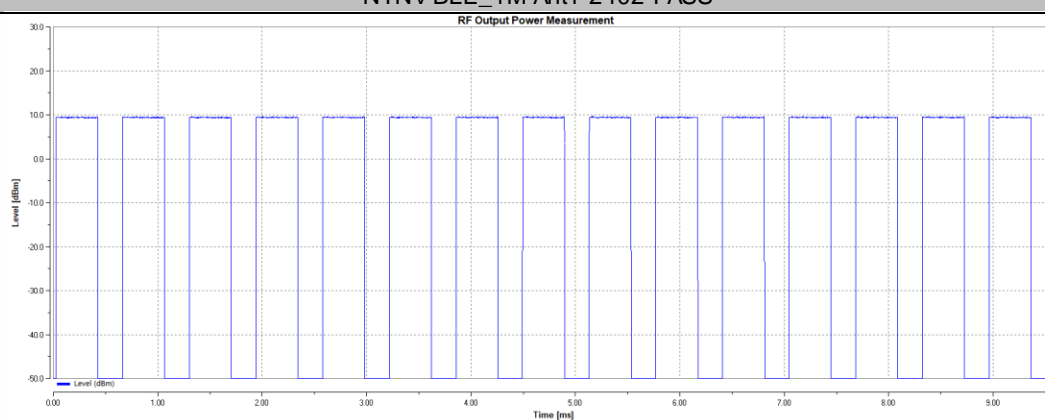

NTNV-BLE\_1M-Ant1-2440-PASS

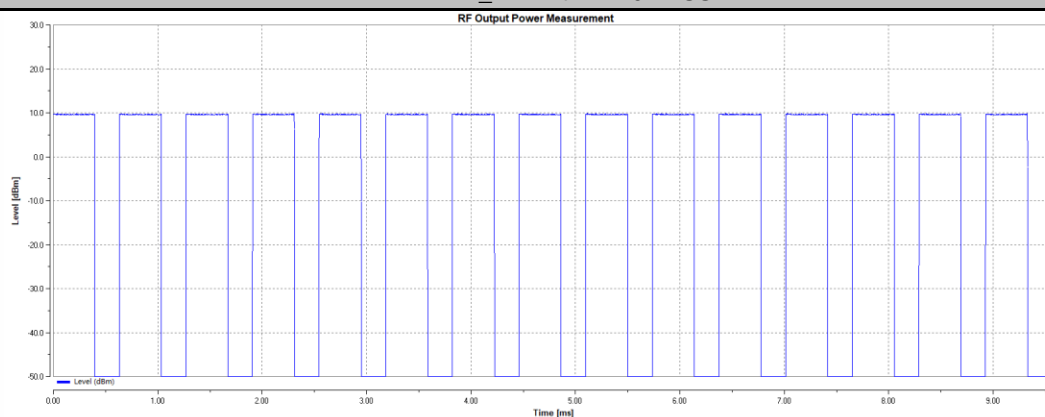

NTNV-BLE\_1M-Ant1-2480-PASS

## 9.2 POWER SPECTRAL DENSITY

### 9.2.1 Applicable standard

According to ETSI EN 300 328 clause 4.3.2.3

### 9.2.2 Conformance Limit

The Maximum Power Spectrum Density  $\leq 10$  dBm/MHz

### 9.2.3 Test Configuration

The measurements for power spectral density shall only be performed at normal test conditions.

Radiated measurements shall only be used for integral antenna equipment that does not have a temporary antenna connector(s) provided.

Conducted measurements shall be used for antenna equipment provided a temporary antenna connector(s) provided.

### 9.2.4 Test Procedure

1. Please refer to ETSI EN 300 328 (V2.2.2) clause 5.4.3.1 for the test conditions.
2. Please refer to ETSI EN 300 328 (V2.2.2) clause 5.4.3.2 for the measurement method.

The test procedure shall be as follows:

#### ■ Conducted measurement

- Option 1: For equipment with continuous and non-continuous transmissions

The transmitter shall be connected to a spectrum analyser and the Power Spectral Density (PSD) as defined in clause 4.3.2.3 shall be measured and recorded.

Step 1:

Connect the UUT to the spectrum analyser and use the following settings:

- Start Frequency: 2 400 MHz
- Stop Frequency: 2 483,5 MHz
- Resolution BW: 10 kHz
- Video BW: 30 kHz
- Sweep Points: > 8 350; for spectrum analysers not supporting this number of sweep points, the frequency band may be segmented
- Detector: RMS
- Trace Mode: Max Hold
- Sweep time: For non-continuous transmissions:  $2 \times \text{Channel Occupancy Time} \times \text{number of sweep points}$

For continuous transmissions: 10 s; the sweep time may be increased further until a value where the sweep time has no further impact anymore on the RMS value of the signal.

For non-continuous signals, wait for the trace to stabilize.

Save the data (trace data) set to a file.

Step 2:

For conducted measurements on smart antenna systems using either operating mode 2 or operating mode 3 (see clause 5.3.2.2), repeat the measurement for each of the transmit ports. For each sampling point (frequency domain), add up the coincident power values (in mW) for the different transmit chains and use this as the new data set.

Step 3:

Add up the values for power for all the samples in the file using the formula below.

$$P_{Sum} = \sum_{n=1}^k P_{sample}(n)$$

With k being the total number of samples and n the actual sample number.

**Step 4:**

Normalize the individual values for power (in dBm) so that the sum is equal to the RF Output Power (e.i.r.p.) measured in clause 5.4.2 and save the corrected data. The following formulas can be used:

$$C_{Corr} = P_{Sum} - P_{e.i.r.p.}$$

$$P_{Samplecorr}(n) = P_{Sample}(n) - C_{Corr}$$

With n being the actual sample number

**Step 5:**

Starting from the first sample  $P_{Samplecorr}(n)$  (lowest frequency), add up the power (in mW) of the following samples representing a 1 MHz segment and record the results for power and position (i.e. sample #1 to sample #100). This is the Power Spectral Density (e.i.r.p.) for the first 1 MHz segment which shall be recorded.

**Step 6:**

Shift the start point of the samples added up in step 5 by one sample and repeat the procedure in step 5 (i.e. sample #2 to sample #101).

**Step 7:**

Repeat step 6 until the end of the data set and record the Power Spectral Density values for each of the 1 MHz segments.

From all the recorded results, the highest value is the maximum Power Spectral Density (PSD) for the UUT. This value, which shall comply with the limit given in clause 4.3.2.3.3, shall be recorded in the test report.

● **Option 2: For equipment with continuous transmission capability**

This option is for equipment that can be configured to operate in a continuous transmit mode (100 % DC).

**Step 1:**

• Connect the UUT to the spectrum analyser and use the following settings:

- Centre Frequency: The centre frequency of the channel under test
- RBW: 1 MHz
- VBW: 3 MHz
- Frequency Span: At least  $2 \times$  Occupied Channel Bandwidth
- Detector Mode: Peak
- Trace Mode: Max Hold

**Step 2:**

• When the trace is complete, find the peak value of the power envelope and record the frequency.

**Step 3:**

• Make the following changes to the settings of the spectrum analyser:

- Centre Frequency: Equal to the frequency recorded in step 2
- Frequency Span: 3 MHz
- RBW: 1 MHz
- VBW: 3 MHz
- Sweep Time: 1 minute
- Detector Mode: RMS
- Trace Mode: Max Hold

**Step 4:**

• When the trace is complete, the trace shall be captured using the "Hold" or "View" option on the spectrum analyser.

• Find the peak value of the trace and place the analyser marker on this peak. This level is recorded as the highest mean power (power spectral density) D in a 1 MHz band.

• Alternatively, where a spectrum analyser is equipped with a function to measure power spectral density, this function may be used to display the power spectral density D in dBm / MHz.

• In case of conducted measurements on smart antenna systems operating in a mode with multiple transmit chains active simultaneously, the power spectral density of each transmit chain shall be measured separately to calculate the total power spectral density (value D in dBm / MHz) for the UUT.

**Step 5:**

• The maximum Power Spectral Density (PSD) e.i.r.p. is calculated from the above measured power spectral density D, the applicable antenna assembly gain G in dBi and if applicable the beamforming gain Y in dB, according to the formula below. This value shall be recorded in the test report. If more than one antenna assembly is intended for this power setting, the gain of the antenna assembly with the highest gain shall be used.

$$PSD = D + G + Y \text{ (dBm / MHz)}$$

#### ■Radiated measurement

When performing radiated measurements, the UUT shall be configured and antenna(s) positioned (including smart antenna systems and equipment capable of beamforming) for maximum e.i.r.p. towards the measuring antenna. This configuration/position shall be recorded for future use (see clause C.5.3.4 and clause C.5.4.4).


A test site as described in annex B and applicable measurement procedures as described in annex C shall be used.

Taking into account the calibration factor from the measurement site, the test procedure is further as described under clause 5.4.3.2.1.


#### 9.2.5 Test Results

TestMode	Antenna	Frequency[MHz]	EIRP PSD[dBm/MHz]	Limit[dBm/MHz]	Verdict
BLE_1M	Ant1	2402	7.18	10	PASS
BLE_1M	Ant1	2440	9.30	10	PASS
BLE_1M	Ant1	2480	9.55	10	PASS


Remark: All the modulation modes were tested, the data of the worst mode are described in the table.

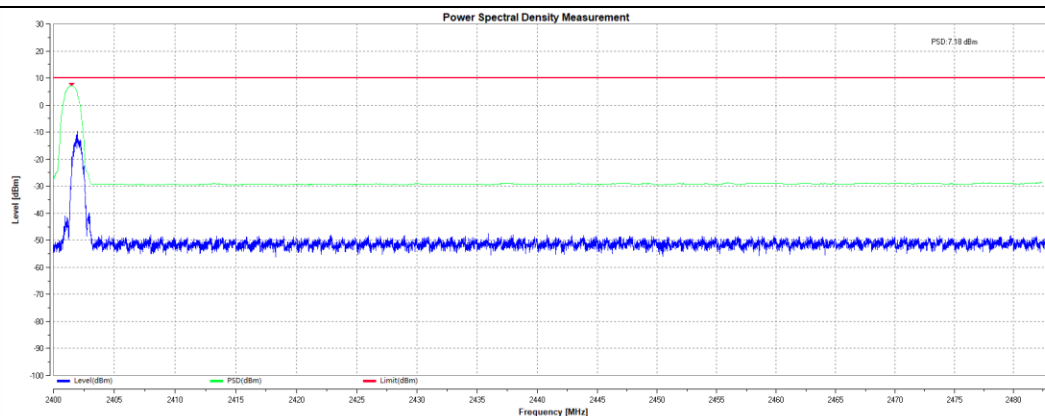

BLE\_1M-Ant1-2402-PASS

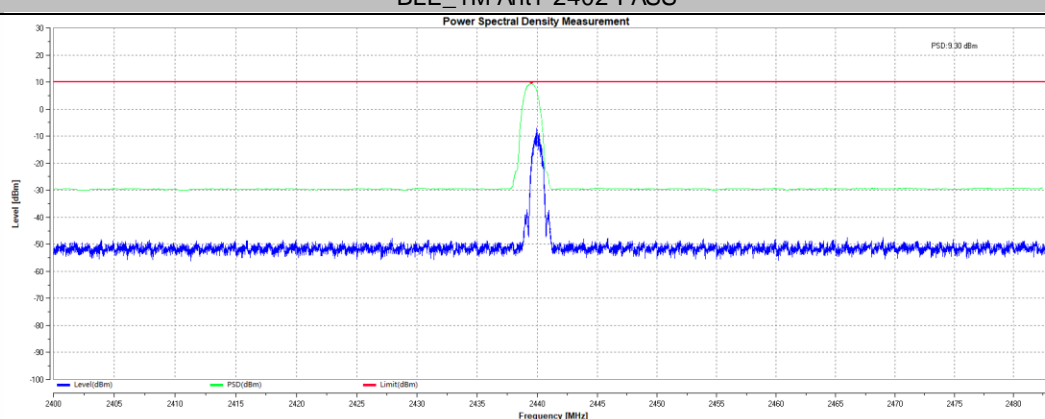

BLE\_1M-Ant1-2440-PASS

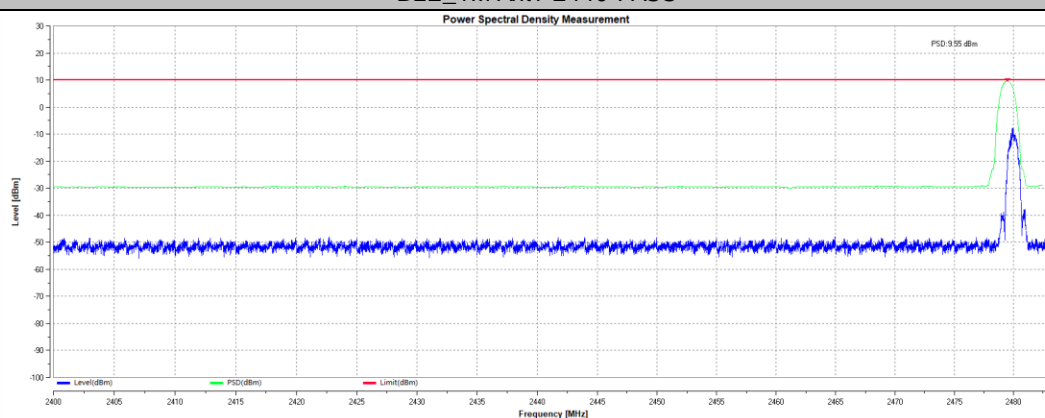

BLE\_1M-Ant1-2480-PASS

## 9.3 OCCUPIED CHANNEL BANDWIDTH

### 9.3.1 Applicable standard

ETSI EN 300 328 clause 4.3.2.7

### 9.3.2 Conformance Limit

The requirement applies to all types of equipment using wide band modulation other than FHSS

The occupied channel bandwidth is the bandwidth that contains 99% of the power of the signal

The Occupied Channel Bandwidth shall fall completely within the band 2400-2483.5MHz

In addition, for non-adaptive non-FHSS equipment with e.i.r.p. greater than 10 dBm, the Occupied Channel Bandwidth shall be equal to or less than 20 MHz

### 9.3.3 Test Configuration

The measurements for Occupied Channel Bandwidth shall only be performed at normal test conditions.

Radiated measurements shall only be used for integral antenna equipment that does not have a temporary antenna connector(s) provided.

Conducted measurements shall be used for antenna equipment provided a temporary antenna connector(s).

### 9.3.4 Test Procedure

1. Please refer to ETSI EN 300 328(V2.2.2) clause 5.4.7.1 for the test conditions.
2. Please refer to ETSI EN 300 328 (V2.2.2) clause 5.4.7.2 for the measurement method.

#### ■Conducted measurement

The measurement procedure shall be as follows:

##### Step 1:

Connect the UUT to the spectrum analyser and use the following settings:

- Centre Frequency: The centre frequency of the channel under test
- Resolution BW: ~ 1 % of the span without going below 1 %
- Video BW: 3 × RBW
- Frequency Span: 2 × Nominal Channel Bandwidth
- Detector Mode: RMS
- Trace Mode: Max Hold
- Sweep time: 1 s

##### Step 2:

Wait for the trace to stabilize.

Find the peak value of the trace and place the analyser marker on this peak.

##### Step 3:

Use the 99 % bandwidth function of the spectrum analyser to measure the Occupied Channel Bandwidth of the UUT.

This value shall be recorded.

Make sure that the power envelope is sufficiently above the noise floor of the analyser to avoid the noise signals left and right from the power envelope being taken into account by this measurement.

#### ■Radiated measurement

The test set up as described in annex B and the applicable measurement procedures described in annex C shall be used.

Alternatively, a test fixture may be used.

The test procedure is as described under clause 5.4.7.2.1.

### 9.3.5 Test Results


Temperature:	25°C		
Humidity:	45 % RH	Tested by:	CZF

TestMode	Antenna	Frequency[MHz]	OCB[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	1.047	2401.4885	2402.5355	2400 to 2483.5	PASS
BLE_1M	Ant1	2440	1.055	2439.4765	2440.5315	2400 to 2483.5	PASS
BLE_1M	Ant1	2480	1.051	2479.4805	2480.5315	2400 to 2483.5	PASS

Remark: All the modulation modes were tested, the data of the worst mode are described in the table.






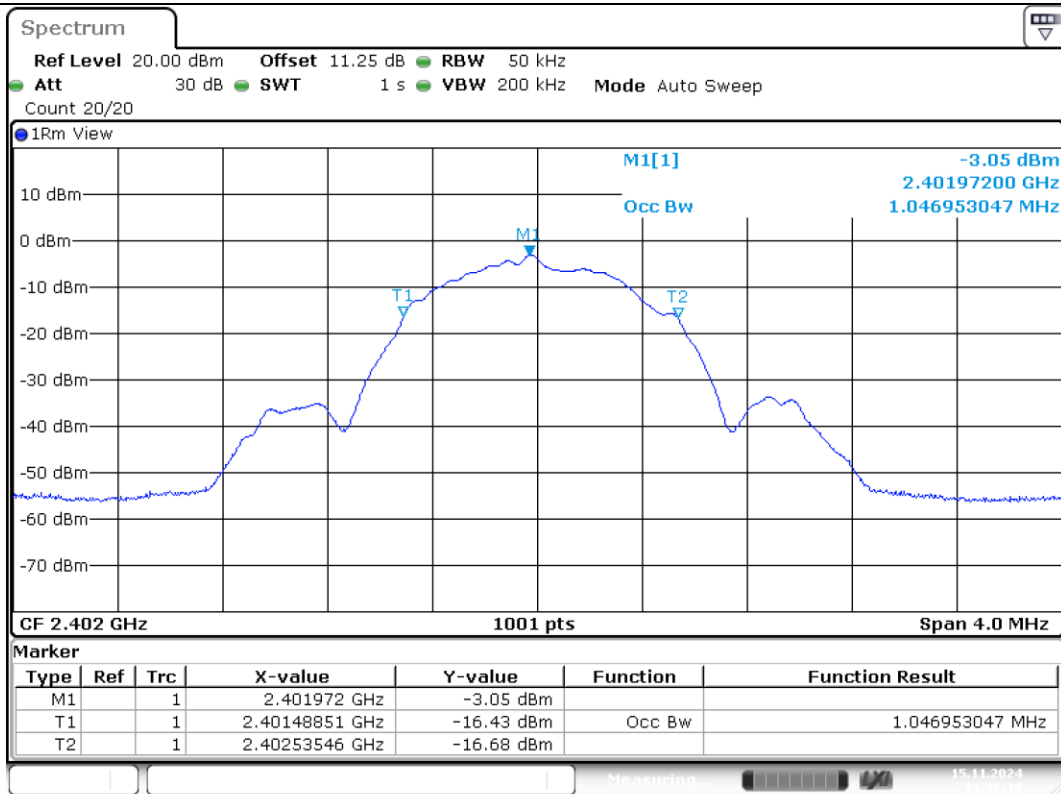


Date: 15.NOV.2024 14:06:19

## BLE\_1M-Ant1-2402-PASS

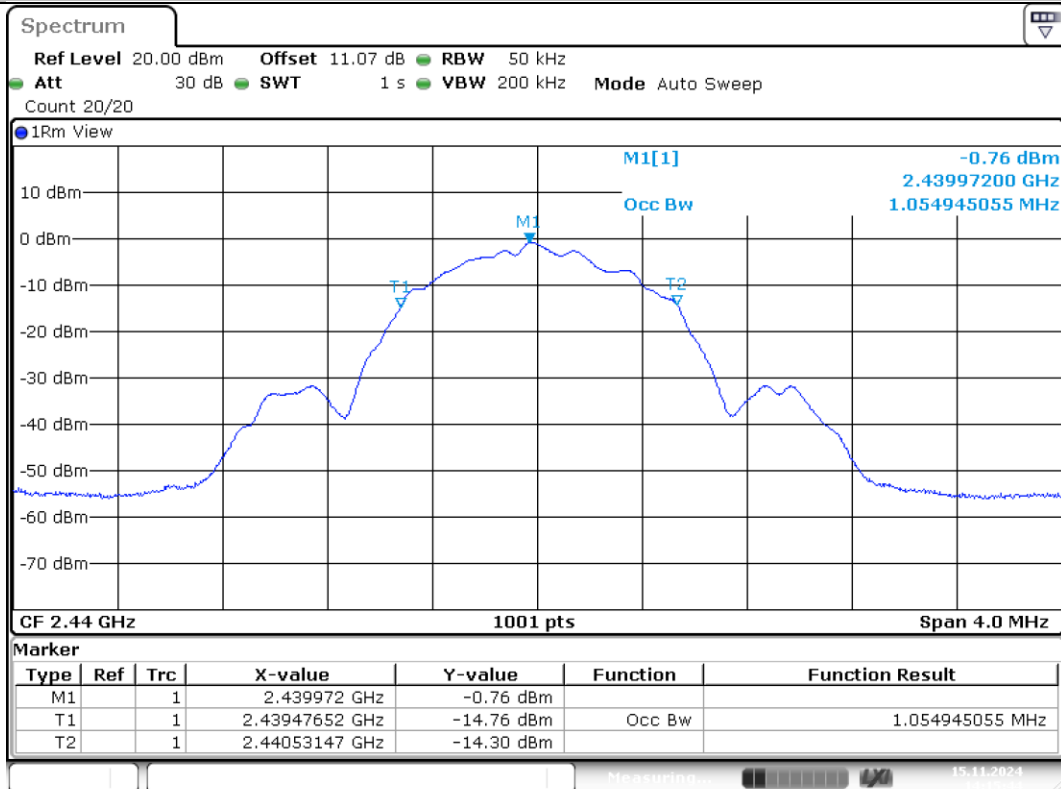

Date: 15.NOV.2024 14:15:44

## BLE\_1M-Ant1-2440-PASS

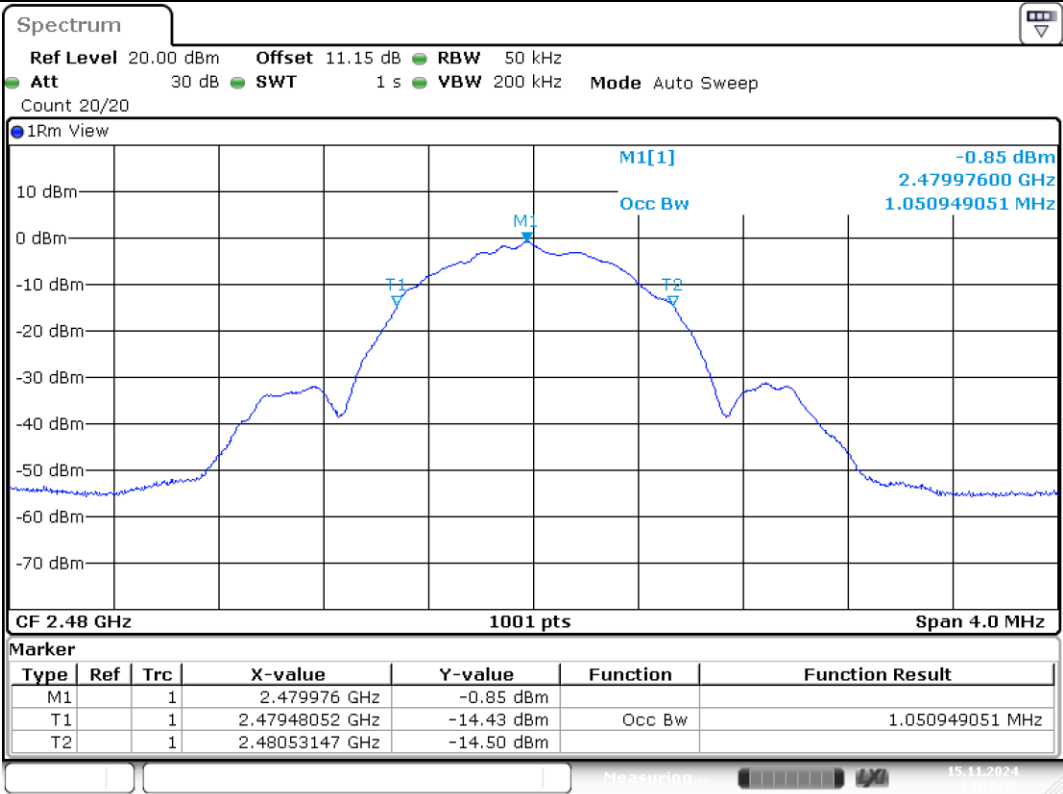

Date: 15.NOV.2024 14:18:40

BLE\_1M-Ant1-2480-PASS


## 9.4 TRANSMITTER UNWANTED EMISSION IN THE OUT-OF BAND

### 9.4.1 Applicable standard

ETSI EN 300 328 clause 4.3.2.8

### 9.4.2 Conformance Limit

The transmitter unwanted emissions in the out-of-band domain but outside the allocated band, shall not exceed the limits of the mask given in below figure.

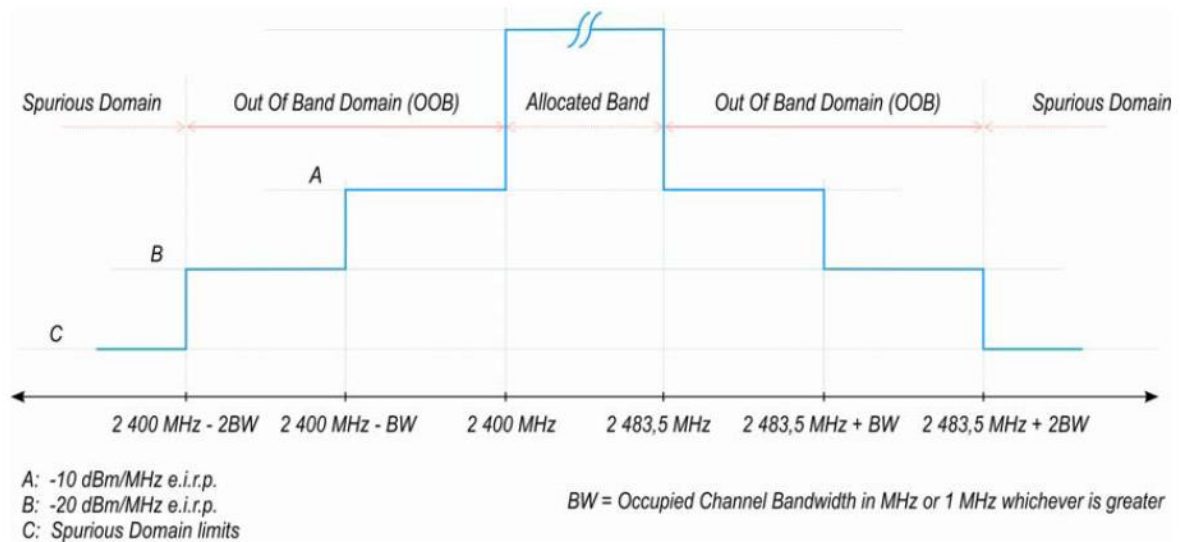

### 9.4.3 Test Configuration

The measurements for emission in the out-of band shall only be performed at normal test conditions.

Radiated measurements shall only be used for integral antenna equipment that does not have a temporary antenna connector(s) provided.

Conducted measurements shall be used for antenna equipment provided a temporary antenna connector(s).

### 9.4.4 Test Procedure

1. Please refer to ETSI EN 300 328 (V2.2.2) clause 5.4.8.1 for the test conditions.
2. Please refer to ETSI EN 300 328 (V2.2.2) clause 5.4.8.2 for the measurement method.

#### ■Conducted measurement

The applicable mask is defined by the measurement results from the tests performed under clause 5.4.7 (Occupied Channel Bandwidth).

The Out-of-band emissions within the different horizontal segments of the mask provided in figure 1 and figure 3 shall be measured using the procedure in step 1 to step 6 below. This method assumes the spectrum analyser is equipped with the Time Domain Power option.

Step 1:

- Connect the UUT to the spectrum analyser and use the following settings:

- Measurement Mode: Time Domain Power
- Centre Frequency: 2 484 MHz
- Span: 0 Hz
- Resolution BW: 1 MHz
- Filter mode: Channel filter
- Video BW: 3 MHz
- Detector Mode: RMS
- Trace Mode: Max Hold
- Sweep Mode: Single Sweep

- Sweep Points: Sweep time  $[\mu\text{s}] / (1 \mu\text{s})$  with a maximum of 30 000
- Trigger Mode: Video
- Sweep Time:  $> 120 \%$  of the duration of the longest burst detected during the measurement of the RF Output Power

Step 2 (segment 2 483,5 MHz to 2 483,5 MHz + BW):

- Adjust the trigger level to select the transmissions with the highest power level.
- For frequency hopping equipment operating in a normal hopping mode, the different hops will result in signal bursts with different power levels. In this case the burst with the highest power level shall be selected.
- Set a window (start and stop lines) to match with the start and end of the burst and in which the RMS power shall be measured using the Time Domain Power function.
- Select RMS power to be measured within the selected window and note the result which is the RMS power within this 1 MHz segment (2 483,5 MHz to 2 484,5 MHz). Compare this value with the applicable limit provided by the mask.
- Increase the centre frequency in steps of 1 MHz and repeat this measurement for every 1 MHz segment within the range 2 483,5 MHz to 2 483,5 MHz + BW. The centre frequency of the last 1 MHz segment shall be set to 2 483,5 MHz + BW - 0,5 MHz (which means this may partly overlap with the previous 1 MHz segment).

Step 3 (segment 2 483,5 MHz + BW to 2 483,5 MHz + 2BW):

- Change the centre frequency of the analyser to 2 484 MHz + BW and perform the measurement for the first 1 MHz segment within range 2 483,5 MHz + BW to 2 483,5 MHz + 2BW. Increase the centre frequency in 1 MHz steps and repeat the measurements to cover this whole range. The centre frequency of the last 1 MHz segment shall be set to 2 483,5 MHz + 2 BW - 0,5 MHz (which means this may partly overlap with the previous 1 MHz segment).

Step 4 (segment 2 400 MHz - BW to 2 400 MHz):

- Change the centre frequency of the analyser to 2 399,5 MHz and perform the measurement for the first 1 MHz segment within range 2 400 MHz - BW to 2 400 MHz. Reduce the centre frequency in 1 MHz steps and repeat the measurements to cover this whole range. The centre frequency of the last 1 MHz segment shall be set to 2 400 MHz - BW + 0,5 MHz (which means this may partly overlap with the previous 1 MHz segment).

Step 5 (segment 2 400 MHz - 2BW to 2 400 MHz - BW):

- Change the centre frequency of the analyser to 2 399,5 MHz - BW and perform the measurement for the first 1 MHz segment within range 2 400 MHz - 2BW to 2 400 MHz - BW. Reduce the centre frequency in 1 MHz steps and repeat the measurements to cover this whole range. The centre frequency of the last 1 MHz segment shall be set to 2 400 MHz - 2BW + 0,5 MHz (which means this may partly overlap with the previous 1 MHz segment).

Step 6:

- In case of conducted measurements on equipment with a single transmit chain, the declared antenna assembly gain "G" in dBi shall be added to the results for each of the 1 MHz segments and compared with the limits provided by the mask given in figure 1 or figure 3. If more than one antenna assembly is intended for this power setting, the antenna with the highest gain shall be considered.
- In case of conducted measurements on smart antenna systems (equipment with multiple transmit chains), the measurements need to be repeated for each of the active transmit chains. The declared antenna assembly gain "G" in dBi for a single antenna shall be added to these results. If more than one antenna assembly is intended for this power setting, the antenna with the highest gain shall be considered.

Comparison with the applicable limits shall be done using any of the options given below:

- Option 1: the results for each of the transmit chains for the corresponding 1 MHz segments shall be added. The additional beamforming gain "Y" in dB shall be added as well and the resulting values compared with the limits provided by the mask given in figure 1 or figure 3.
- Option 2: the limits provided by the mask given in figure 1 or figure 3 shall be reduced by  $10 \times \log_{10}(\text{Ach})$  and the additional beamforming gain "Y" in dB. The results for each of the transmit chains shall be individually compared with these reduced limits.

NOTE: Ach refers to the number of active transmit chains.

It shall be recorded whether the equipment complies with the mask provided in figure 1 or figure 3.

#### ■ Radiated measurement

The test set up as described in annex B and the applicable measurement procedures described in annex C shall be used. Alternatively a test fixture may be used.

The test procedure is as described under clause 5.4.8.2.1.

#### 9.4.5 Test Results


PASS.

TestMode	Antenna	Frequency[MHz]	Freq. [MHz]	Level[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	2360.5	-53.85	-20.00	PASS
BLE_1M	Ant1	2402	2361.5	-53.59	-20.00	PASS
BLE_1M	Ant1	2402	2362.5	-53.31	-20.00	PASS
BLE_1M	Ant1	2402	2363.5	-53.68	-20.00	PASS
BLE_1M	Ant1	2402	2364.5	-53.58	-20.00	PASS
BLE_1M	Ant1	2402	2365.5	-53.79	-20.00	PASS
BLE_1M	Ant1	2402	2366.5	-53.89	-20.00	PASS
BLE_1M	Ant1	2402	2367.5	-53.67	-20.00	PASS
BLE_1M	Ant1	2402	2368.5	-53.55	-20.00	PASS
BLE_1M	Ant1	2402	2369.5	-53.20	-20.00	PASS
BLE_1M	Ant1	2402	2370.5	-53.29	-20.00	PASS
BLE_1M	Ant1	2402	2371.5	-53.59	-20.00	PASS
BLE_1M	Ant1	2402	2372.5	-53.82	-20.00	PASS
BLE_1M	Ant1	2402	2373.5	-53.64	-20.00	PASS
BLE_1M	Ant1	2402	2374.5	-53.08	-20.00	PASS
BLE_1M	Ant1	2402	2375.5	-53.37	-20.00	PASS
BLE_1M	Ant1	2402	2376.5	-53.55	-20.00	PASS
BLE_1M	Ant1	2402	2377.5	-53.87	-20.00	PASS
BLE_1M	Ant1	2402	2378.5	-53.71	-20.00	PASS
BLE_1M	Ant1	2402	2379.5	-53.77	-20.00	PASS
BLE_1M	Ant1	2402	2380.5	-53.64	-10.00	PASS
BLE_1M	Ant1	2402	2381.5	-53.29	-10.00	PASS
BLE_1M	Ant1	2402	2382.5	-53.55	-10.00	PASS
BLE_1M	Ant1	2402	2383.5	-53.25	-10.00	PASS
BLE_1M	Ant1	2402	2384.5	-53.27	-10.00	PASS
BLE_1M	Ant1	2402	2385.5	-53.15	-10.00	PASS
BLE_1M	Ant1	2402	2386.5	-53.65	-10.00	PASS
BLE_1M	Ant1	2402	2387.5	-53.67	-10.00	PASS
BLE_1M	Ant1	2402	2388.5	-53.54	-10.00	PASS
BLE_1M	Ant1	2402	2389.5	-53.06	-10.00	PASS
BLE_1M	Ant1	2402	2390.5	-53.09	-10.00	PASS
BLE_1M	Ant1	2402	2391.5	-52.49	-10.00	PASS
BLE_1M	Ant1	2402	2392.5	-52.81	-10.00	PASS
BLE_1M	Ant1	2402	2393.5	-51.89	-10.00	PASS
BLE_1M	Ant1	2402	2394.5	-53.05	-10.00	PASS
BLE_1M	Ant1	2402	2395.5	-49.17	-10.00	PASS
BLE_1M	Ant1	2402	2396.5	-52.42	-10.00	PASS
BLE_1M	Ant1	2402	2397.5	-48.63	-10.00	PASS
BLE_1M	Ant1	2402	2398.5	-51.12	-10.00	PASS
BLE_1M	Ant1	2402	2399.5	-44.46	-10.00	PASS
BLE_1M	Ant1	2402	2484	-52.75	-10.00	PASS
BLE_1M	Ant1	2402	2485	-52.91	-10.00	PASS
BLE_1M	Ant1	2402	2486	-53.42	-10.00	PASS
BLE_1M	Ant1	2402	2487	-53.35	-10.00	PASS
BLE_1M	Ant1	2402	2488	-53.11	-10.00	PASS
BLE_1M	Ant1	2402	2489	-53.36	-10.00	PASS
BLE_1M	Ant1	2402	2490	-53.16	-10.00	PASS
BLE_1M	Ant1	2402	2491	-52.94	-10.00	PASS
BLE_1M	Ant1	2402	2492	-52.60	-10.00	PASS
BLE_1M	Ant1	2402	2493	-53.13	-10.00	PASS
BLE_1M	Ant1	2402	2494	-52.89	-10.00	PASS
BLE_1M	Ant1	2402	2495	-53.52	-10.00	PASS
BLE_1M	Ant1	2402	2496	-52.75	-10.00	PASS
BLE_1M	Ant1	2402	2497	-53.45	-10.00	PASS
BLE_1M	Ant1	2402	2498	-52.89	-10.00	PASS
BLE_1M	Ant1	2402	2499	-53.05	-10.00	PASS
BLE_1M	Ant1	2402	2500	-53.07	-10.00	PASS


BLE_1M	Ant1	2402	2501	-53.15	-10.00	PASS
BLE_1M	Ant1	2402	2502	-53.10	-10.00	PASS
BLE_1M	Ant1	2402	2503	-53.18	-10.00	PASS
BLE_1M	Ant1	2402	2504	-53.18	-20.00	PASS
BLE_1M	Ant1	2402	2505	-53.21	-20.00	PASS
BLE_1M	Ant1	2402	2506	-53.22	-20.00	PASS
BLE_1M	Ant1	2402	2507	-53.30	-20.00	PASS
BLE_1M	Ant1	2402	2508	-51.73	-20.00	PASS
BLE_1M	Ant1	2402	2509	-52.97	-20.00	PASS
BLE_1M	Ant1	2402	2510	-51.67	-20.00	PASS
BLE_1M	Ant1	2402	2511	-53.06	-20.00	PASS
BLE_1M	Ant1	2402	2512	-52.63	-20.00	PASS
BLE_1M	Ant1	2402	2513	-52.64	-20.00	PASS
BLE_1M	Ant1	2402	2514	-53.32	-20.00	PASS
BLE_1M	Ant1	2402	2515	-53.13	-20.00	PASS
BLE_1M	Ant1	2402	2516	-52.88	-20.00	PASS
BLE_1M	Ant1	2402	2517	-52.94	-20.00	PASS
BLE_1M	Ant1	2402	2518	-52.89	-20.00	PASS
BLE_1M	Ant1	2402	2519	-52.94	-20.00	PASS
BLE_1M	Ant1	2402	2520	-53.22	-20.00	PASS
BLE_1M	Ant1	2402	2521	-53.15	-20.00	PASS
BLE_1M	Ant1	2402	2522	-52.93	-20.00	PASS
BLE_1M	Ant1	2402	2523	-53.23	-20.00	PASS
BLE_1M	Ant1	2480	2360.5	-54.01	-20.00	PASS
BLE_1M	Ant1	2480	2361.5	-53.77	-20.00	PASS
BLE_1M	Ant1	2480	2362.5	-53.51	-20.00	PASS
BLE_1M	Ant1	2480	2363.5	-53.59	-20.00	PASS
BLE_1M	Ant1	2480	2364.5	-53.74	-20.00	PASS
BLE_1M	Ant1	2480	2365.5	-54.01	-20.00	PASS
BLE_1M	Ant1	2480	2366.5	-53.78	-20.00	PASS
BLE_1M	Ant1	2480	2367.5	-53.84	-20.00	PASS
BLE_1M	Ant1	2480	2368.5	-53.91	-20.00	PASS
BLE_1M	Ant1	2480	2369.5	-53.65	-20.00	PASS
BLE_1M	Ant1	2480	2370.5	-53.93	-20.00	PASS
BLE_1M	Ant1	2480	2371.5	-53.88	-20.00	PASS
BLE_1M	Ant1	2480	2372.5	-53.96	-20.00	PASS
BLE_1M	Ant1	2480	2373.5	-53.65	-20.00	PASS
BLE_1M	Ant1	2480	2374.5	-53.71	-20.00	PASS
BLE_1M	Ant1	2480	2375.5	-53.75	-20.00	PASS
BLE_1M	Ant1	2480	2376.5	-54.02	-20.00	PASS
BLE_1M	Ant1	2480	2377.5	-53.94	-20.00	PASS
BLE_1M	Ant1	2480	2378.5	-53.59	-20.00	PASS
BLE_1M	Ant1	2480	2379.5	-53.56	-20.00	PASS
BLE_1M	Ant1	2480	2380.5	-53.54	-10.00	PASS
BLE_1M	Ant1	2480	2381.5	-53.58	-10.00	PASS
BLE_1M	Ant1	2480	2382.5	-53.79	-10.00	PASS
BLE_1M	Ant1	2480	2383.5	-53.41	-10.00	PASS
BLE_1M	Ant1	2480	2384.5	-53.18	-10.00	PASS
BLE_1M	Ant1	2480	2385.5	-53.21	-10.00	PASS
BLE_1M	Ant1	2480	2386.5	-53.20	-10.00	PASS
BLE_1M	Ant1	2480	2387.5	-53.60	-10.00	PASS
BLE_1M	Ant1	2480	2388.5	-53.42	-10.00	PASS
BLE_1M	Ant1	2480	2389.5	-53.51	-10.00	PASS
BLE_1M	Ant1	2480	2390.5	-53.76	-10.00	PASS
BLE_1M	Ant1	2480	2391.5	-53.15	-10.00	PASS
BLE_1M	Ant1	2480	2392.5	-53.76	-10.00	PASS
BLE_1M	Ant1	2480	2393.5	-53.66	-10.00	PASS
BLE_1M	Ant1	2480	2394.5	-53.72	-10.00	PASS
BLE_1M	Ant1	2480	2395.5	-53.52	-10.00	PASS
BLE_1M	Ant1	2480	2396.5	-53.68	-10.00	PASS
BLE_1M	Ant1	2480	2397.5	-53.84	-10.00	PASS
BLE_1M	Ant1	2480	2398.5	-53.04	-10.00	PASS




BLE_1M	Ant1	2480	2399.5	-51.69	-10.00	PASS
BLE_1M	Ant1	2480	2484	-48.38	-10.00	PASS
BLE_1M	Ant1	2480	2485	-49.86	-10.00	PASS
BLE_1M	Ant1	2480	2486	-47.64	-10.00	PASS
BLE_1M	Ant1	2480	2487	-48.15	-10.00	PASS
BLE_1M	Ant1	2480	2488	-52.30	-10.00	PASS
BLE_1M	Ant1	2480	2489	-52.00	-10.00	PASS
BLE_1M	Ant1	2480	2490	-52.75	-10.00	PASS
BLE_1M	Ant1	2480	2491	-51.46	-10.00	PASS
BLE_1M	Ant1	2480	2492	-52.65	-10.00	PASS
BLE_1M	Ant1	2480	2493	-52.36	-10.00	PASS
BLE_1M	Ant1	2480	2494	-52.61	-10.00	PASS
BLE_1M	Ant1	2480	2495	-52.84	-10.00	PASS
BLE_1M	Ant1	2480	2496	-52.85	-10.00	PASS
BLE_1M	Ant1	2480	2497	-52.83	-10.00	PASS
BLE_1M	Ant1	2480	2498	-52.93	-10.00	PASS
BLE_1M	Ant1	2480	2499	-52.68	-10.00	PASS
BLE_1M	Ant1	2480	2500	-52.96	-10.00	PASS
BLE_1M	Ant1	2480	2501	-52.94	-10.00	PASS
BLE_1M	Ant1	2480	2502	-53.01	-10.00	PASS
BLE_1M	Ant1	2480	2503	-53.14	-10.00	PASS
BLE_1M	Ant1	2480	2504	-53.06	-20.00	PASS
BLE_1M	Ant1	2480	2505	-53.06	-20.00	PASS
BLE_1M	Ant1	2480	2506	-52.66	-20.00	PASS
BLE_1M	Ant1	2480	2507	-53.10	-20.00	PASS
BLE_1M	Ant1	2480	2508	-51.81	-20.00	PASS
BLE_1M	Ant1	2480	2509	-53.10	-20.00	PASS
BLE_1M	Ant1	2480	2510	-51.79	-20.00	PASS
BLE_1M	Ant1	2480	2511	-52.94	-20.00	PASS
BLE_1M	Ant1	2480	2512	-53.11	-20.00	PASS
BLE_1M	Ant1	2480	2513	-52.64	-20.00	PASS
BLE_1M	Ant1	2480	2514	-53.02	-20.00	PASS
BLE_1M	Ant1	2480	2515	-53.18	-20.00	PASS
BLE_1M	Ant1	2480	2516	-53.19	-20.00	PASS
BLE_1M	Ant1	2480	2517	-52.82	-20.00	PASS
BLE_1M	Ant1	2480	2518	-52.49	-20.00	PASS
BLE_1M	Ant1	2480	2519	-52.77	-20.00	PASS
BLE_1M	Ant1	2480	2520	-53.22	-20.00	PASS
BLE_1M	Ant1	2480	2521	-53.18	-20.00	PASS
BLE_1M	Ant1	2480	2522	-53.10	-20.00	PASS
BLE_1M	Ant1	2480	2523	-53.05	-20.00	PASS

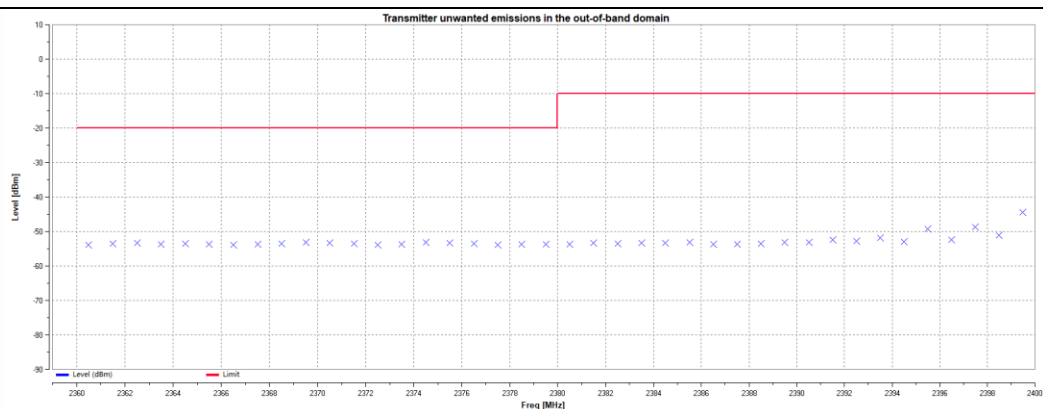


BLE\_1M-Ant1-2402-PASS

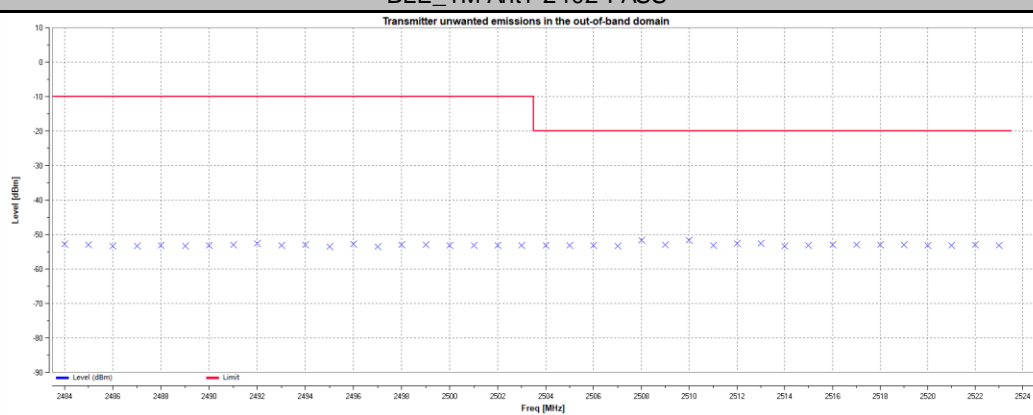

BLE\_1M-Ant1-2402-PASS

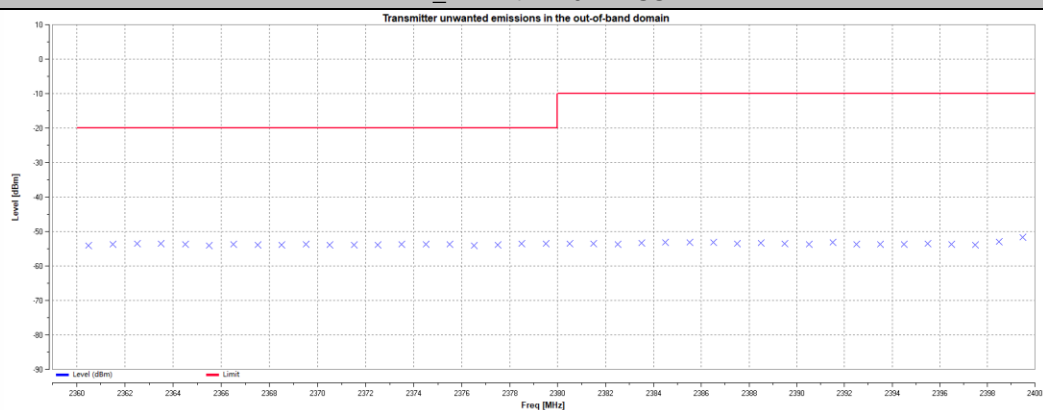

BLE\_1M-Ant1-2480-PASS

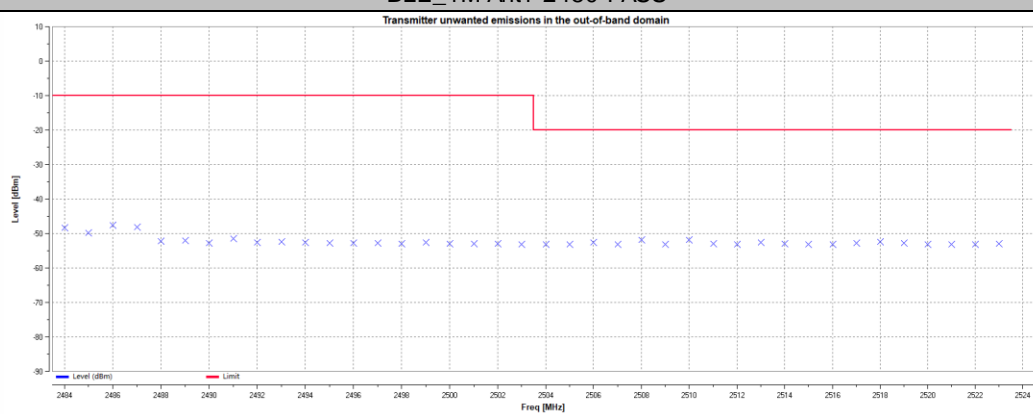

BLE\_1M-Ant1-2480-PASS



## 9.5 TRANSMITTER UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN

### 9.5.1 Applicable standard

ETSI EN 300 328 clause 4.3.2.9

### 9.5.2 Conformance Limit

The transmitter unwanted emissions in the spurious domain shall not exceed the values given in below. In case of equipment with antenna connectors, these limits apply to emissions at the antenna port (conducted). For emissions radiated by the cabinet or emissions radiated by integral antenna equipment (without antenna connectors), these limits are e.r.p. for emissions up to 1 GHz and as e.i.r.p. for emissions above 1 GHz.

Frequency Range	Maximum power	bandwidth
30 MHz to 47 MHz	-36dBm	100kHz
47 MHz to 74 MHz	-54dBm	100kHz
74 MHz to 87.5 MHz	-36dBm	100kHz
87.5MHz to118 MHz	-54dBm	100kHz
118 MHz to174MHz	-36dBm	100kHz
174MHz to 230MHz	-54dBm	100kHz
230 MHz to 470 MHz	-36dBm	100kHz
470 MHz to 694 MHz	-54dBm	100kHz
694 MHz to1 GHz	-36dBm	100kHz
1GHz to12.75 GHz	-30dBm	1MHz

### 9.5.3 Test Configuration

The measurements for emissions in the spurious domain shall only be performed at normal test conditions.

Radiated measurements shall be used for equipment.

Conducted measurements shall be used for equipment.

### 9.5.4 Test Procedure

1. Please refer to ETSI EN 300 328 (V2.2.2) clause 5.4.9.1 for the test conditions.
2. Please refer to ETSI EN 300 328 (V2.2.2) clause 5.4.9.2 for the measurement methods.

#### ■Conducted measurement

##### ●Introduction

The spectrum in the spurious domain (see figure 1 or figure 3) shall be searched for emissions that exceed the limit values given in table 4 or table 12 or that come to within 6 dB below these limits. Each occurrence shall be recorded.

The measurement procedure contains 2 parts.

##### ●Pre-scan

The test procedure below shall be used to identify potential unwanted emissions of the UUT.

Step 1:

The sensitivity of the measurement set-up should be such that the noise floor is at least 12 dB below the limits given in table 4 or table 12.

Step 2:

The emissions over the range 30 MHz to 1 000 MHz shall be identified.

Spectrum analyser settings:

- Resolution bandwidth: 100 kHz
- Video bandwidth: 300 kHz
- Filter type: 3 dB (Gaussian)

- Detector mode: Peak
  - Trace Mode: Max Hold
  - Sweep Points:  $\geq 19\,400$ ; For spectrum analysers not supporting this high number of sweep points, the frequency band may need to be segmented.
  - Sweep time: For non continuous transmissions (duty cycle less than 100 %), the sweep time shall be sufficiently long, such that for each 100 kHz frequency step, the measurement time is greater than two transmissions of the UUT, on any channel.  
For Frequency Hopping equipment operating in a normal operating (hopping not disabled) mode, the sweep time shall be further increased to capture multiple transmissions on any of the hopping frequencies. The above sweep time setting may result in long measuring times in case of frequency hopping equipment. To avoid such long measuring times, an FFT analyser could be used.
- Allow the trace to stabilize. Any emissions identified during the sweeps above and that fall within the 6 dB range below the applicable limit or above, shall be individually measured using the procedure in clause 5.4.9.2.1.3 and compared to the limits given in table 4 or table 12.

#### Step 3:

The emissions over the range 1 GHz to 12,75 GHz shall be identified.

Spectrum analyser settings:

- Resolution bandwidth: 1 MHz
- Video bandwidth: 3 MHz
- Filter type: 3 dB (Gaussian)
- Detector mode: Peak
- Trace Mode: Max Hold
- Sweep Points:  $\geq 23\,500$ ; For spectrum analysers not supporting this high number of sweep points, the frequency band may need to be segmented.
- Sweep time: For non continuous transmissions (duty cycle less than 100 %), the sweep time shall be sufficiently long, such that for each 1 MHz frequency step, the measurement time is greater than two transmissions of the UUT, on any channel.

For Frequency Hopping equipment operating in a normal operating (hopping not disabled) mode, the sweep time shall be further increased to capture multiple transmissions on any of the hopping frequencies. The above sweep time setting may result in long measuring times in case of frequency hopping equipment. To avoid such long measuring times, an FFT analyser could be used.

Allow the trace to stabilize. Any emissions identified during the sweeps above that fall within the 6 dB range below the applicable limit or above, shall be individually measured using the procedure in clause 5.4.9.2.1.3 and compared to the limits given in table 4 or table 12.

Frequency Hopping equipment may generate a block (or several blocks) of spurious emissions anywhere within the spurious domain. If this is the case, only the highest peak of each block of emissions shall be measured using the procedure in clause 5.4.9.2.1.3.

#### Step 4:

• In case of conducted measurements on smart antenna systems (equipment with multiple transmit chains), step 2 and step 3 need to be repeated for each of the active transmit chains (Ach). The limits used to identify emissions during this pre-scan need to be reduced with  $10 \times \log_{10} (Ach)$  (number of active transmit chains).

#### ● Measurement of the emissions identified during the pre-scan

The procedure in step 1 to step 4 below shall be used to accurately measure the individual unwanted emissions identified during the pre-scan measurements above. This method assumes the spectrum analyser has a Time Domain Power function.

#### Step 1:

The level of the emissions shall be measured using the following spectrum analyser settings:

- Measurement Mode: Time Domain Power
- Centre Frequency: Frequency of the emission identified during the pre-scan
- Resolution Bandwidth: 100 kHz ( $< 1$  GHz) / 1 MHz ( $> 1$  GHz)
- Video Bandwidth: 300 kHz ( $< 1$  GHz) / 3 MHz ( $> 1$  GHz)
- Frequency Span: Zero Span
- Sweep mode: Single Sweep
- Sweep time:  $> 120\%$  of the duration of the longest burst detected during the measurement of the RF Output Power
- Sweep points: Sweep time [ $\mu$ s] / (1  $\mu$ s) with a maximum of 30 000
- Trigger: Video (burst signals) or Manual (continuous signals)

- Detector: RMS

Step 2:

- Set a window where the start and stop indicators match the start and end of the burst with the highest level and record the value of the power measured within this window. If the spurious emission to be measured is a continuous transmission, the measurement window shall be set to match the start and stop times of the sweep.

Step 3:

In case of conducted measurements on smart antenna systems (equipment with multiple transmit chains), step 2 needs to be repeated for each of the active transmit chains (Ach).

Sum the measured power (within the observed window) for each of the active transmit chains.

Step 4:

The value defined in step 3 shall be compared to the limits defined in table 4 or table 12.

■ Radiated measurement

The test site as described in annex B and applicable measurement procedures as described in annex C shall be used.

The test procedure is further as described under clause 5.4.9.2.1.



### 9.5.5 Test Results

#### ■Radiated measurement

Emissions In the Spurious Domain below 1GHz.

Operation Mode:	<input checked="" type="checkbox"/> GFSK	IM
Operation frequency:	<input checked="" type="checkbox"/> 2402MHz	<input type="checkbox"/> 2480MHz
Temperature:	25°C	Tested by: CZF
Humidity:	60 % RH	

Frequency (MHz)	Antenna Polarization	Emission level (dBm)	Limit (dBm)	Verdict
54.0608	<input checked="" type="checkbox"/> V	-62.52	-54.00	PASS
349.5819		-73.40	-36.00	PASS
419.0478		-60.13	-36.00	PASS
648.0136		-62.54	-54.00	PASS
720.196		-67.93	-36.00	PASS
964.4909		-68.41	-36.00	PASS
40.8662	<input checked="" type="checkbox"/> H	-72.27	-36.00	PASS
246.1592		-75.46	-36.00	PASS
420.212		-67.59	-36.00	PASS
624.1468		-64.12	-54.00	PASS
756.0932		-68.60	-36.00	PASS
974.5809		-67.37	-36.00	PASS

Emissions In the Spurious Domain above 1GHz.

Operation Mode: ☒GFSK

Operation frequency: ☒2402MHz ☐2480MHz

Temperature: 25°C

Tested by: CZF

Humidity: 60 % RH

Frequency (MHz)	Antenna Polarization		Emission level (dBm)	Limit (dBm)	Verdict
2303.460	<input checked="" type="checkbox"/> V	<input type="checkbox"/> conducted	-53.32	-30.00	PASS
4515.453			-48.64	-30.00	PASS
6678.435			-43.64	-30.00	PASS
8693.188			-36.60	-30.00	PASS
10471.94			-36.44	-30.00	PASS
11753.35			-37.29	-30.00	PASS
2187.437	<input checked="" type="checkbox"/> H		-52.69	-30.00	PASS
4825.565			-48.34	-30.00	PASS
6633.576			-43.80	-30.00	PASS
8706.841			-36.98	-30.00	PASS
10733.29			-37.04	-30.00	PASS
12539.35			-36.86	-30.00	PASS

Remark: All the modulation modes were tested, the data of the worst mode are described in the table.

## 9.6 RECEIVER SPURIOUS EMISSIONS

### 9.6.1 Applicable standard

ETSI EN 300 328 clause 4.3.2.10

### 9.6.2 Conformance Limit

The spurious emissions of the receiver shall not exceed the values given in below.

In case of equipment with antenna connectors, these limits apply to emissions at the antenna port (conducted). For emissions radiated by the cabinet or emissions radiated by integral antenna equipment (without antenna connectors), these limits are e.r.p. for emissions up to 1 GHz and e.i.r.p. for emissions above 1 GHz.

Frequency Range	Maximum power	Measurement Width
30 MHz to 1 GHz	-57 dBm	100kHz
1 GHz to 12.75 GHz	-47 dBm	1MHz

### 9.6.3 Test Configuration

The measurements for emissions in the spurious domain shall only be performed at normal test conditions.

Radiated measurements shall be used for equipment.

Conducted measurements shall be used for equipment.

### 9.6.4 Test Procedure

1. Please refer to ETSI EN 300 328 (V2.2.2) clause 5.4.11.1 for the test conditions.
2. Please refer to ETSI EN 300 328 (V2.2.2) clause 5.4.11.2 for the measurement methods.

#### ■Conducted measurement

##### ●Introduction

The spectrum in the spurious domain (see figure 1 or figure 3) shall be searched for emissions that exceed the limit values given in table 4 or table 12 or that come to within 6 dB below these limits. Each occurrence shall be recorded.

The measurement procedure contains 2 parts.

##### ●Pre-scan

The test procedure below shall be used to identify potential unwanted emissions of the UUT.

Step 1:

The sensitivity of the spectrum analyser should be such that the noise floor is at least 12 dB below the limits given in table 5 or table 13.

Step 2:

The emissions over the range 30 MHz to 1 000 MHz shall be identified.

Spectrum analyser settings:

- Resolution bandwidth: 100 kHz
- Video bandwidth: 300 kHz
- Filter type: 3 dB (Gaussian)
- Detector mode: Peak
- Trace Mode: Max Hold
- Sweep Points:  $\geq 19\,400$ ;
- Sweep time: Auto

Wait for the trace to stabilize. Any emissions identified during the sweeps above and that fall within the 6 dB range below the applicable limit or above, shall be individually measured using the procedure in clause 5.4.10.2.1.3 and compared to the limits given in table 5 or table 13.

Step 3:

The emissions over the range 1 GHz to 12,75 GHz shall be identified.

Spectrum analyser settings:

- Resolution bandwidth: 1 MHz
- Video bandwidth: 3 MHz
- Filter type: 3 dB (Gaussian)
- Detector mode: Peak
- Trace Mode: Max Hold
- Sweep Points:  $\geq 23\ 500$ ; For spectrum analysers not supporting this high number of sweep points, the frequency band may need to be segmented.
- Sweep time: Auto

Wait for the trace to stabilize. Any emissions identified during the sweeps above that fall within the 6 dB range below the applicable limit or above, shall be individually measured using the procedure in clause 5.4.10.2.1.3 and compared to the limits given in table 5 or table 13.

FHSS equipment may generate a block (or several blocks) of spurious emissions anywhere within the spurious domain. If this is the case, only the highest peak of each block of emissions shall be measured using the procedure in clause 5.4.10.2.1.3.

Step 4:

• In case of conducted measurements on smart antenna systems (equipment with multiple transmit chains), step 2 and step 3 need to be repeated for each of the active transmit chains (Ach). The limits used to identify emissions during this pre-scan need to be reduced with  $10 \times \log_{10} (Ach)$  (number of active transmit chains).

● Measurement of the emissions identified during the pre-scan

The procedure in step 1 to step 4 below shall be used to accurately measure the individual unwanted emissions identified during the pre-scan measurements above. This method assumes the spectrum analyser has a Time Domain Power function.

Step 1:

The level of the emissions shall be measured using the following spectrum analyser settings:

- Measurement Mode: Time Domain Power
- Centre Frequency: Frequency of the emission identified during the pre-scan
- Resolution Bandwidth: 100 kHz ( $< 1\text{ GHz}$ ) / 1 MHz ( $> 1\text{ GHz}$ )
- Video Bandwidth: 300 kHz ( $< 1\text{ GHz}$ ) / 3 MHz ( $> 1\text{ GHz}$ )
- Frequency Span: Zero Span
- Sweep mode: Single Sweep
- Sweep time: 30ms
- Sweep points:  $\geq 30\ 000$
- Trigger: Video (burst signals) or Manual (continuous signals)
- Detector: RMS

Step 2:

• Set a window where the start and stop indicators match the start and end of the burst with the highest level and record the value of the power measured within this window. If the spurious emission to be measured is a continuous transmission, the measurement window shall be set to match the start and stop times of the sweep.

Step 3:

In case of conducted measurements on smart antenna systems (equipment with multiple transmit chains), step 2 needs to be repeated for each of the active transmit chains (Ach).

Sum the measured power (within the observed window) for each of the active transmit chains.

Step 4:

The value defined in step 3 shall be compared to the limits defined in table 4 or table 12.

■ Radiated measurement

The test site as described in annex B and applicable measurement procedures as described in annex C shall be used.

The test procedure is further as described under clause 5.4.9.2.1.



### 9.6.5 Test Results

#### ■Radiated measurement

Emissions In the Spurious Domain below 1GHz.

Operation Mode:

☒GFSK

Operation frequency:

☒2402MHz
 ☐2480MHz

Temperature:

25°C

Tested by:

CZF

Humidity:

60 % RH

Frequency (MHz)	Antenna Polarization		Emission level (dBm)	Limit (dBm)	Verdict
31.9404	<input checked="" type="checkbox"/> V	<input type="checkbox"/> conducted	-79.23	-57.00	PASS
54.0608			-62.91	-57.00	PASS
418.4657			-59.23	-57.00	PASS
484.0508			-61.36	-57.00	PASS
648.0136			-62.90	-57.00	PASS
720.196			-65.97	-57.00	PASS
981.7604			-68.19	-57.00	PASS
40.8662	<input checked="" type="checkbox"/> H		-74.24	-57.00	PASS
253.1446			-75.93	-57.00	PASS
417.6895			-69.00	-57.00	PASS
648.0136			-64.23	-57.00	PASS
763.8548			-69.51	-57.00	PASS
982.7305			-68.11	-57.00	PASS

Emissions In the Spurious Domain above 1GHz.

Operation Mode:

☒GFSK

Operation frequency:

☒2402MHz

☐2480MHz

Temperature:

25°C

Tested by:

CZF

Humidity:

60 % RH

Frequency (MHz)	Antenna Polarization		Emission level (dBm)	Limit (dBm)	Verdict
2296.259	<input checked="" type="checkbox"/> V	<input type="checkbox"/> conducted	-68.32	-47.00	PASS
4675.385			-64.40	-47.00	PASS
6861.772			-59.71	-47.00	PASS
8369.423			-54.64	-47.00	PASS
10473.89			-54.40	-47.00	PASS
12603.72			-54.06	-47.00	PASS
2197.839	<input checked="" type="checkbox"/> H		-69.08	-47.00	PASS
4802.160			-64.25	-47.00	PASS
6547.759			-58.78	-47.00	PASS
8074.915			-53.68	-47.00	PASS
10674.78			-53.58	-47.00	PASS
12330.66			-53.65	-47.00	PASS

**Remark:** All the modulation modes were tested, the data of the worst mode are described in the table.

## 9.7 RECEIVER BLOCKING

### 9.7.1 Applicable standard

ETSI EN 300 328 clause 4.3.2.11

### 9.7.2 Conformance Limit

For equipment that supports a PER or FER test to be performed, the minimum performance criterion shall be a PER or FER less than or equal to 10 %.

For equipment that does not support a PER or a FER test to be performed, the minimum performance criterion shall be no loss of the wireless transmission function needed for the intended use of the equipment

#### ■ General

While maintaining the minimum performance criteria as defined in clause 4.3.2.11.3, the blocking levels at specified frequency offsets shall be equal to or greater than the limits defined for the applicable receiver category provided in below.

#### ●Receiver Category 1

Receiver blocking parameters for Receiver Category 1 equipment

Wanted signal mean power from companion device (dBm)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 4)	Type of blocking signal
$(-133 \text{ dBm} + 10 \times \log_{10}(\text{OCBW}))$ or $-68 \text{ dBm}$ whichever is less (see note 2)	2 380 2 503,5	-34	CW
$(-139 \text{ dBm} + 10 \times \log_{10}(\text{OCBW}))$ or $-74 \text{ dBm}$ whichever is less (see note 3)	2 300 2 330 2 360 2 524 2 584 2 674	-34	CW

NOTE 1: OCBW is in Hz.

NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to  $P_{\min} + 26 \text{ dB}$  where  $P_{\min}$  is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.

NOTE 3: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to  $P_{\min} + 20 \text{ dB}$  where  $P_{\min}$  is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.

NOTE 4: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.



●Receiver Category 2

Receiver blocking parameters receiver category 2 equipment

Wanted signal mean power from companion device (dBm)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 3)	Type of blocking signal
$(-139 \text{ dBm} + 10 \times \log_{10}(\text{OCBW}) + 10 \text{ dB})$ or $(-74 \text{ dBm} + 10 \text{ dB})$ whichever is less (see note 2)	2 380 2 504 2 300 2 584	-34	CW

NOTE 1: OCBW is in Hz.

NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to  $P_{\min} + 26 \text{ dB}$  where  $P_{\min}$  is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.

NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.

●Receiver Category 3

Receiver blocking parameters receiver category 3 equipment


Wanted signal mean power from companion device (dBm)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 3)	Type of blocking signal
$(-139 \text{ dBm} + 10 \times \log_{10}(\text{OCBW}) + 20 \text{ dB})$ or $(-74 \text{ dBm} + 20 \text{ dB})$ whichever is less (see note 2)	2 380 2 504 2 300 2 584	-34	CW

NOTE 1: OCBW is in Hz.

NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to  $P_{\min} + 30 \text{ dB}$  where  $P_{\min}$  is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.

NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.

9.7.3 Test Configuration

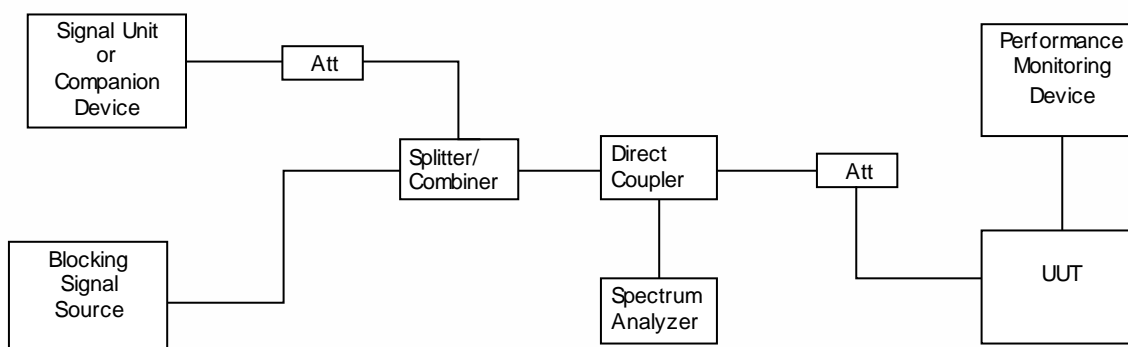

#### 9.7.4 Test Procedure

1. Please refer to ETSI EN 300 328 (V2.2.2) clause 5.4.11.1 for the test conditions.
2. Please refer to ETSI EN 300 328 (V2.2.2) clause 5.4.11.2 for the measurement method.

#### ■Conducted measurement

Adaptive Frequency Hopping equipment using DAA

Step 1:

- For non-FHSS equipment, the UUT shall be set to the lowest operating channel on which the blocking test has to be performed (see clause 5.4.11.1).

Step 2:

- The blocking signal generator is set to the first frequency as defined in the appropriate table corresponding to the receiver category and type of equipment.

Step 3:

- With the blocking signal generator switched off, a communication link is established between the UUT and the associated companion device using the test setup shown in figure 6.
- Unless the option provided in note 2 of the applicable table referred to in clause 5.4.11.2.1 is used, the level of the wanted signal shall be set to the value provided in the table corresponding to the receiver category and type of equipment. The test procedure defined in clause 5.4.2, and more in particular clause 5.4.2.2.1.2, can be used to measure the (conducted) level of the wanted signal however no correction shall be made for antenna gain of the companion device (step 6 in clause 5.4.2.2.1.2 shall be ignored). This level may be measured directly at the output of the companion device and a correction is made for the coupling loss into the UUT. The actual level for the wanted signal shall be recorded in the test report.
- When the option provided in note 2 of the applicable table referred to in clause 5.4.11.2.1 is used, the attenuation of the variable attenuator shall be increased in 1 dB steps to a value at which the minimum performance criteria as specified in clause 4.3.1.12.3 or clause 4.3.2.11.3 is still met. The resulting level for the wanted signal at the input of the UUT is  $P_{min}$ . This signal level ( $P_{min}$ ) is increased by the value provided in note 2 of the applicable table corresponding to the receiver category and type of equipment.

Step 4:

- The blocking signal at the UUT is set to the level provided in the table corresponding to the receiver category and type of equipment.
- If the performance criteria as specified in clause 4.3.1.12.3 or clause 4.3.2.11.3 are met then proceed to step 6.

Step 5:

- If the performance criteria as specified in clause 4.3.1.12.3 or clause 4.3.2.11.3 is not met, step 3 and step 4 shall be repeated after that the frequency of the blocking signal set in step 2 has been increased with a value equal to the Occupied Channel Bandwidth except:
  - For the blocking frequency 2 380 MHz, where this frequency offset shall be less than or equal to 10 MHz. If this frequency offset is more than 7 MHz, the level of the wanted signal shall be increased by 3 dB.
  - For the blocking frequency 2 503,5 MHz, where this frequency offset shall be less than or equal to 10 MHz. If this frequency offset is more than 7 MHz, the level of the wanted signal shall be decreased by 3 dB.
- If the performance criteria as specified in clause 4.3.1.12.3 or clause 4.3.2.11.3 is still not met, step 3 and step 4 shall be repeated after that the frequency of the blocking signal set in step 2 has been decreased with a value equal to the Occupied Channel Bandwidth except:
  - For the blocking frequency 2 380 MHz, where this frequency offset shall be less than or equal to 10 MHz. If this frequency offset is more than 7 MHz, the level of the wanted signal shall be decreased by 3 dB.
  - For the blocking frequency 2 503,5 MHz, where this frequency offset shall be less than or equal to 10 MHz. If this frequency offset is more than 7 MHz, the level of the wanted signal shall be increased by 3 dB.
- If the performance criteria as specified in clause 4.3.1.12.3 or clause 4.3.2.11.3 is still not met, the UUT fails to comply with the Receiver Blocking requirement and step 6 and step 7 are no longer required.
- It shall be recorded in the test report whether the shift of blocking frequencies as described in the present step was used.

Step 6:

- Repeat step 4 and step 5 for each remaining combination of frequency and level for the blocking signal as provided in the table corresponding to the receiver category and type of equipment.

Step 7:

- For non-FHSS equipment, repeat step 2 to step 6 with the UUT operating at the highest operating channel

on which the blocking test has to be performed (see clause 5.4.11.1).

Step 8:

- It shall be assessed and recorded in the test report whether the UUT complies with the Receiver Blocking requirement.

#### ■ Radiated measurements

When performing radiated measurements on equipment with dedicated antennas, measurements shall be repeated for each alternative dedicated antenna.

The power levels specified in table 6, table 7, table 8, table 14, table 15 and table 16 can be converted to a corresponding power flux density (PFD) value using the formula below

$$PFD = P + 11 - 20 \times \log_{10}(300 / F)$$

'P' is the power level in dBm

'F' is the frequency in MHz

A test site as described in annex B and applicable measurement procedures as described in annex C shall be used.

The test procedure is further as described under clause 5.4.11.2.1

The level of the blocking signal at the UUT referred to in step 4 is assumed to be the level in front of the UUT antenna(s). The UUT shall be positioned with its main beam pointing towards the antenna radiating the blocking signal. The position recorded in clause 5.4.2.2.2 can be used.


## 9.7.5 Test Results

### 9.7.5.1 Receiver category

<input type="checkbox"/>	Receiver category 1	Adaptive equipment with a maximum RF output power greater than 10 dBm e.i.r.p. shall be considered as receiver category 1 equipment.
<input checked="" type="checkbox"/>	Receiver category 2	Non-adaptive equipment with a Medium Utilization (MU) factor greater than 1 % and less than or equal to 10 % or adaptive equipment with a maximum RF output power of 10 dBm e.i.r.p. shall be considered as receiver category 2 equipment.
<input type="checkbox"/>	Receiver category 3	Non-adaptive equipment with a maximum Medium Utilization (MU) factor of 1 % or adaptive equipment with a maximum RF output power of 0 dBm e.i.r.p. shall be considered as receiver category 3 equipment.


Temperature:	25°C	Test Date:	2024/11/15
Humidity:	45% RH	Mode:	GFSK

TestMode	Antenna	Frequency [MHz]	Wanted signal [dBm]	Freq. [MHz]	CW [dBm]	PER [%]	Limit [%]	Verdict
BLE_1M	Ant1	2402	-68.8	2300	-34	0.30	≤10	PASS
BLE_1M	Ant1	2402	-68.8	2380	-34	0.40	≤10	PASS

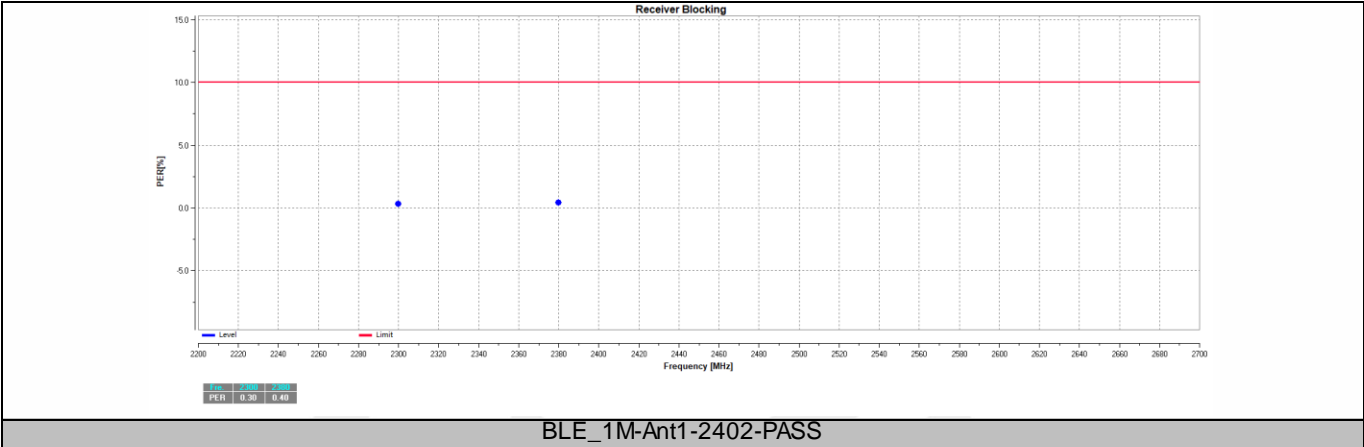


## 10. APPENDIX PHOTOGRAPHS OF TEST SETUP

Spurious Emission Test Setup (Below 1GHz)

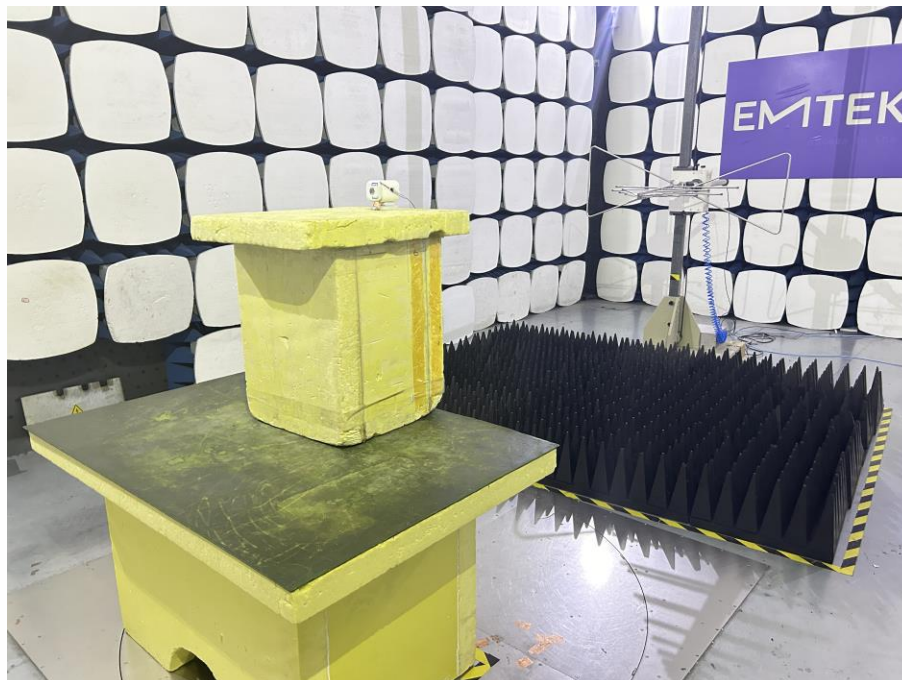

Spurious Emission Test Setup (Above 1GHz)

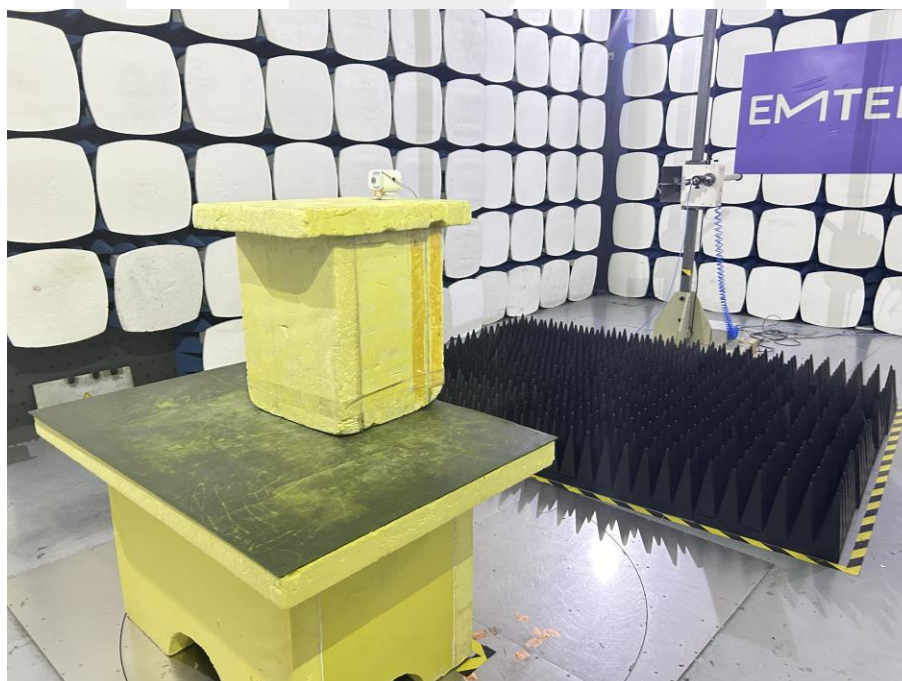

--- End of Report ---



## 声 明 Statement

- 1 . 本报告无授权批准人签字及“检验检测专用章”无效。  
1 . This report is invalid without the signature of the authorized approver and "special seal for testing".
- 2 . 未经许可本报告不得部分复制。  
2 . This report shall not be copied partly without authorization.
- 3 . 本报告的检测结果仅对送测样品有效，委托方对样品的代表性和资料的真实性负责。  
3 . The test results or observations are applicable only to tested sample. Client shall be responsible for representativeness of the sample and authenticity of the material.
- 4 . 本检测报告中检测项目标注有特殊符号则该项目不在资质认定范围内，仅作为客户委托、科研、教学或内部质量控制等目的使用。  
4 . The observations or tests with special mark fall outside the scope of accreditation, and are only used for purpose of commission, research, training, internal quality control etc.
- 5 . 本检测报告以实测值进行符合性判定，未考虑不确定度所带来的风险，本实验室不承担相关责任，特别约定、标准或规范中有明确规定的除外。  
5 . The test results or observations are provided in accordance with measured value, without taking risks caused by uncertainty into account. Without explicit stipulation in special agreements, standards or regulations, EMTEK shall not assume any responsibility.
- 6 . 对本检验报告若有异议，请于收到报告之日起 20 日内提出。  
6 . Objections shall be raised within 20 days from the date receiving the report.