



Existing Projects

Recent Opened Projects

demo1.ioc

Last modified date : 25/06/2026 16:45:22

Other Projects



- New Project ... Ctrl-N
- Load ...
 - Create a New Project
- Import Project ... Ctrl-I
- Save Project Ctrl-S
- Save Project As ... Ctrl-A
- Close Project
- Generate Report Ctrl-R
- Recent Projects ▶
- Exit Ctrl-X

New Project

I need to :

Start My project from MCU

ACCESS TO MCU SELECTOR

Start My project from ST Board

ACCESS TO BOARD SELECTOR

Start My project from Example

ACCESS TO EXAMPLE SELECTOR

Manage software installations

Check for STM32CubeMX and embedded software pac...

CHECK FOR UPDATES

Install or remove embedded software packages

INSTALL / REMOVE

MX new in v6.11

Use USBX in bare-metal projects

► Starting with STM32H5, STM32U5 and STM32U0 series



► Home > Pinout & Configuration > USBX

☆

STM32F103C8T6

+

-

PRODUCT INFO

>

RY

>

>

G

>

UNICATION INTERFACE

>

INTERFACE

>

NAL MEMORY INTERFACE

>

INTERFACE

>

ICS

>

ITY

>

PERIPHERAL

>

CAL

>

FeaturesBlock DiagramDocs & ResourcesCAD ResourcesDatasheetBuy

☆STM32F1 Series

STM32F103C8T6

Mainstream Performance line, Arm Cortex-M3 MCU with 64 Kbytes of memory, 72 MHz CPU, motor control, USB and CAN

ACTIVE

Product is in mass production

Unit Price for 10kU (US\$) : 2.7946

LQFP 48 7x7x1.4 mm

The STM32F103xx medium-density performance line family incorporates the high-performance Arm® Cortex®-M3 32-bit operating at a 72 MHz frequency, high-speed embedded memories (Flash memory up to 128 Kbytes and SRAM up to 64 Kbytes) and an extensive range of enhanced I/Os and peripherals connected to two APB buses. All devices offer two 12-bit ADCs, 16 general purpose 16-bit timers plus one PWM timer, as well as standard and advanced communication interfaces: up to 2 USARTs and SPIs, three USARTs, an USB and a CAN.

The devices operate from a 2.0 to 3.6 V power supply. They are available in both the -40 to +85°C temperature range and -40 to +105 °C extended temperature range. A comprehensive set of power-saving mode allows the design of low-power applications.

MCUs/MPUs List: 2 items

*	Commercial Part No	...	Reference	Marketing ...	Unit Price for 10...	Boa...	Package	Flash	R
☆	STM32F103C8T6		STM32F103C...	Active	2.7946		LQFP 48 7x7x1.4 mm	64 kBytes 20	
☆	STM32F103C8T6TR		STM32F103C...	Active	2.7946		LQFP 48 7x7x1.4 mm	64 kBytes 20	

▼ Software Packs

▼ Pinout



Categories

A->Z

System Core >

Analog >

Timers >

Connectivity >

Computing >

Middleware and Software Pa... >

RCC Mode and Configuration

Mode

High Speed Clock (HSE) Crystal/Ceramic Resonator

Low Speed Clock (LSE) Disable

☐ Master Clock Output

Configuration

Reset Configuration

✔ User Constants

✔ NVIC Settings

✔ GPIO Settings

✔ Parameter Settings

Configure the below parameters :

Search (Ctrl+F)



▼ System Parameters

VDD voltage (V)

3.3 V

Prefetch Buffer

Enabled


Pinout view


System view

RCC_OSC_IN

RCC_OSC_OUT



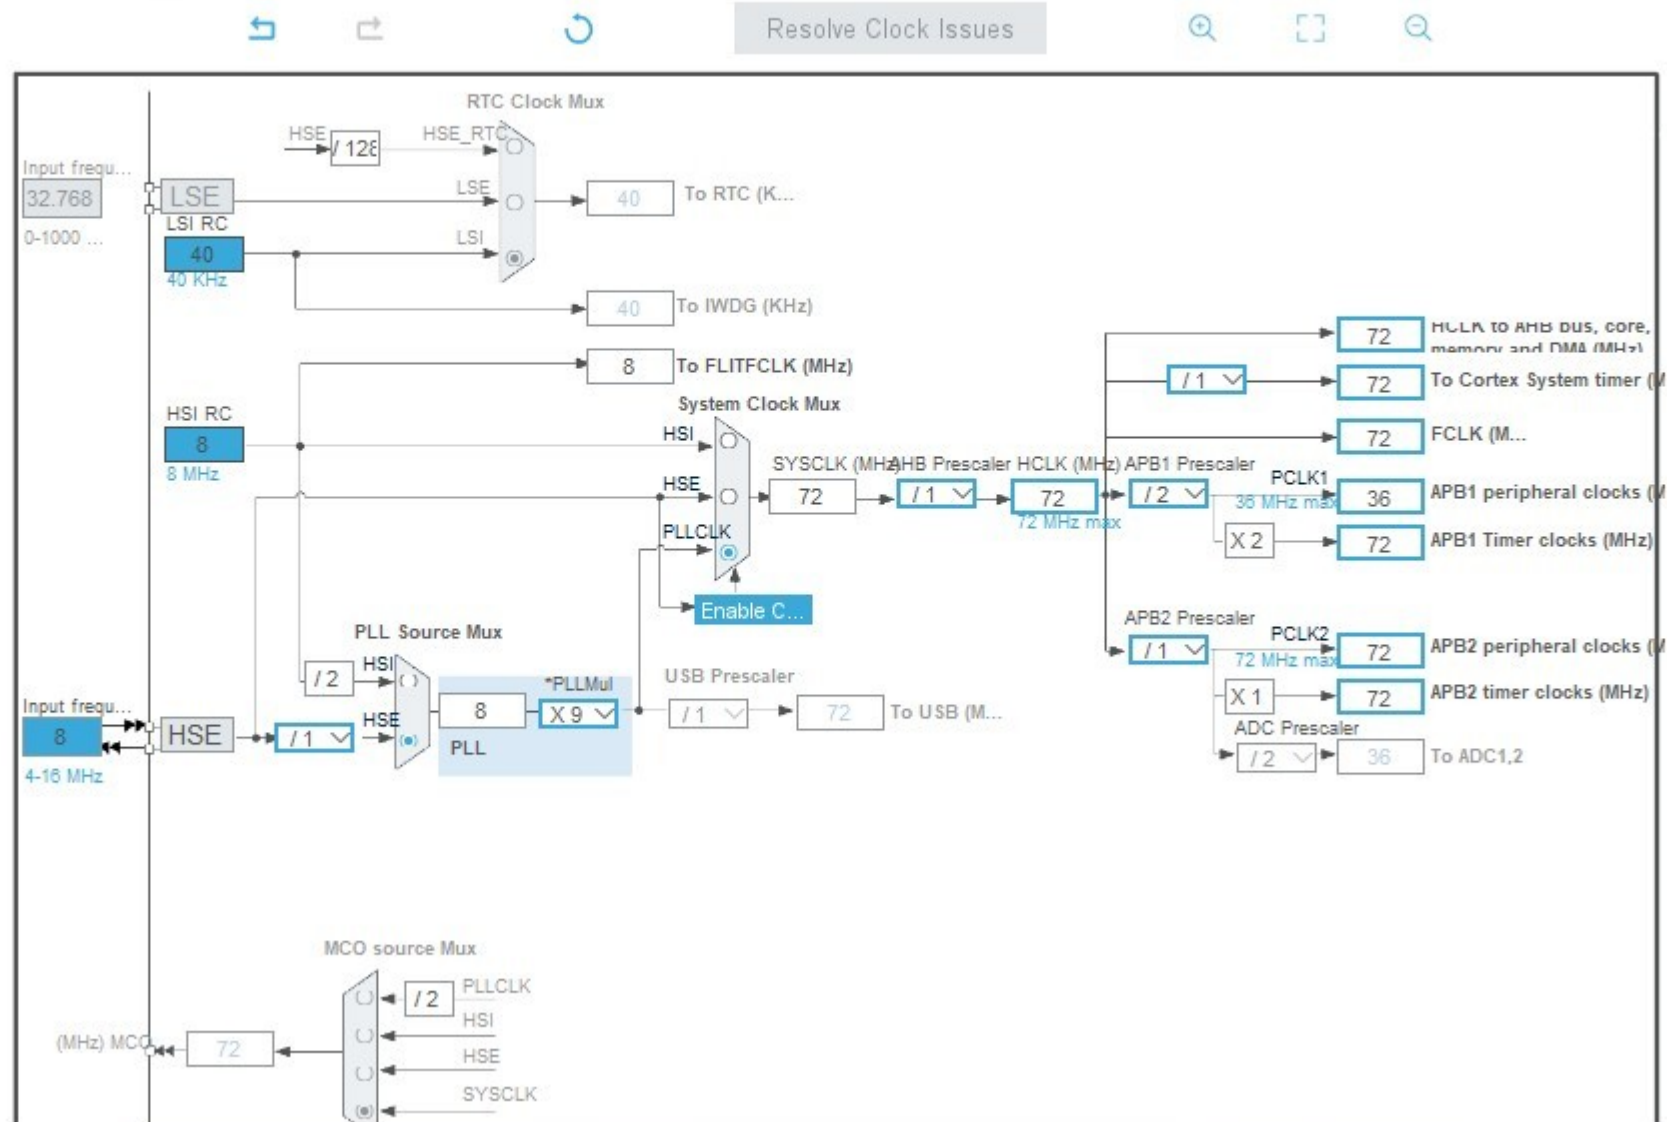

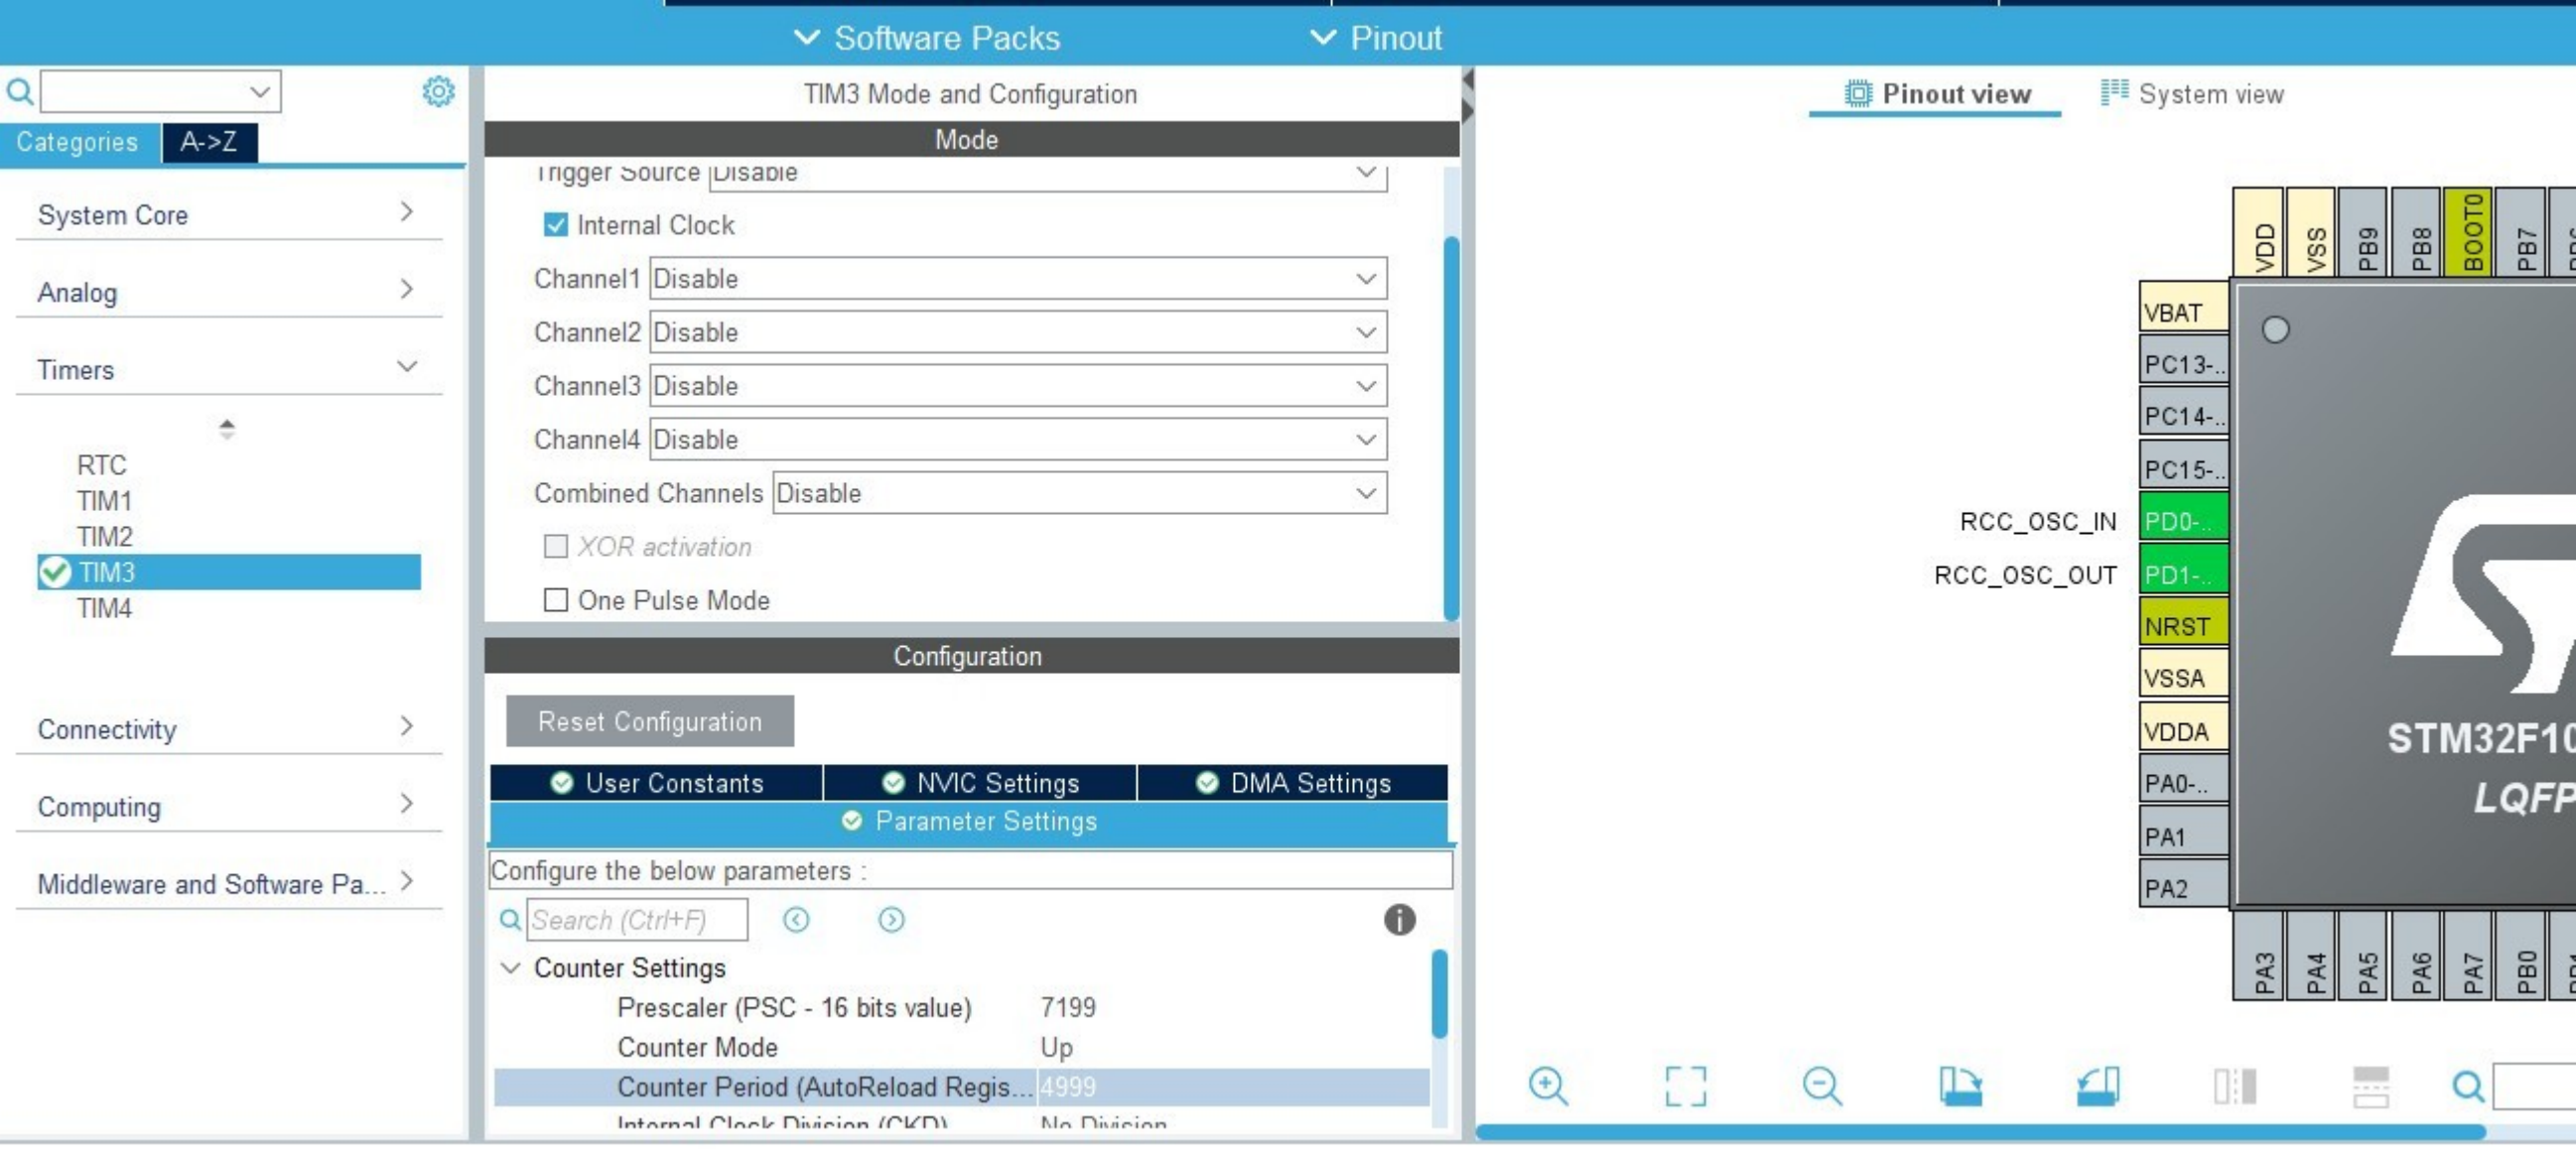

Software Packs

Pinout

I2C2 Mode and Configuration

Mode

I2C

I2C

Configuration

Reset Configuration

✓ NVIC Settings

✓ DMA Settings

✓ GPIO Settings

✓ Parameter Settings

✓ User Constants

Configure the below parameters :

Search (Ctrl+F)

Master Features

I2C Speed Mode

Standard Mode

I2C Clock Speed (Hz)

100000

Slave Features

Clock No Stretch Mode

Disabled

Primary Address Length sel...

7-bit

Dual Address Acknowledged

Disabled

Primary slave address


0

General Call address detecti...

Disabled

Pinout view

System view

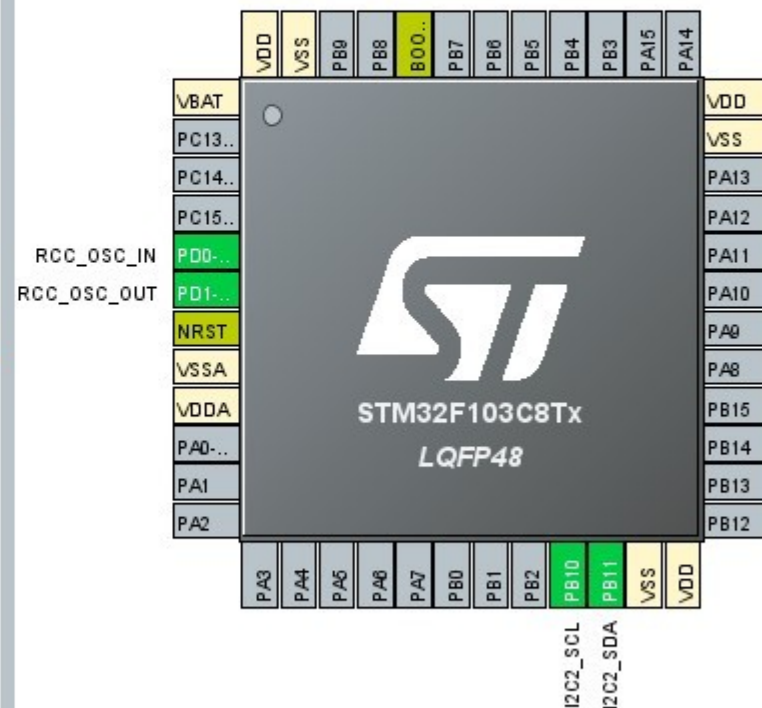

Software Packs

Pinout

GPIO Mode and Configuration

Configuration

Group By Peripherals

GPIO I2C RCC

Search Signals

Search (Ctrl+F)

☐ Show only Modified Pins

Pin ...	Signal o...	GPIO o...	GPIO m...	GPIO P...	Maximu...	User La...	Modified
PA5	n/a	Low	Output ...	No pull-...	Low		☐

GPIO mode

Output Push Pull

GPIO Pull-up/Pull-down


No pull-up and no pull-down

Maximum output speed

Low

Pinout view

System view

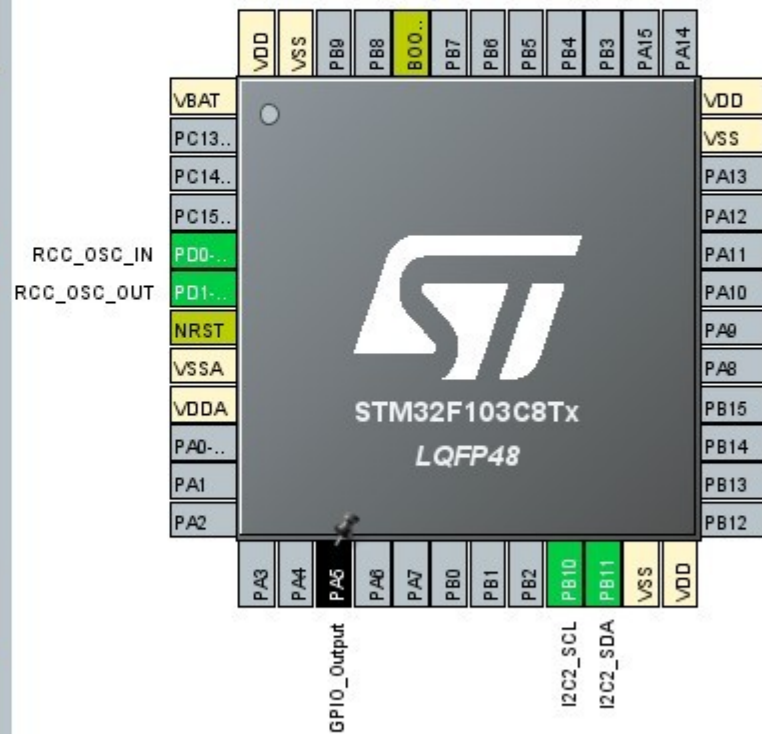

>

>

>

>

>

>

▼

✓ RCC

☐ Show only Modified Pins

Pin ...	Signal o...	GPIO o...	GPIO m...	GPIO P...	Maximu...	User La...	Modified
PA1	n/a	n/a	Input m...	No pull-...	n/a	BTN1	✓
PA2	n/a	n/a	Input m...	No pull-...	n/a	BTN2	✓
PA3	n/a	n/a	Input m...	No pull-...	n/a	BTN3	✓
PA5	n/a	Low	Output ...	No pull-...	Low	FAN_C...	✓

▼

