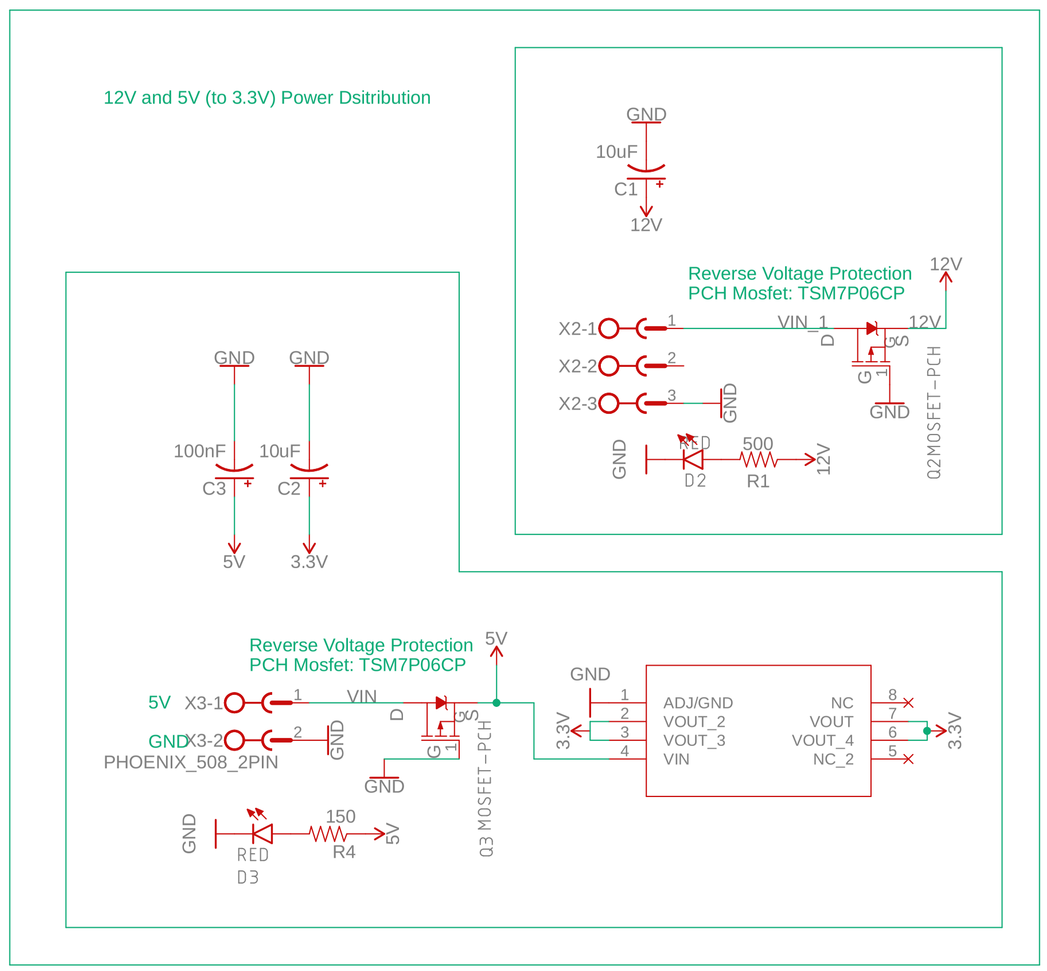
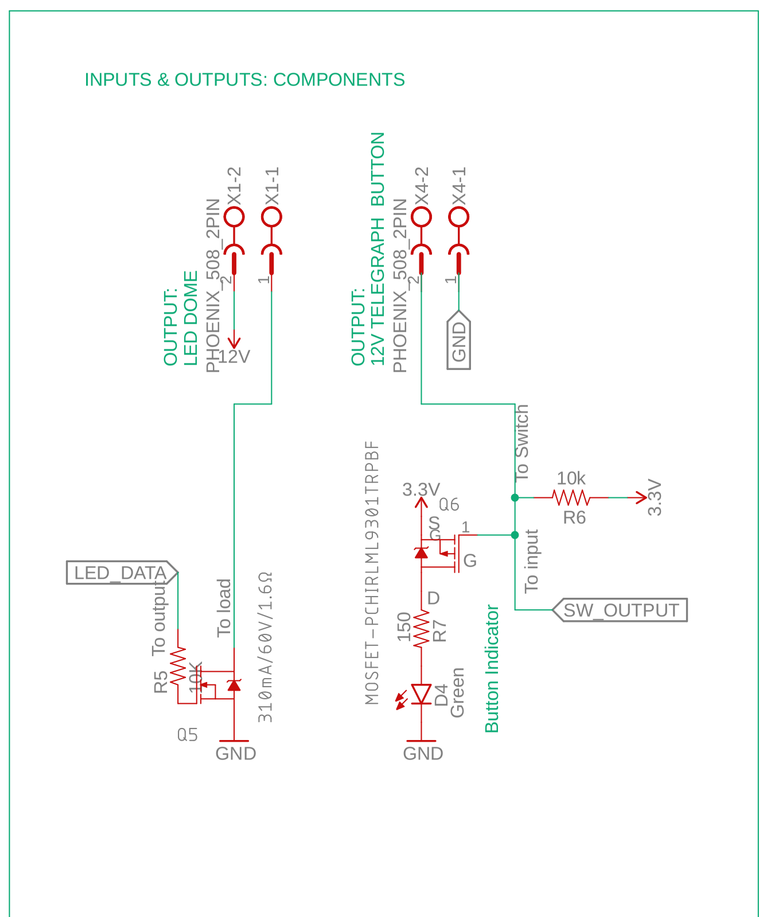
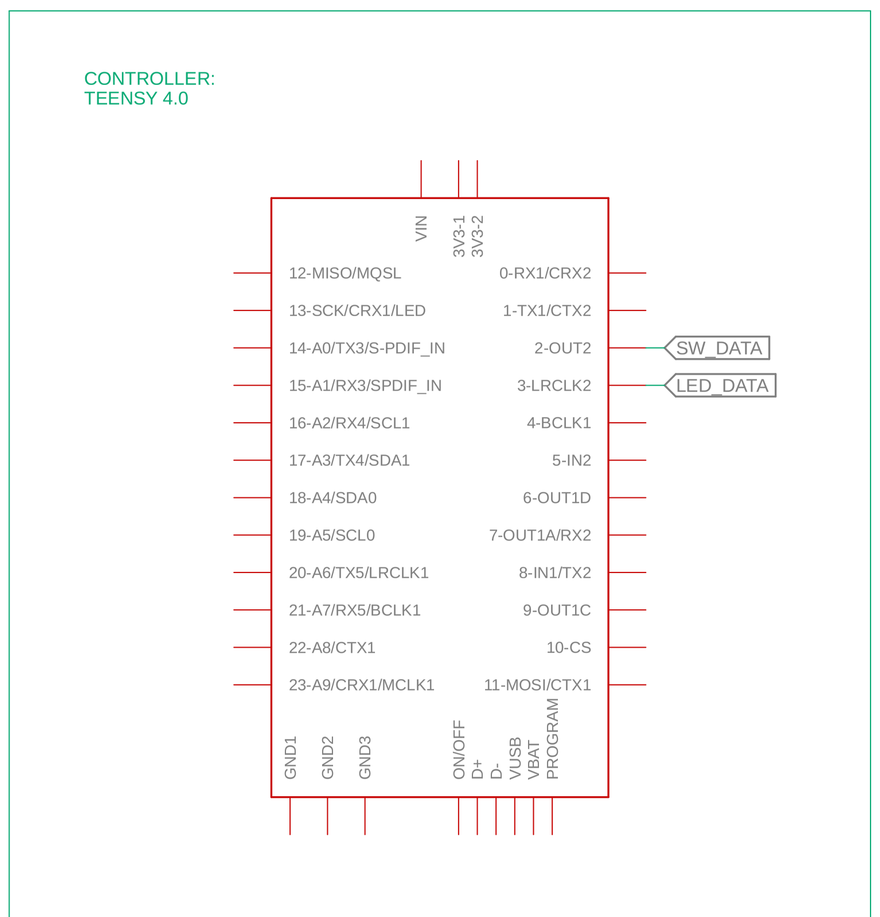
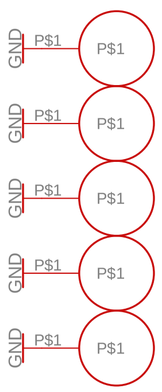
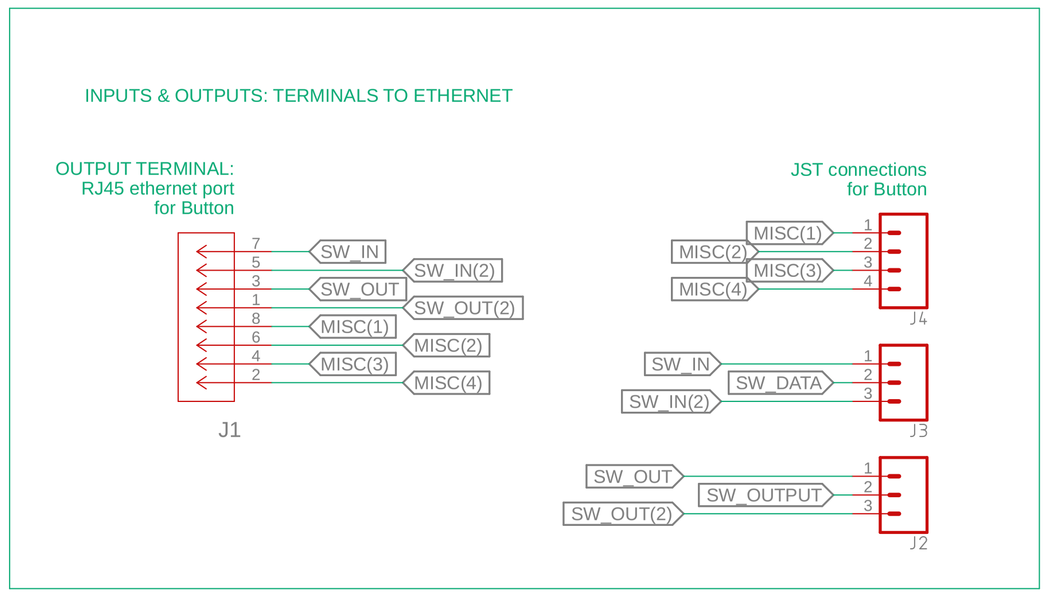

12V and 5V (to 3.3V) Power Dsitribution
GND
10uF
C1
12V
Reverse Voltage Protection
PCH Mosfet: TSM7P06CP
12V
X2-1
X2-2
X2-3
1
2
3
VIN_1
D
G
S
12V
GND
GND
Q2MOSFET-PCH
GND
LED
500
12V
D2
R1
GND
GND
100nF
10uF
C3
C2
5V
3.3V
Reverse Voltage Protection
PCH Mosfet: TSM7P06CP
5V
5V
X3-1
GND
X3-2
PHOENIX_508_2PIN
VIN
D
G
S
GND
GND
Q3 MOSFET-PCH
5V
GND
3.3V
ADJ/GND
VOUT_2
VOUT_3
VIN
NC
VOUT
VOUT_4
NC_2
3.3V
GND
RED
D3
150
R4
5V


INPUTS & OUTPUTS: COMPONENTS
OUTPUT:
LED DOME
PHOENIX_508_2PIN
X1-2
X1-1
12V
OUTPUT:
12V TELEGRAPH BUTTON
PHOENIX_508_2PIN
X4-2
X4-1
GND
To Switch
10k
R6
3.3V
3.3V
Q6
D
G
To input
SW_OUTPUT
LED_DATA
To output
R5
10k
To load
310mA/60V/1.6Ω
Q5
GND
MOSFET-PCHIRLML9301TRPBF
150
R7
D4
Green
Button Indicator
GND


CONTROLLER:
TEENSY 4.0
VIN
3V3-1
3V3-2
12-MISO/MQSL
13-SCK/CRX1/LED
14-A0/TX3/S-PDIF_IN
15-A1/RX3/SPDIF_IN
16-A2/RX4/SCL1
17-A3/TX4/SDA1
18-A4/SDA0
19-A5/SCL0
20-A6/TX5/LRCLK1
21-A7/RX5/BCLK1
22-A8/CTX1
23-A9/CRX1/MCLK1
0-RX1/CRX2
1-TX1/CTX2
2-OUT2
3-LRCLK2
4-BCLK1
5-IN2
6-OUT1D
7-OUT1A/RX2
8-IN1/TX2
9-OUT1C
10-CS
11-MOSI/CTX1
SW_DATA
LED_DATA
GND1
GND2
GND3
ON/OFF
D+
D-
VUSB
VBAT
PROGRAM


GND
P$1
P$1
GND
P$1
P$1
GND
P$1
P$1
GND
P$1
P$1
GND
P$1
P$1


INPUTS & OUTPUTS: TERMINALS TO ETHERNET
OUTPUT TERMINAL:
RJ45 ethernet port
for Button
7
5
3
1
8
6
4
2
SW_IN
SW_OUT
MISC(1)
MISC(3)
SW_IN(2)
SW_OUT(2)
MISC(2)
MISC(4)
J1
JST connections
for Button
MISC(1)
MISC(2)
MISC(3)
MISC(4)
1
2
3
4
J4
SW_IN
SW_IN(2)
SW_DATA
1
2
3
J3
SW_OUT
SW_OUT(2)
SW_OUTPUT
1
2
3
J2