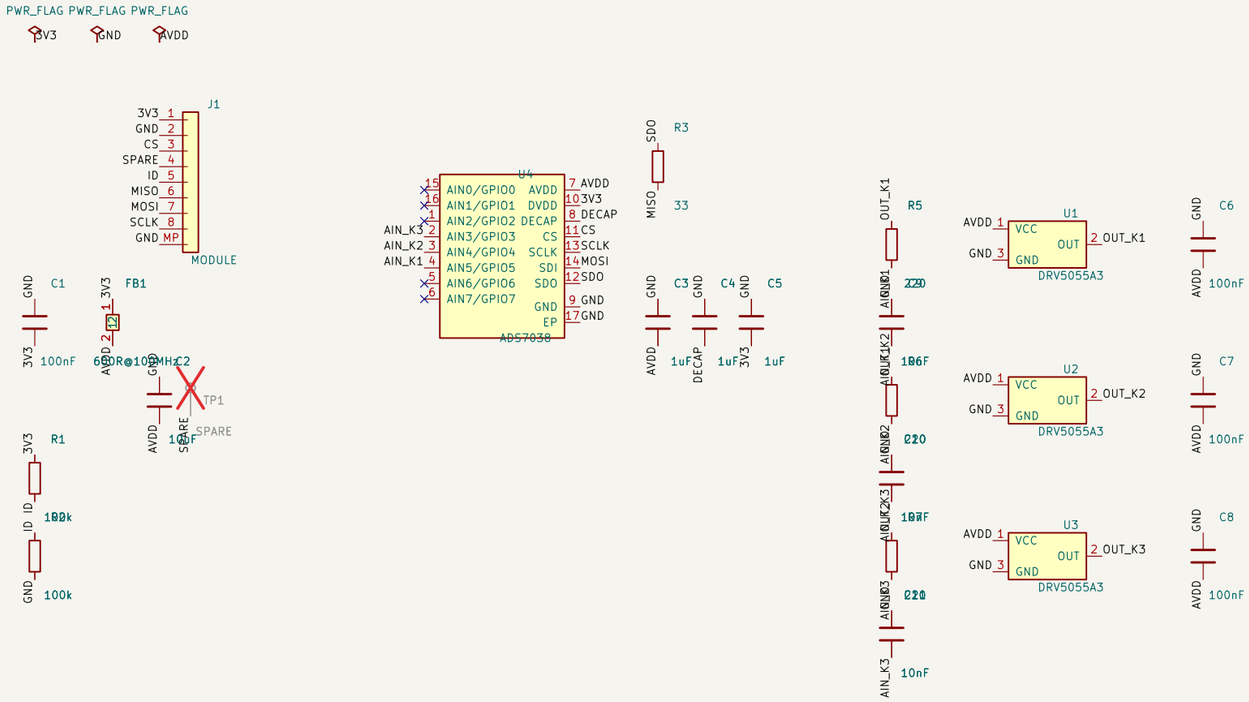


Module connector (V1 pinout): 1 3V3 | 2 GND | 3 CS = GPIO10 | 4 spare = GPIO7 | 5 ID = GPIO8 | 6 MISO = GPIO6 | 7 MOSI = GPIO4 | 8 SCLK = GPIO2

ID = 3V3 x 100k/(100k+100k) = 1.65 V: the 'Hall SPI' module ID reserved in V1/README.md.

Ratiometric: the ADS7038 reference is AVDD, the same filtered rail that powers the three sensors.

Key channels: key 1 = AIN5, key 2 = AIN4, key 3 = AIN3.

Every part is on the bottom side; the switches sit on top under the plate.

OPad

Sheet: /
File: he_input_v2.kicad_sch

Title: OPad Hall Effect Input Module V2

Size: A3	Date: 2026-10-23	**Rev: V2.0**
KiCad E.D.A. 10.0.6		Id: 1/1