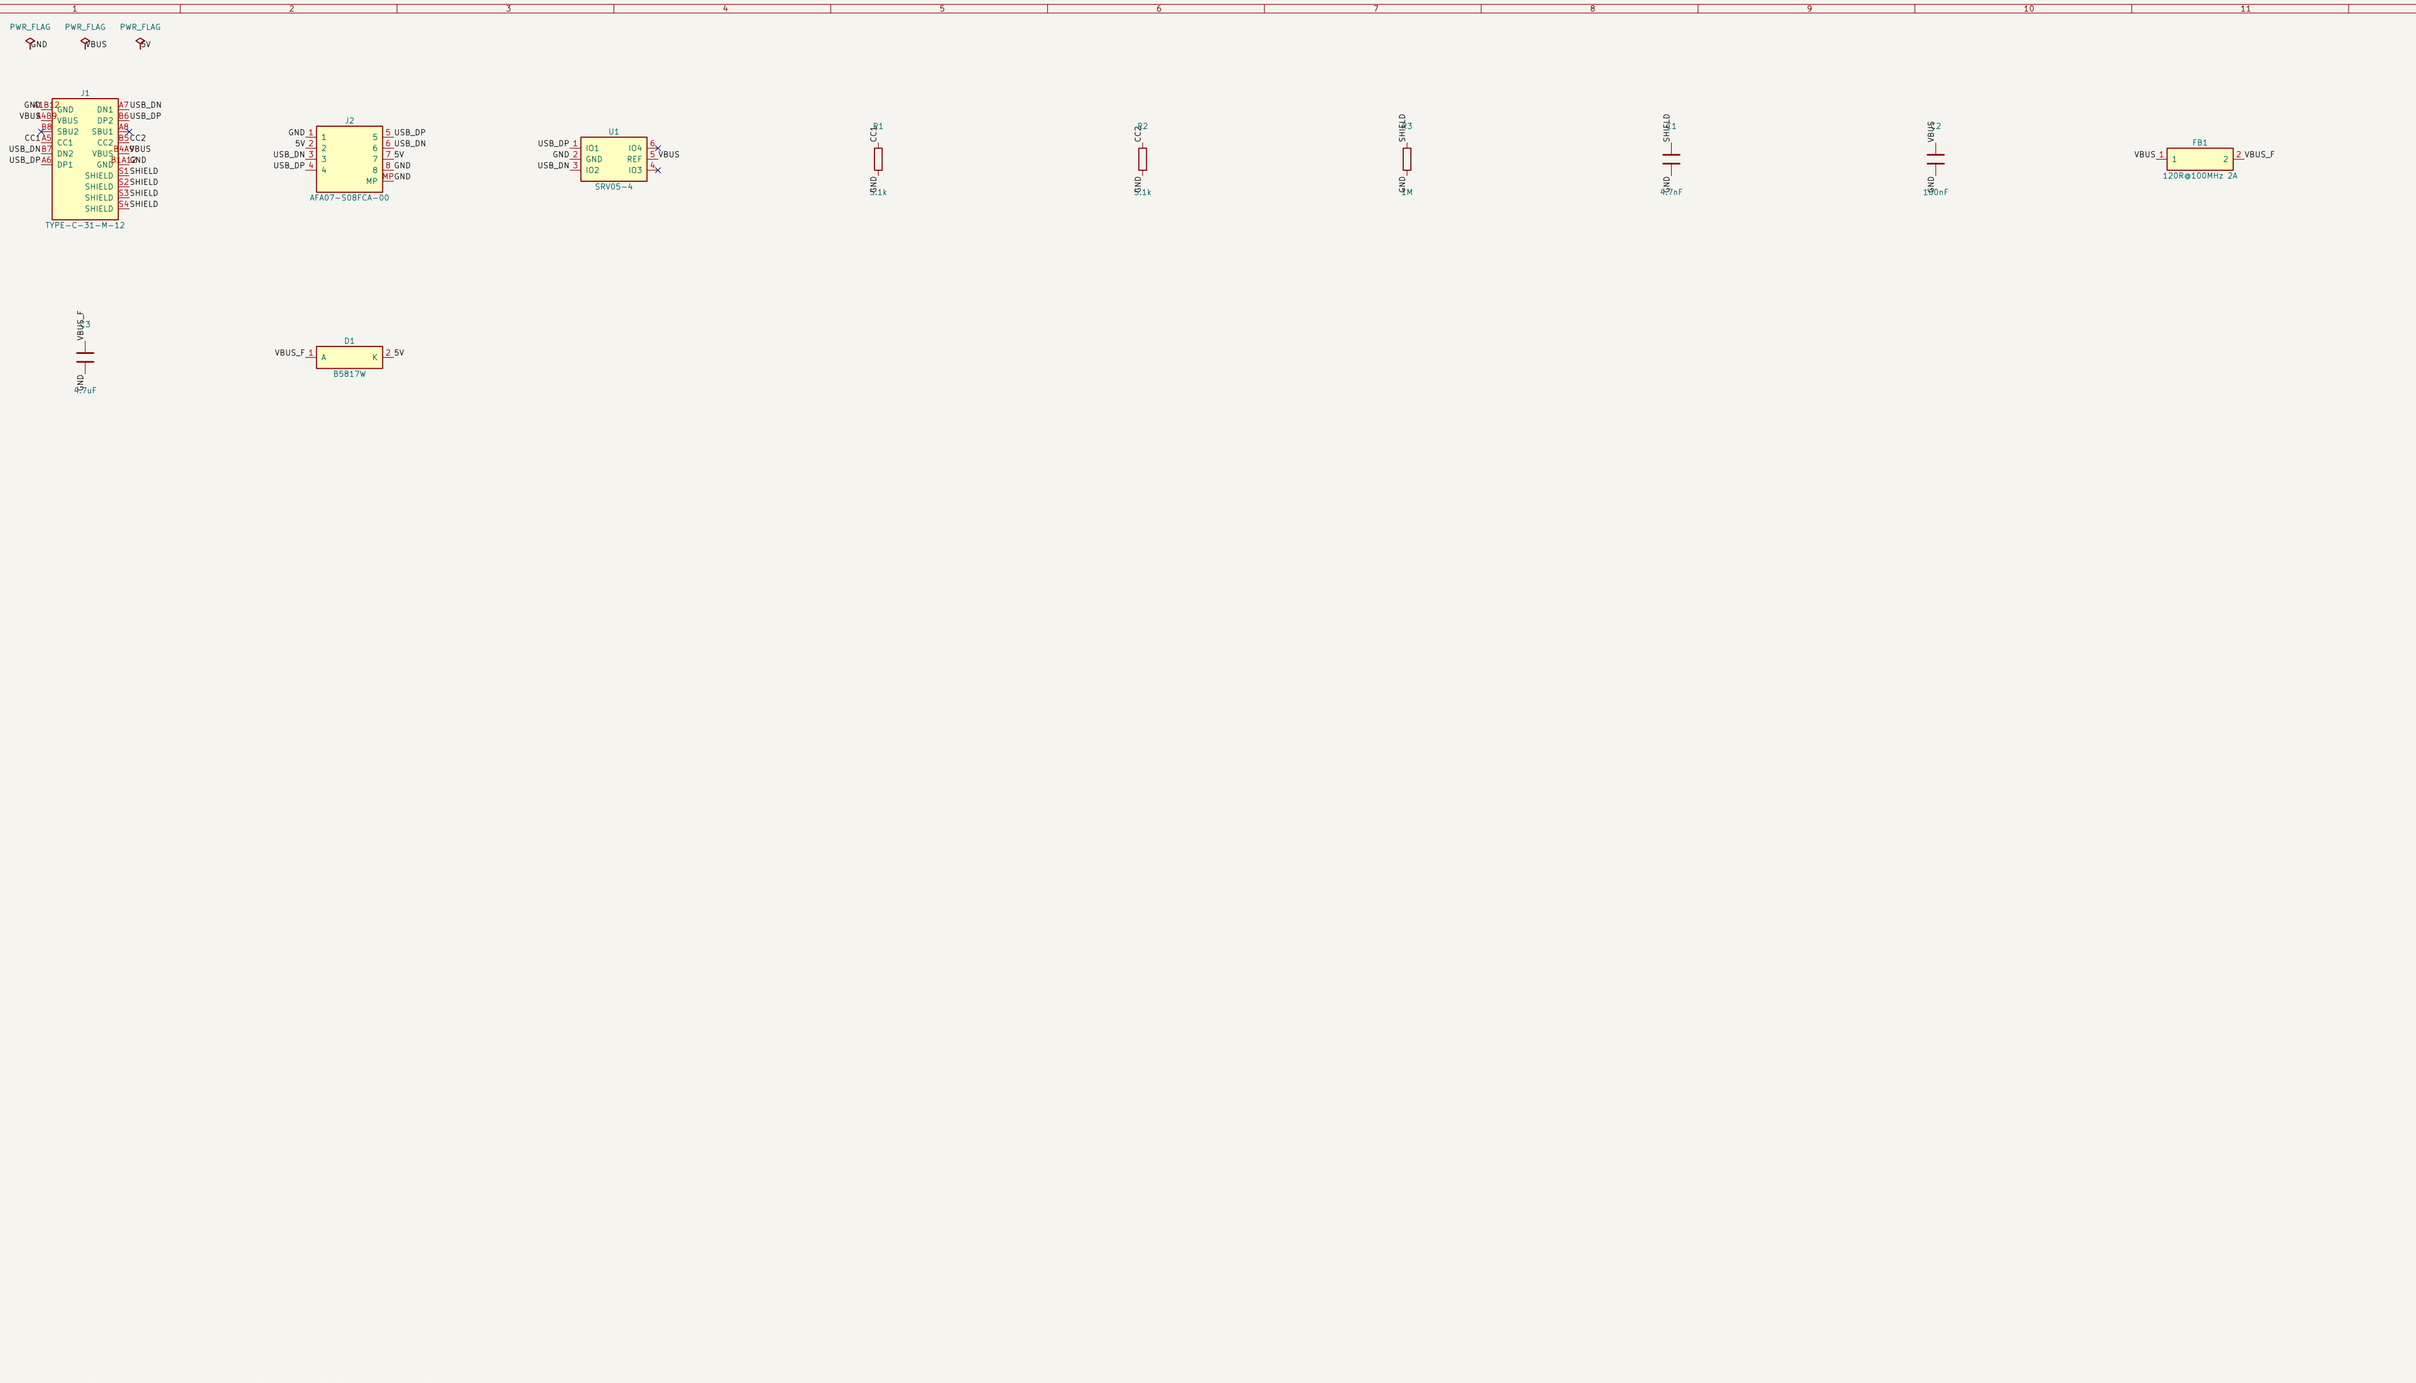


OPad USB board V3: USB-C -> CC 5.1k, ESD, VBUS 100nF / ferrite / 4.7uF, Schottky -> USB FFC to the carrier.

USB FFC: 1 GND | 2 5V | 3 D- | 4 D+ | 5 D+ | 6 D- | 7 5V | 8 GND (the same read from either end).

Shield to GND through 1M || 4.7nF.

OPad		
Sheet: /		
File: usb_v3.kicad_sch		
Title: OPad USB Board V3		
Size: A2	Date: 2026-10-28	**Rev: V3.0**
KiCad E.D.A. 10.0.7		Id: 1/1