

平成 27 年度修士論文

Radio Environment Database considering
Primary User Activity in Time Domain

プライマリユーザの時間的变化を考慮した
電波環境データベース構築

学生番号	1431019
氏名	王 昊
情報・通信工学専攻	情報通信システムコース
主指導教員	藤井 威生 教授
指導教員	山尾 泰 教授
提出日	平成 28 年 1 月 29 日

平成27年度修士論文

Radio Environment Database
considering Primary User Activity in
Time Domain

プライマリユーザの時間的变化を考慮した
電波環境データベース構築

学生番号	1431019
氏名	王 昊
情報・通信工学専攻	情報通信システムコース
主指導教員	藤井 威生 教授
指導教員	山尾 泰 教授
提出日	平成28年1月29日

専攻主任印	主指導教員印	指導教員印

修士論文の和文要旨

研究科・専攻	大学院 情報理工学研究科 情報・通信工学専攻 博士前期課程		
氏 名	王 昊	学籍番号	1431019
論文題目	Radio Environment Database considering Primary User Activity in Time Domain		

要 旨

コグニティブ無線を用いた周波数共用において、周波数の二次利用者 (SU: Secondary User) は既存の周波数割り当てユーザ (PU: Primary User) への干渉を回避する必要がある。その中で自身の通信品質を確保するためには、正確な電波環境推定技術が重要である。筆者らは、これまで車載無線機やスマートフォンといった移動端末が観測した膨大な電波環境情報から構築される電波環境データベースを提案してきた。テレビ帯域を対象とした実証実験により、従来の距離減衰モデルに基づく手法と比較して PU の平均受信電力値の空間的な分布を精度良く推定できることを明らかにしている。しかし、これまでは PU の通信状態の ON/OFF 遷移を考慮せずに観測値を一意に平均化していた。そのため、無線 LAN のように観測期間内に状態遷移する可能性のあるシステムについては、最終的な平均結果と ON 状態の平均受信電力値に差が生じる恐れがあった。そこで本稿では、PU の通信状態の遷移を検出するセンシング手法を提案する。提案手法では、電波環境データベースに蓄積された統計情報と連携し、協調センシングによって電波環境を観測することで状態遷移を検出する。本手法により、通信を行なっている状態での受信電力値の取り出しが可能となり、結果として PU が通信を行なっている状態での平均受信信号電力値を精度良く推定できる。本稿では特に、状態遷移時間の検出に焦点を当てたシミュレーション評価を行ない、その有効性を示す。

和文概要

コグニティブ無線を用いた周波数共用において、周波数の二次利用者 (SU: Secondary User) は既存の周波数割り当てユーザ (PU: Primary User) への干渉を回避する必要がある。その中で自身の通信品質を確保するためには、正確な電波環境推定技術が重要である。筆者らは、これまで車載無線機やスマートフォンといった移動端末が観測した膨大な電波環境情報から構築される電波環境データベースを提案してきた。テレビ帯域を対象とした実証実験により、従来の距離減衰モデルに基づく手法と比較して PU の平均受信電力値の空間的な分布を精度良く推定できることを明らかにしている。しかし、これまでは PU の通信状態の ON/OFF 遷移を考慮せずに観測値を一意に平均化していた。そのため、無線 LAN のように観測期間内に状態遷移する可能性のあるシステムについては、最終的な平均結果と ON 状態の平均受信電力値に差が生じる恐れがあった。そこで本稿では、PU の通信状態の遷移を検出するセンシング手法を提案する。提案手法では、電波環境データベースに蓄積された統計情報と連携し、協調センシングによって電波環境を観測することで状態遷移を検出する。本手法により、通信を行なっている状態での受信電力値の取り出しが可能となり、結果として PU が通信を行なっている状態での平均受信信号電力値を精度良く推定できる。本稿では特に、状態遷移時間の検出に焦点を当てたシミュレーション評価を行ない、その有効性を示す。

Abstract

Recently, with the fast development of wireless communication technology, cognitive radio (CR) has been recognized as a promising solution to address the problem of impending spectrum scarcity for improving the utilization of spectrum for various wireless applications [1], [2]. In a CR system, it allows the Secondary Users (SUs) to opportunistically utilize the temporal and/or spatial unused spectrum holes without harmful interference to Primary Users (PUs). While SUs can occupy available spectrum holes as long as the corresponding PU is inactive, they must immediately evacuate the band as soon as the corresponding PU appears. One of the main challenges is to intelligently determine ongoing PU activity to avoid interference toward PU. SUs can evacuate the band without affecting PU's activity and opportunistically access the spectrum to maximize the spectrum usage if the information about PU can be obtained in advance. Hence, more information about PU leads to more effective spectrum usage for SUs, and an external device for providing information of PU is necessary. One of the main challenges is to intelligently determine ongoing PU activity to avoid interference toward PU. SUs can evacuate the band without affecting PU's activity and opportunistically access the spectrum to maximize the spectrum usage if the information about PU can be obtained in advance. Hence, more information about PU leads to more effective spectrum usage for SUs, and an external device for providing information of PU is necessary.

Contents

1	Introduction	1
1.1	Background	1
1.2	Spectrum Sharing Trend and Problem	3
1.3	Purpose	5
2	Cognitive Radio	7
2.1	Overview of Cognitive Radio	7
2.2	Multi-mode System	8
2.3	Dynamic Spectrum Access for Spectrum Sharing	9
2.3.1	Overlay Spectrum Sharing	9
2.3.2	Underlay Spectrum Sharing	10
2.4	Overview of Spectrum Sharing with Spectrum Database	10
3	Spectrum Database	11
3.1	Spectrum Sharing with Spectrum Database	11
3.2	Measurement-based Spectrum Database	11
3.2.1	Spectrum Database Construction based on Energy Detection	11
3.3	Problem of Spectrum Database Construction	11
4	Active Period Detection Method of Primary Signal for Spectrum Database	12
4.1	System Model	12
4.2	Transition Point Detection Method under Multiple ON/OFF Environment	12
4.2.1	CUSUM	12
4.2.2	GLR	12
5	Simulation	13
5.1	System Model	13
5.2	Simulation Results	13

6 Conclusion	14
Acknowledgement	15
References	16
Publications	18
Appendix	19

Chapter 1

Introduction

In chapter 1, present spectrum scarcity problem as the background of this thesis and technology proposed for solution is described. Also, the overview of this thesis and purpose is described.

1.1 Background

Due to the rapid development of wireless communication systems, a demand on spectrum resource for communication has increased explosively. Because the data rate and performance of the wireless communication system, such as mobile phone, are improved, it leads to a serious spectrum scarcity problem.

From Fig. 1.1, reference [1] predicts that Global mobile data traffic will increase nearly tenfold between 2014 and 2019 and mobile data traffic will grow at a compound annual growth rate (CAGR) of 57 percent from 2014 to 2019, reaching 24.3 exabytes per month by 2019. In addition to the increasement of the data traffic, a fixed resource allocation method as the current spectrum allocation policy, which is utilized for avoiding harmful interference toward licensed systems with each other, is also considered as a major reason for the scarcity of the spectrum resource. As a reason, almost linear increasing demand on necessary bandwidth for communication leads to a difficult allocation for new systems. From Fig. 1.2 reported from Ministry of Internal Affairs and Communications(MIC) in Japan government, it is shown that most of the spectrum resources has already been allocated. Thus, the lack of spectrum resources has become a serious problem.

Since the finite spectrum resources are not able to fulfill the exponential growth of demand on traffic, it is necessary to review the present spectrum policy with fixed resource allocation for the next generation wireless communication systems and a efficient spectrum utilization turns to be a key problem.

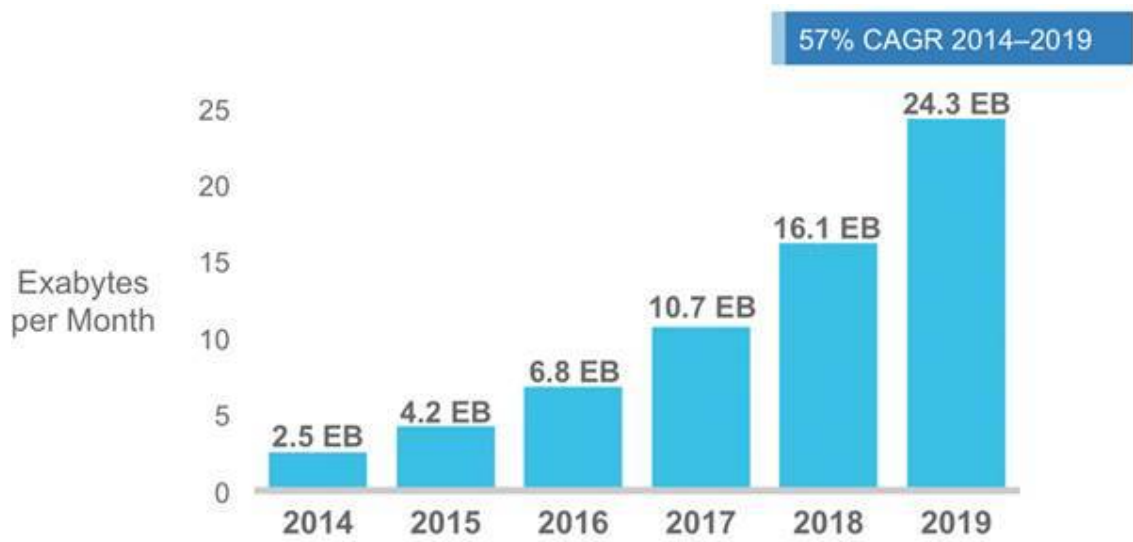


Figure 1.1: Cisco Forecasts 24.3 Exabytes per Month of Mobile Data Traffic by 2019

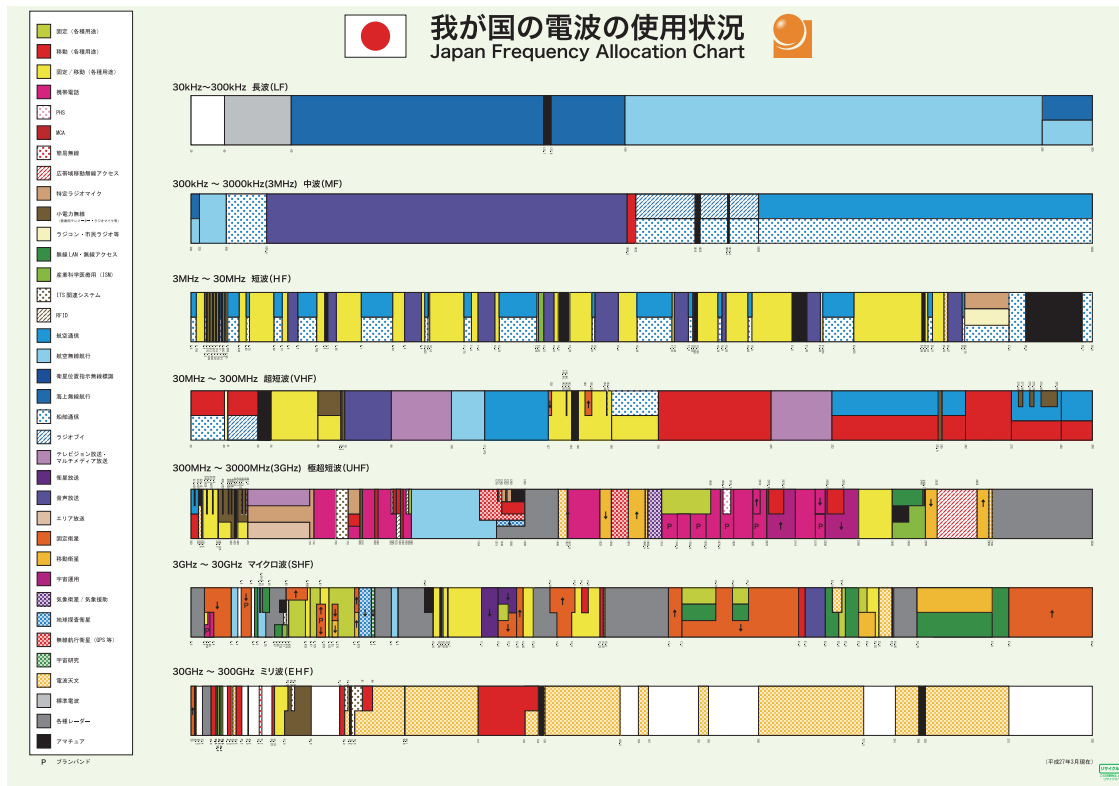


Figure 1.2: Japanese Frequency Allocation Chart.

There are 2 main methods to ensure the bandwidth for new systems. Firstly, a spectrum arrangement on the whole wireless communication systems is utilized to extend available bandwidth. In 2011, an arrangement on television broadcasting is executed with switching to digital television broadcasting. However, it is not available for supporting the exponential growth of the data traffic and the number of systems. Second, an efficient and dynamic utilization method of bandwidth is considered to extend the probability for the future wireless communication systems, which is attracted attention as effective solution to the shortage of spectrum resources.

According to the report [2] from Federal Communications Commission(FCC), actual spectrum usage on the licensed band is lack of balance in both temporal and spatial domain and instantaneous usage efficiency remains at 15% ~ 80% even under crowd environment, such as urban areas, which means that an unused White Space(WS) exists even under temporal and spatial varying environment. However, it is not allowed to utilize White Space by other licensed or unlicensed systems based on current radio regulations.

1.2 Spectrum Sharing Trend and Problem

Cognitive Radio(CR)[4] has been recognized as a promising solution to address the problem for improving the utilization of spectrum for various wireless applications. In a CR system from Fig.1.3 and 1.4, it allows the Secondary Users (SUs) to opportunistically utilize the temporal and/or spatial unused spectrum holes without causing interference to Primary Users (PUs). While SUs can occupy available spectrum holes as long as the corresponding PU is inactive, they must immediately evacuate the band as soon as the corresponding PU appears.

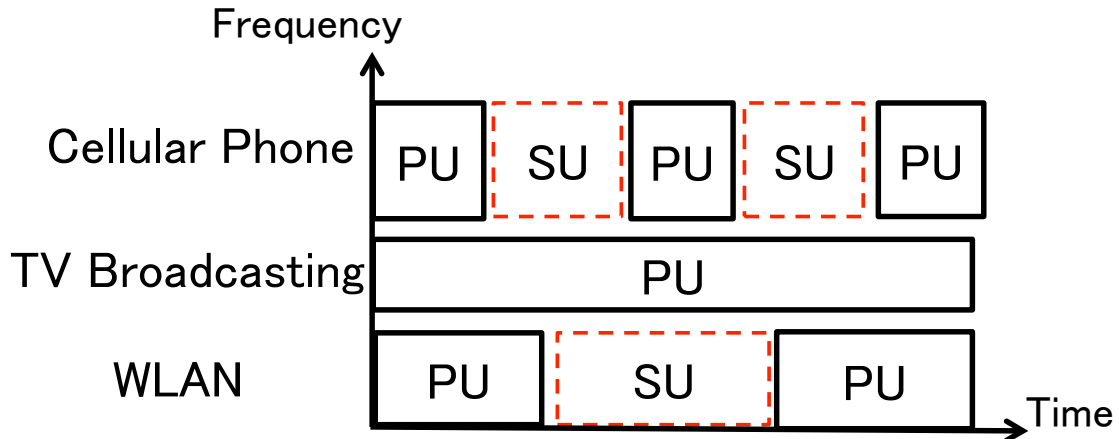


Figure 1.3: Coexistence between PU and SU in time domain.

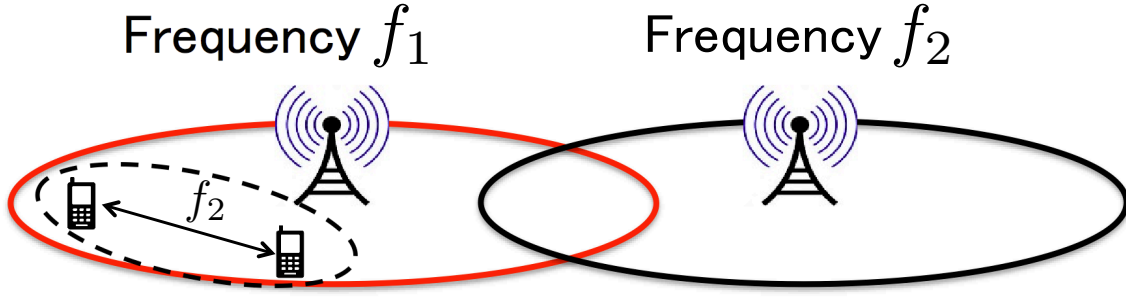


Figure 1.4: Coexistence between PU and SU in space domain.

One of the main challenges is to intelligently determine ongoing PU activity to avoid interference toward PU. SUs can evacuate the band without affecting PU's activity and opportunistically access the spectrum to maximize the spectrum usage if the information about PU can be obtained in advance. Hence, more information about PU leads to more effective spectrum usage for SUs, and an external device for providing information of PU is necessary. One of the main challenges is to intelligently determine ongoing PU activity to avoid interference toward PU. SUs can evacuate the band without affecting activity of PU and opportunistically access the spectrum to maximize the spectrum usage if the information about PU can be obtained in advance. Hence, more information about PU leads to more effective spectrum usage for SUs, and an external device for providing information of PU is necessary. However, it is difficult for SU to obtain the information about activity of PU individually according to the position of SU and it may lead to a performance degradation on PU protection.

The idea of Spectrum Database has been studied for assisting SUs to effectively reuse the spectrum. SUs can access the database to obtain the surrounding radio environment information and optimize their own parameters, such as modulation, transmitting power and so on. Federal Communication Committee (FCC) has been considered a propagation model-based spectrum database to provide the spectrum available information whether the spectrum locating SU can be used or not [3]. The model-based database has to set a large margin to avoid interference to PU because the realistic radio environment with considering the effect of surrounding obstacles cannot be considered. Therefore, there is a limit to improve the spectrum utilization efficiency.

Authors in [5, 6, 7] proposed a measurement-based spectrum database as a realistic method. The measurement-based database generates the database information by gathering the measuring received power at SUs, which are inactive for communication. Then the real radio propagation situation can be known and more accurate information at SU

location can be provided. Then, SUs access to the database with their own location information and download the responding average received signal power at the SU location as shown in Fig.1.5.

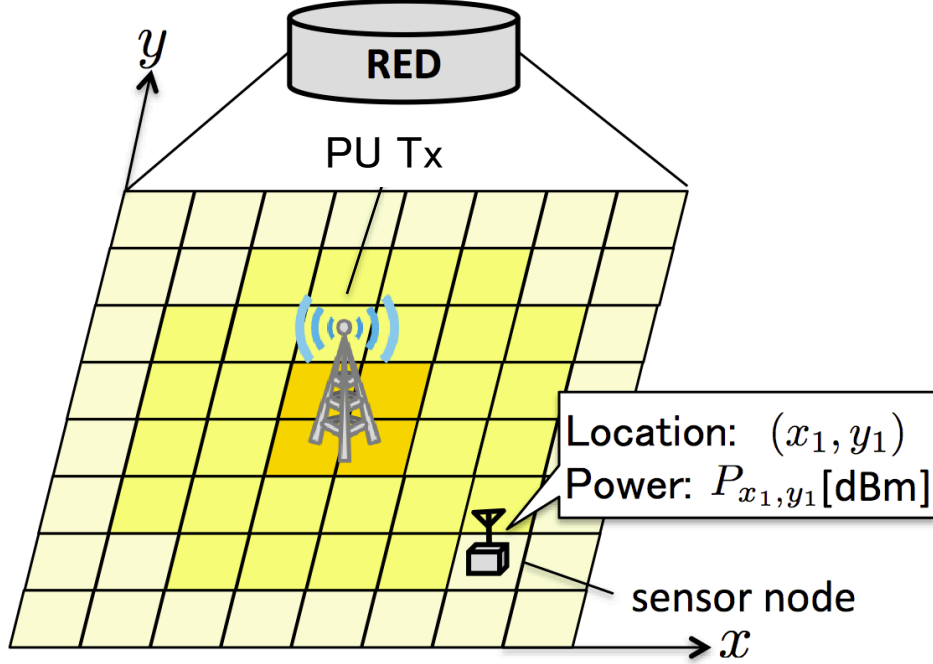


Figure 1.5: Measurement-based Spectrum Database.

The database is constructed by using reported measurement results of averaged sampling value in each sensor node like energy detection spectrum sensing algorithm to calculate the average received signal power at each location. However, it is only appropriate under the assumption that the PU status is always ON. For example, in [8][9], the channel scenario is not considering primary user traffic during the sensing period. If there is a state transition from ON to OFF, sensor node will report the wrong received signal power to the database, which leads to low reliability and performance. Thus, it is necessary to detect PU's state transition and extract the ON part only to the database to improve the reliability of database. In [10], single status change of primary user is focused.

1.3 Purpose

In this thesis, we focus on a distribution transition between the ON status and OFF status, CUSUM (cumulative sum) algorithm [13] and GLR (Generalized Likelihood Ratio) algorithm [14] are used to detect the rise up point and rise down point, which is status

change point from OFF to ON and ON to OFF. Finally, only ON power can be extracted with using the detected transition point and the sensing error reduction is possible.

The remainder of this thesis is organized as follows. The overview of Cognitive Radio and Spectrum Sharing with Spectrum Database is introduced in Chapter 2. In Chapter 3 the basic sensing method for calculating the reported information is presented as a measurement-based spectrum database construction metrics and the problem of Spectrum database construction is described in detail. Chapter 4 proposes the active period detection method of primary signal for spectrum database in detail and the simulation results and performance evaluation are discussed in Chapter 5. Finally, Chapter 6 concludes the thesis.

Chapter 2

Cognitive Radio

In Chapter 2, cognitive radio technology for spectrum sharing is described in detail. Also, as one of the applied technology, spectrum sharing with spectrum database is discussed.

2.1 Overview of Cognitive Radio

Cognitive Radio(CR) is defined as the technology that wireless communication devices are able to be aware of the surrounding environment and configure communication parameters autonomously. Frequency in use, Modulation method, Transmission power all can be treated as communication parameters. Because the adaptive parameter configuration can make an effective usage on White Space possible, it is expected as a solution to the shortage of the spectrum resources.

As a process for Secondary User communication, a series of algorithm named as Cognitive Cycle[3] is proposed by J.Mitola III in 1999. With observing Outside World, Secondary User can obtain various information. Next, after analysis is executed based on information from observation, results are oriented by priority and process is carried out depending on the determined oriented result. If the status has to be responded instantaneously, the appropriate Act needs to be reacted immediately with using the information obtained. For example, when the status of Primary User changes to ON, Secondary User has to stop transmission immediately. Otherwise, in the case that an urgent status exists, an act needs to be determined based on the information. As an example, when Secondary User has an effect on primary signal with huge interference power, it is necessary to move to the phase which is stopping transmission or lower the interference power. If the priority is Normal, an optimised Plan is determined with a long-term observation. While the radio environment changes, the observation will be observed again. At the end, the Cognitive Cycle is possible based on the process below.

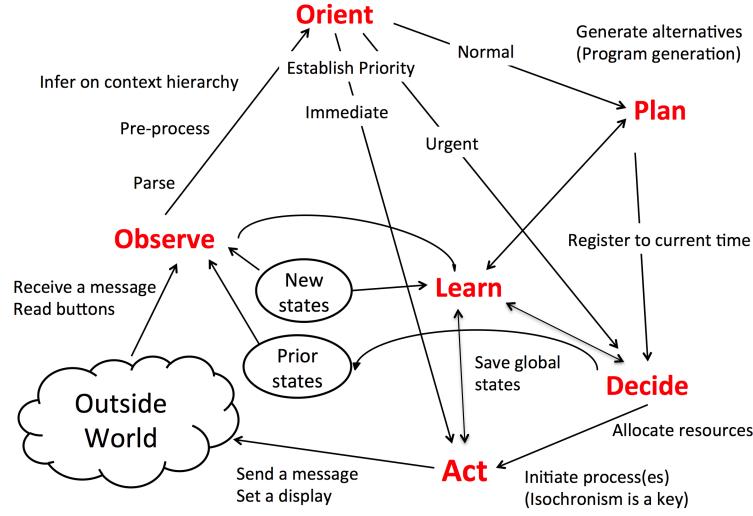


Figure 2.1: Cognitive Cycle.

The protection of Primary transmission is related to the observation and determination. The signal from Primary User, the own location information from Global Position System(GPS), and the sensing information from other nodes can be treated as the observation data. Next, the determination process is optimally executed according to the observation data. Whether the Primary User existence can be determined accurately plays an key role to the cognitive radio systems.

In this thesis, we focus on the observe and Orient process in the cognitive cycle for our proposed method.

2.2 Multi-mode System

Cognitive Radio technology which is researched actively is roughly divided into two types: Multi-mode System and Dynamic Spectrum Access. In Multi-mode System as illustrated in Fig. 2.2, Secondary User is allowed to detect the temporally and spatially unused licensed band and utilize the spectrum with same behavior as Primary User. If the Quality of Service(QoS) is not able to be achieved from the certain spectrum band, Secondary User switches to another spectrum. While Multimode system is realized as a easier method than Dynamic Spectrum Access with the reason that the communication method has already been established, the spectrum usage efficiency is not remarkable due to the upper limitation on the communication scheme of Primary User.

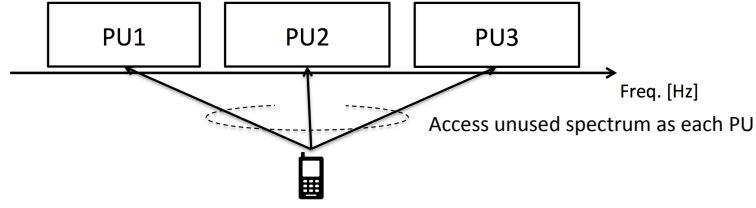


Figure 2.2: Multi-mode System.

2.3 Dynamic Spectrum Access for Spectrum Sharing

As Dynamic Spectrum Access is possible for more flexible spectrum utilization, huge spectrum usage efficiency improvement. In the Dynamic Spectrum Access, Secondary Users are able to detect the spectrum and access to it with lower priority than Primary User of that spectrum. As a constraint, harmful interference toward Primary User is not allowed. The method about how to access to the spectrum is composed of two types, which is defined as Overlay Spectrum Sharing[11] and Underlay Spectrum Sharing[12].

2.3.1 Overlay Spectrum Sharing

As illustrated in Fig.2.3, Unused White Space is utilized for communication in Overlay Spectrum Sharing. If the existence of Primary User in this spectrum is accurately detected by Secondary User, the protection of Primary User will be possible and the opportunity for Secondary User can be gained. In other words, the detection method on Primary User is the way to achieve Overlay Spectrum Sharing.

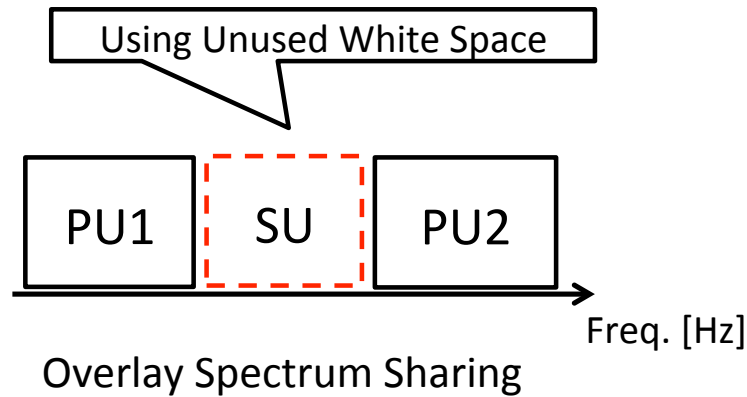


Figure 2.3: Overlay Spectrum Sharing.

2.3.2 Underlay Spectrum Sharing

Primary User protection and own performance with using appropriate communication method should be ensured.

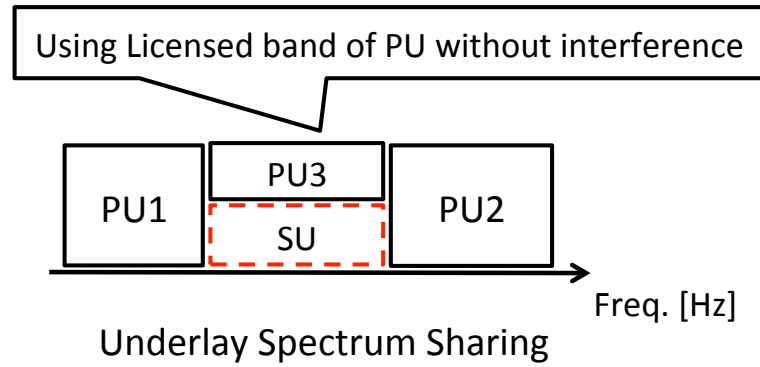


Figure 2.4: Underlay Spectrum Sharing.

2.4 Overview of Spectrum Sharing with Spectrum Database

Chapter 3

Spectrum Database

3.1 Spectrum Sharing with Spectrum Database

3.2 Measurement-based Spectrum Database

3.2.1 Spectrum Database Construction based on Energy Detection

3.3 Problem of Spectrum Database Construction

Chapter 4

Proposed Method

4.1 System Model

4.2 Transition Point Detection Method under Multiple ON/OFF Environment

4.2.1 CUSUM

4.2.2 GLR

Chapter 5

Simulation

5.1 System Model

5.2 Simulation Results

Chapter 6

Conclusion

In this paper, as a solution to the sensing error under multiple ON/OFF environment for Spectrum Database, a transition point detection algorithm is applied for the received power detection. Based on the detected transition point of the primary user status by using CUSUM algorithm and GLR algorithm. an active period of the primary user can be extracted. Transition point is well-detected and an improvement of sensing error can be confirmed through simulation results.

Acknowledgments

This paper is summarized the results of our research when the author is a student of master course in the University of Electro-Communications. I would like to express great thank to my supervisor, Prof. Fujii who always gives me great opportunities and provide me kindly feedbacks. Also, I have been helped and encouraged by Prof. Yamao, associate Prof. Ishibashi, and all the members of their laboratories.

References

- [1] Cisco, “Cisco Visual Networking Index: Global Mobile Data Traffic Forecast Update, 2014-2019,” Cisco White Paper.
- [2] Federal Communications Commission, “Spectrum policy task force report, fcc 02-155,” Nov. 2002.
- [3] J. Mitola III and G. Q. Maguire, Jr., “Cognitive radio: making software radios more personal,” *IEEE Personal Communications*, vol. 6, no. 4, pp. 1318, Aug. 1999.
- [4] S. Haykin, “Cognitive radio: Brain-empowered wireless communications,” *IEEE J. Selected Areas Commun.*, vol. 23, no. 2, pp. 201 - 220, Feb. 2005.
- [5] H. Rajib, K. Inage, M. Ohta, T. Fujii, “Measurement based radio environment database using spectrum sensing in cognitive radio,” *Proc. iCOST 2011*, Oct. 2011.
- [6] T. Fujii, K. Inage, M. Kitamura, O. Altintas, H. Kremo, H. Tanaka, “Probing the spectrum with vehicles: towards an advanced spectrum database”, *IEEE VNC 2013*, Dec. 2013.
- [7] M. Kitamura, K. Inage, Y. Ohue, T. Fujii, “Development of measurement based spectrum database for efficient spectrum sharing,” *SDR-Winncomm2014*, Mar. 2014.
- [8] G. Zhou, J. Wu, K. Sohraby, “Cooperative Spectrum Sensing with a Progressive MAP Detection Algorithm,” *Proc. GLOBECOM*, pp.1-5, Dec. 2011.
- [9] Y. Pei; Y. Liang, K.C.Teh, K. H. Li, “Sensing-throughput tradeoff for cognitive radio networks: A multiple-channel scenario,” *Proc. IEEE PIMRC*, pp.1257-1261, 13-16 Sept. 2009.
- [10] L.Lai, Y.Fan, and H.V.Poor, “Quickest Detection in Cognitive Radio: A Sequential Change Detection Framework,” *Proc. IEEE Globecom*, Dec. 2008.

- [11] Vameghestahbanati, M. and Mir, H.S. and El-Tarhuni, M., “ An overlay architecture for cognitive radio systems,” Proc. IEEE ICCSPA, pp.1-4, Feb. 2014.
- [12] H. Hu and Q. Zhu, “Dynamic Spectrum Access in Underlay Cognitive Radio System with SINR Constraints,” Proc. IEEE WiCompp. 1-4, Sept. 2009.
- [13] E. Page, “Continuous inspection schemes,” *Biometrika*, vol. 41, pp. 100-115, 1954.
- [14] G. Lorden, “Procedures for reacting to a change in distribution,” *Annals of Mathematical Statistics*, vol. 42, no. 6, pp. 1897-1908, 1971.
- [15] G. Lorden, “ON excess over the boundary,” *Annals of Mathematical Statistics*, vol. 41, pp.520-527, Apr. 1970.
- [16] G. Lorden, “Open-ended tests for Koopman-Darmois families,” *Annals of Statistics*, vol. 1, no. 4, pp. 520-527, Apr. 1970.

Publications

International Conference Papers

- i. Hao Wang, Takeo Fujii, "Transition detection with Spectrum Database using Weighted Cooperative Sensing," Proc IEEE ICUFN, July. 2014.
- ii. Hao Wang, Takeo Fujii, "Active Period Detection Method of Primary Signal for Radio Environment Database," SmartCom2015, SR2015-50, pp. 21-22, Oct. 2015.
- iii. Hao Wang, Koya Sato, Takeo Fujii, "Received Power Detection under Multiple ON/OFF Environment for Registering Radio Environment Database," Proc IEEE ICTC, Oct. 2015.
- iv. Koji Ichikawa, Hao Wang, Koya Sato, Takeo Fujii, "Height Power Estimation with Radio Environment Database in Urban Area," Proc IEEE IFUCN, July. 2015.

Domestic Conference Papers

- i. 王昊, 中川洸佑, 北村優行, 藤井威生, "重み付け協調センシングを用いた無線環境データベースによる状態遷移検出法," 信学総大, B-17-19, March 2016.
- ii. 王昊, 藤井威生, "重み付け協調センシング及び電波環境データベースを用いたプライマリユーザの状態遷移検出法の一検討," 信学技報 SR2015-1, pp. 1-6, May 2015.
- iii. 市川浩次, 王昊, 佐藤光哉, 藤井威生, "市街地環境における電波環境データベース連携による高さ方向の信号電力推定," 信学技報 SR2015-2, pp. 7-12, May 2015.
- iv. 王昊, 佐藤光哉, 藤井威生, "フェージング環境におけるプライマリユーザ信号の時間的変化を考慮したデータベース精度向上法の検討," 信学技報 SR2016-1, pp. 1-6, March 2016.
- v. 長谷川嶺, 王昊, 藤井威生, "電波環境データベース精度向上のための観測データクラスタリング法," 信学総大, B-17-19, March 2016.

Appendix

From the next page, the program source is attached.