


GFL:  $\mu = 240$ , 400 V DC

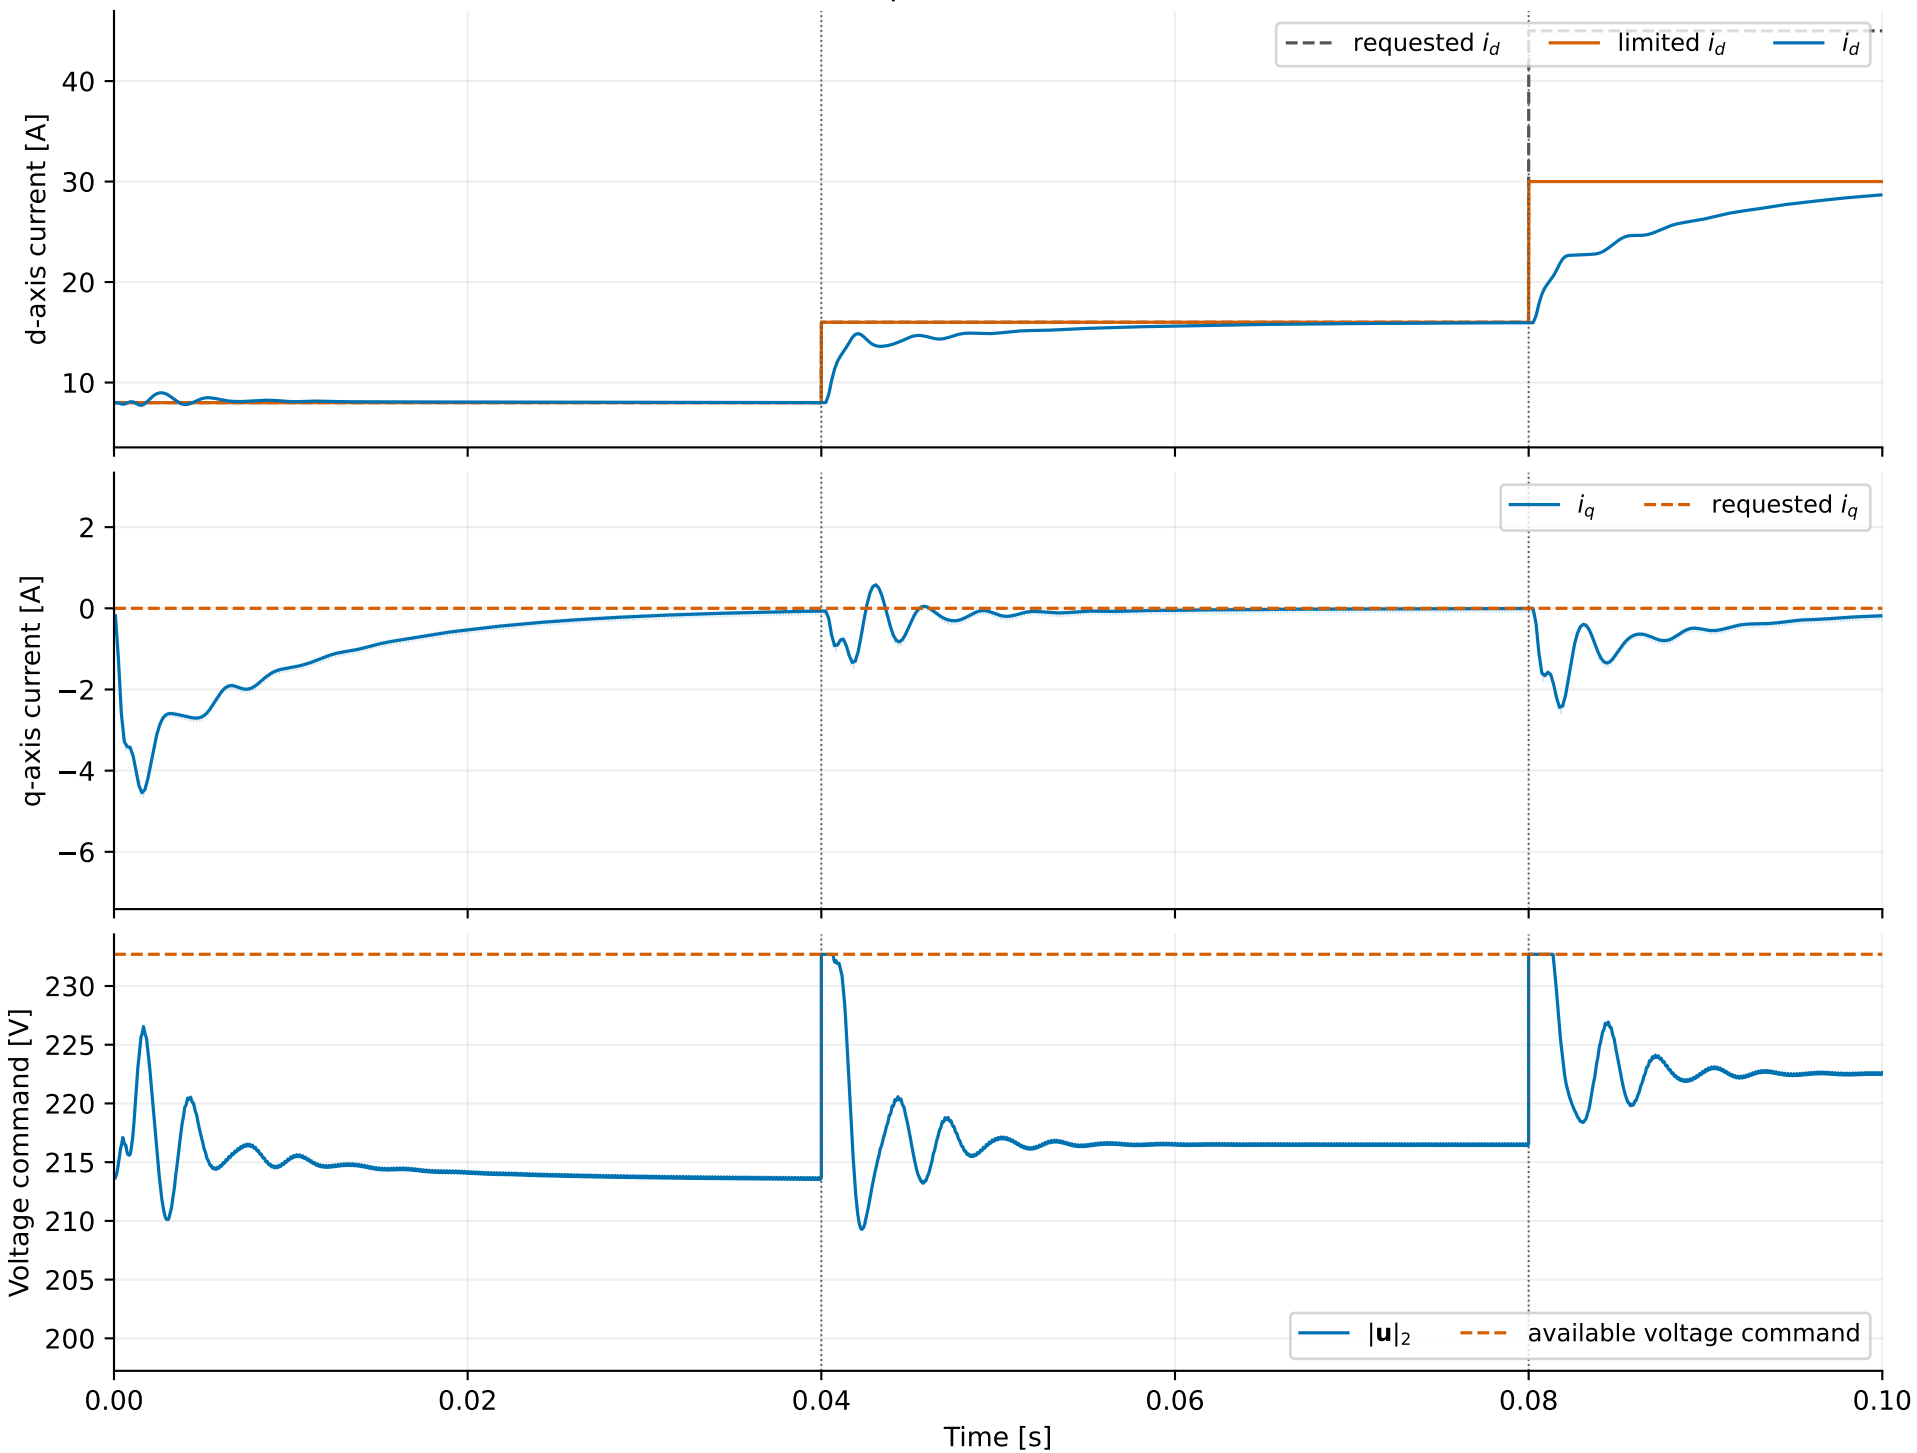

Feedback traces: faint instantaneous values; solid carrier-period means.