




A

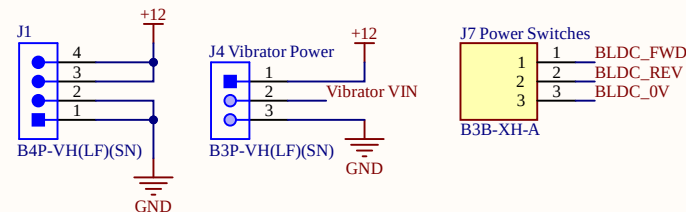






B

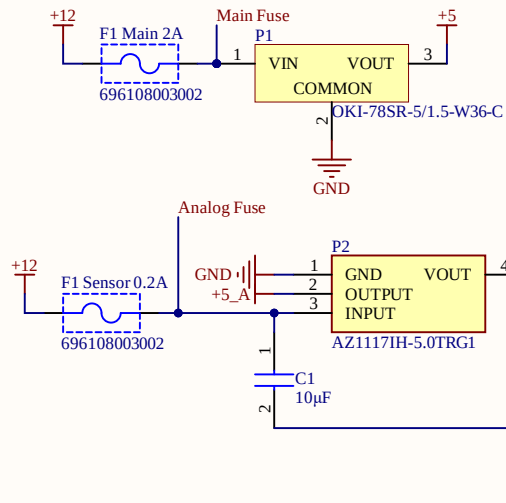


C

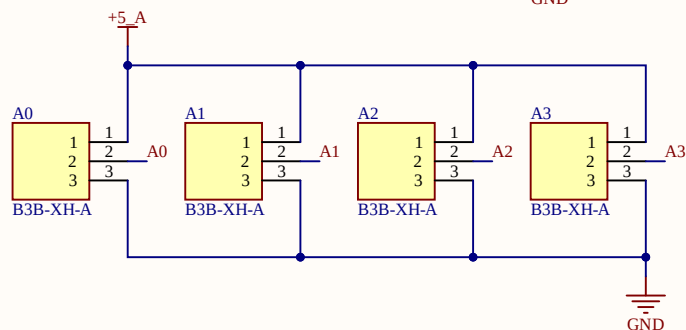


D

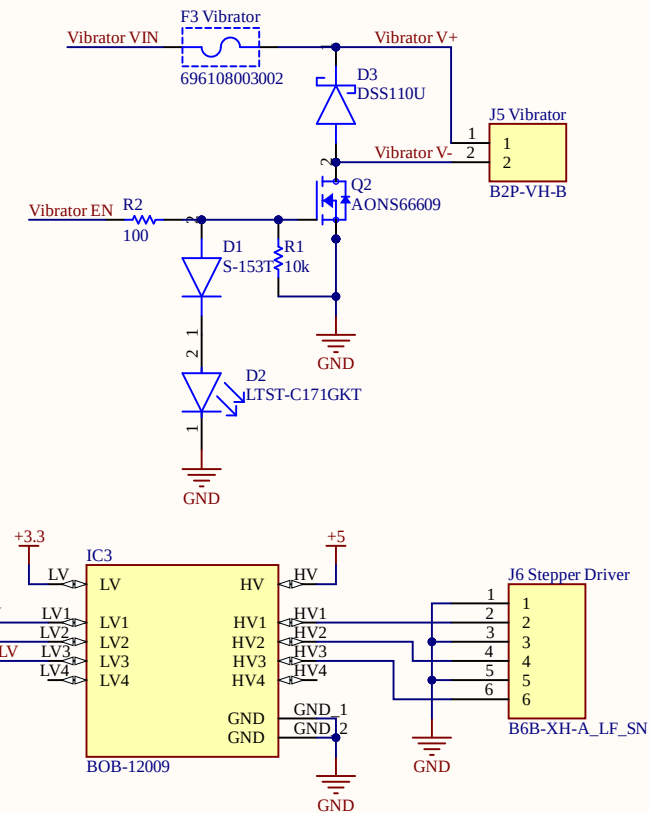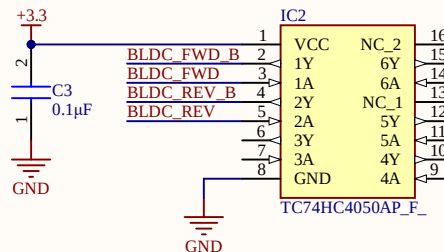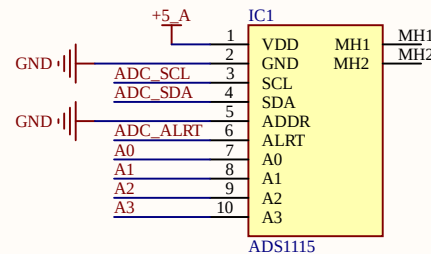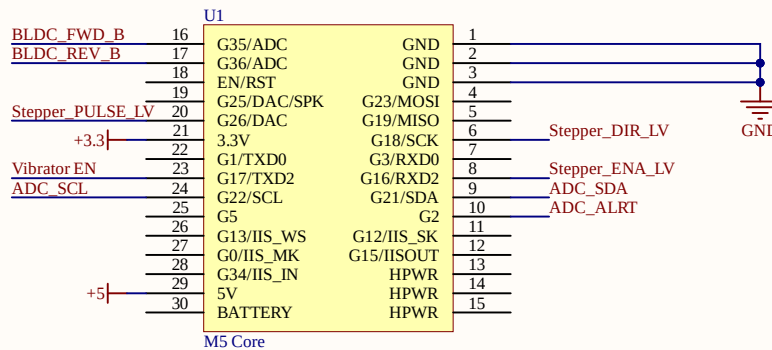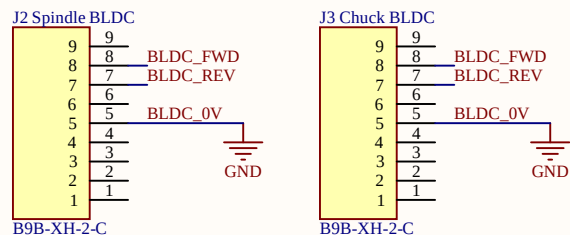

Title		
Size	Number	Revision
A4		
Date:	2/20/2025	Sheet of
File:	C:\Users\...\polishing_machinie.SchDoc	Drawn By:

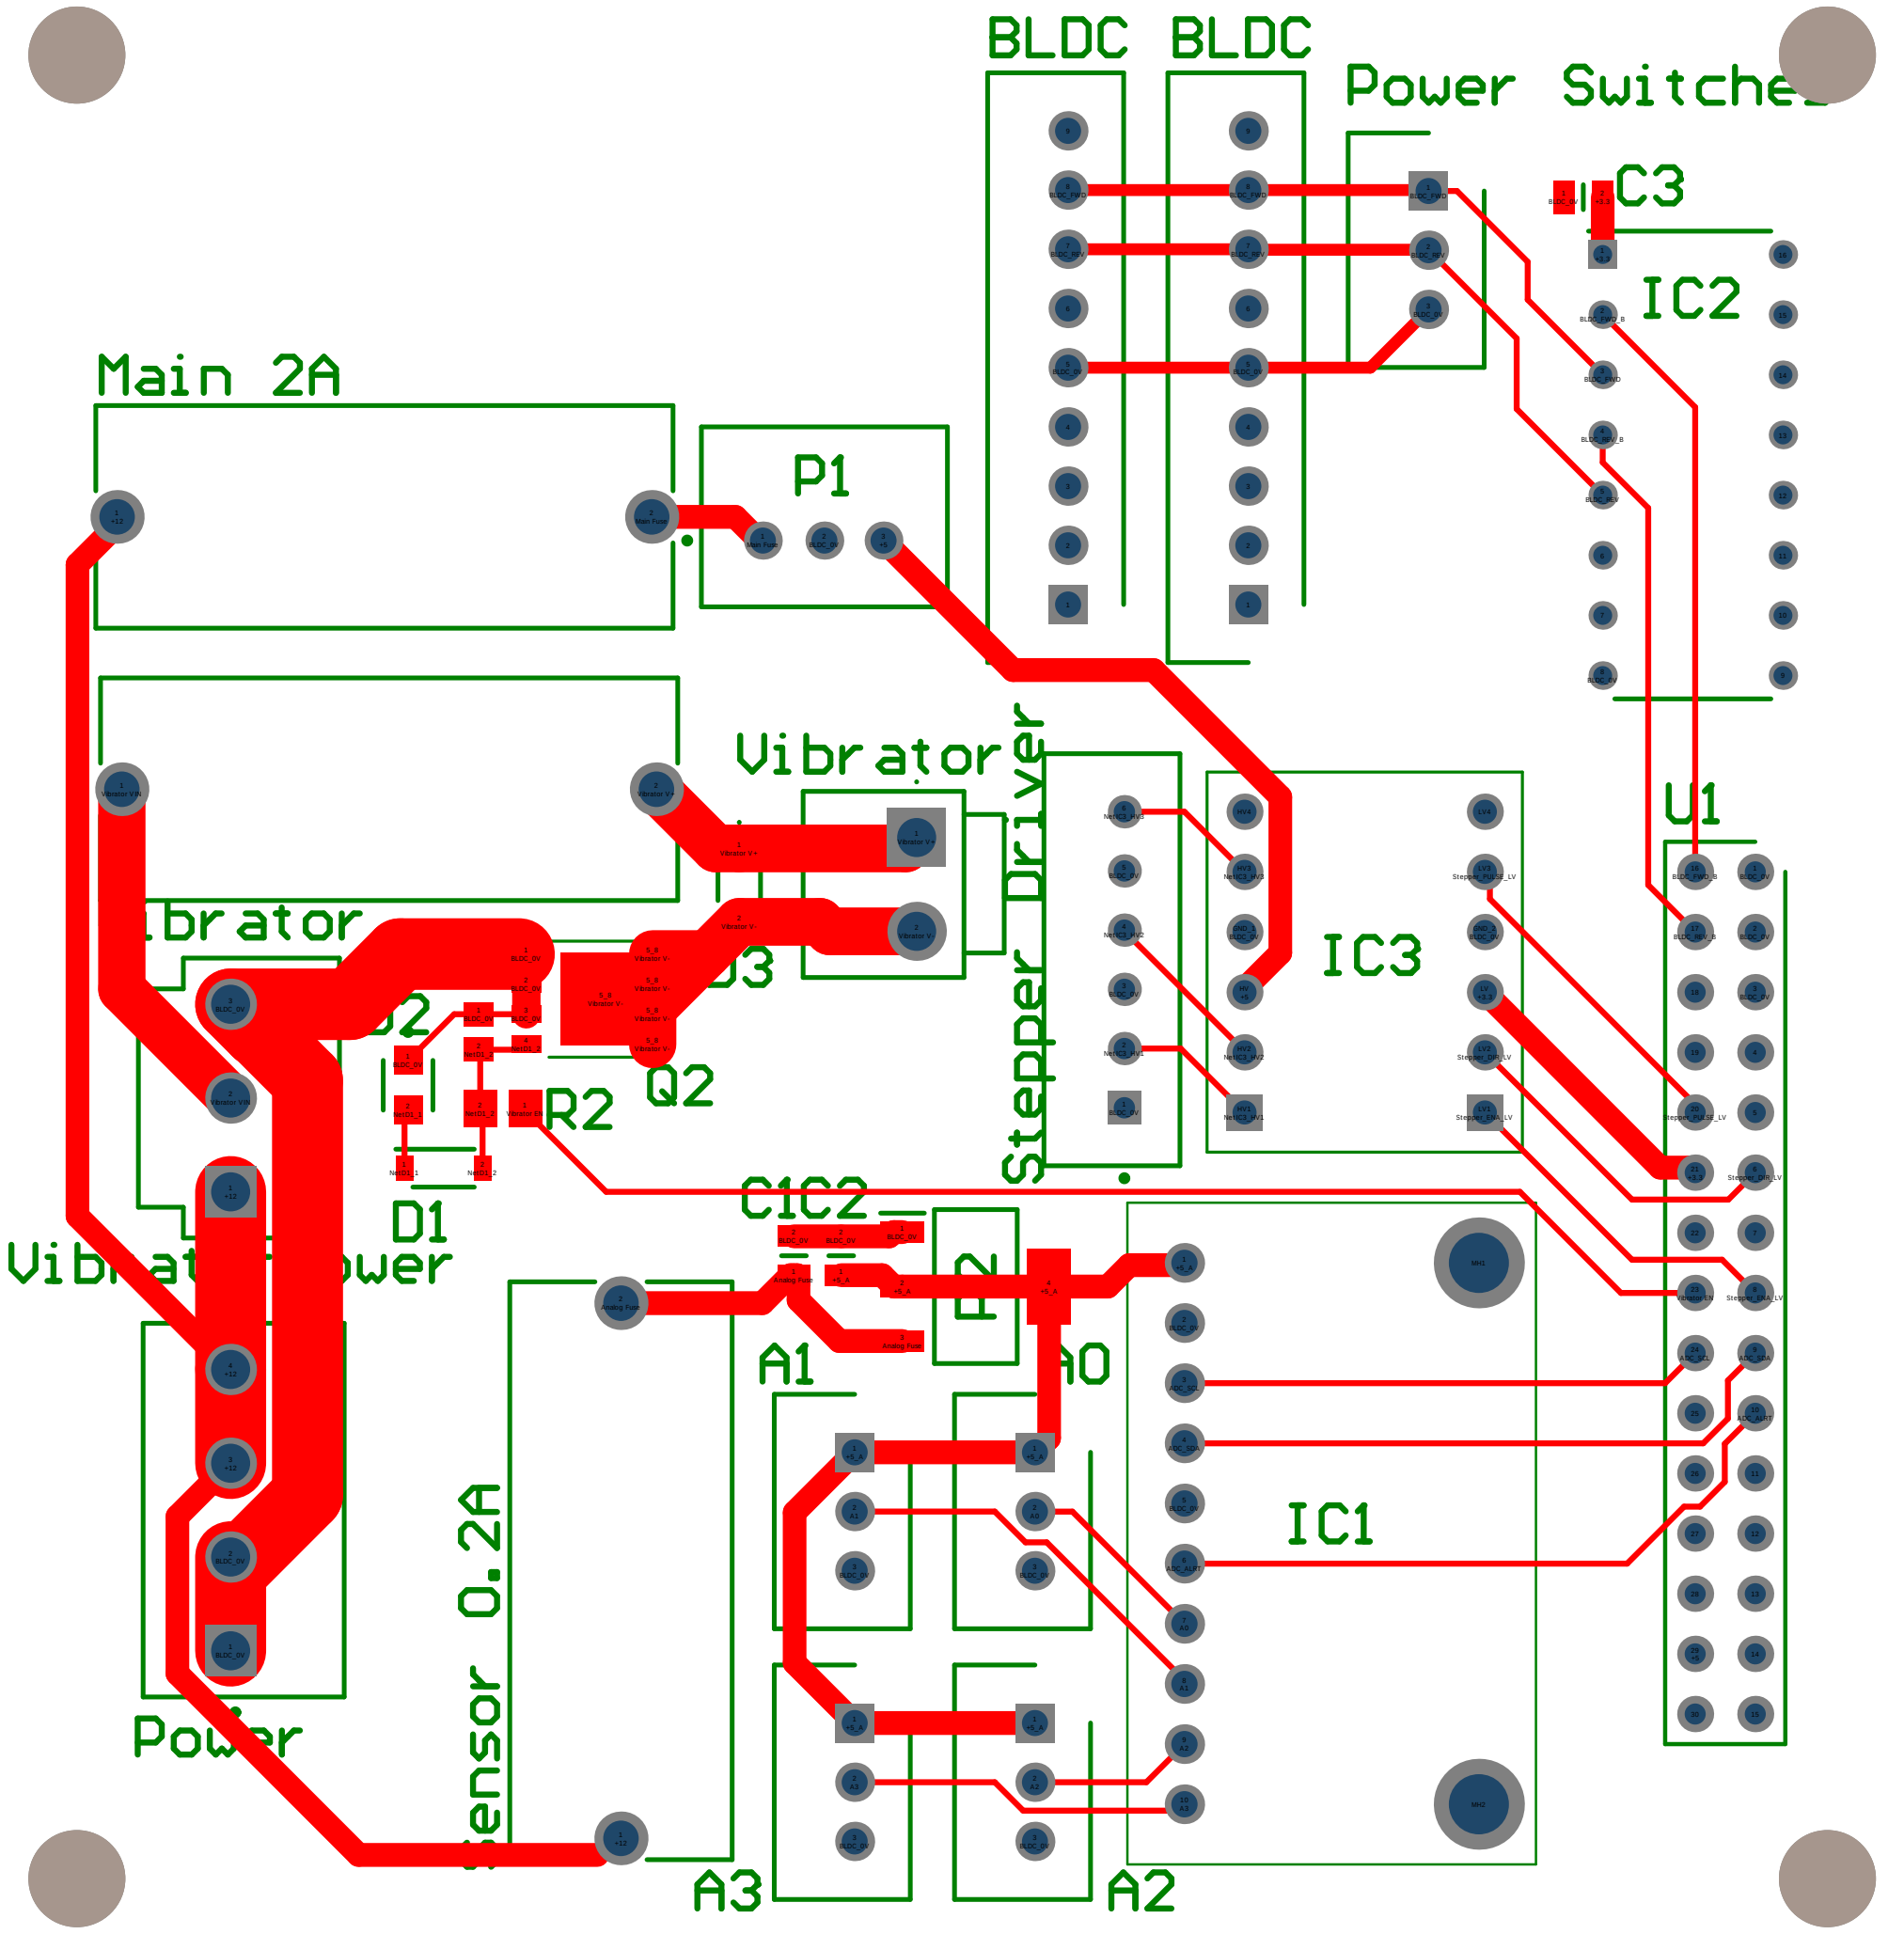

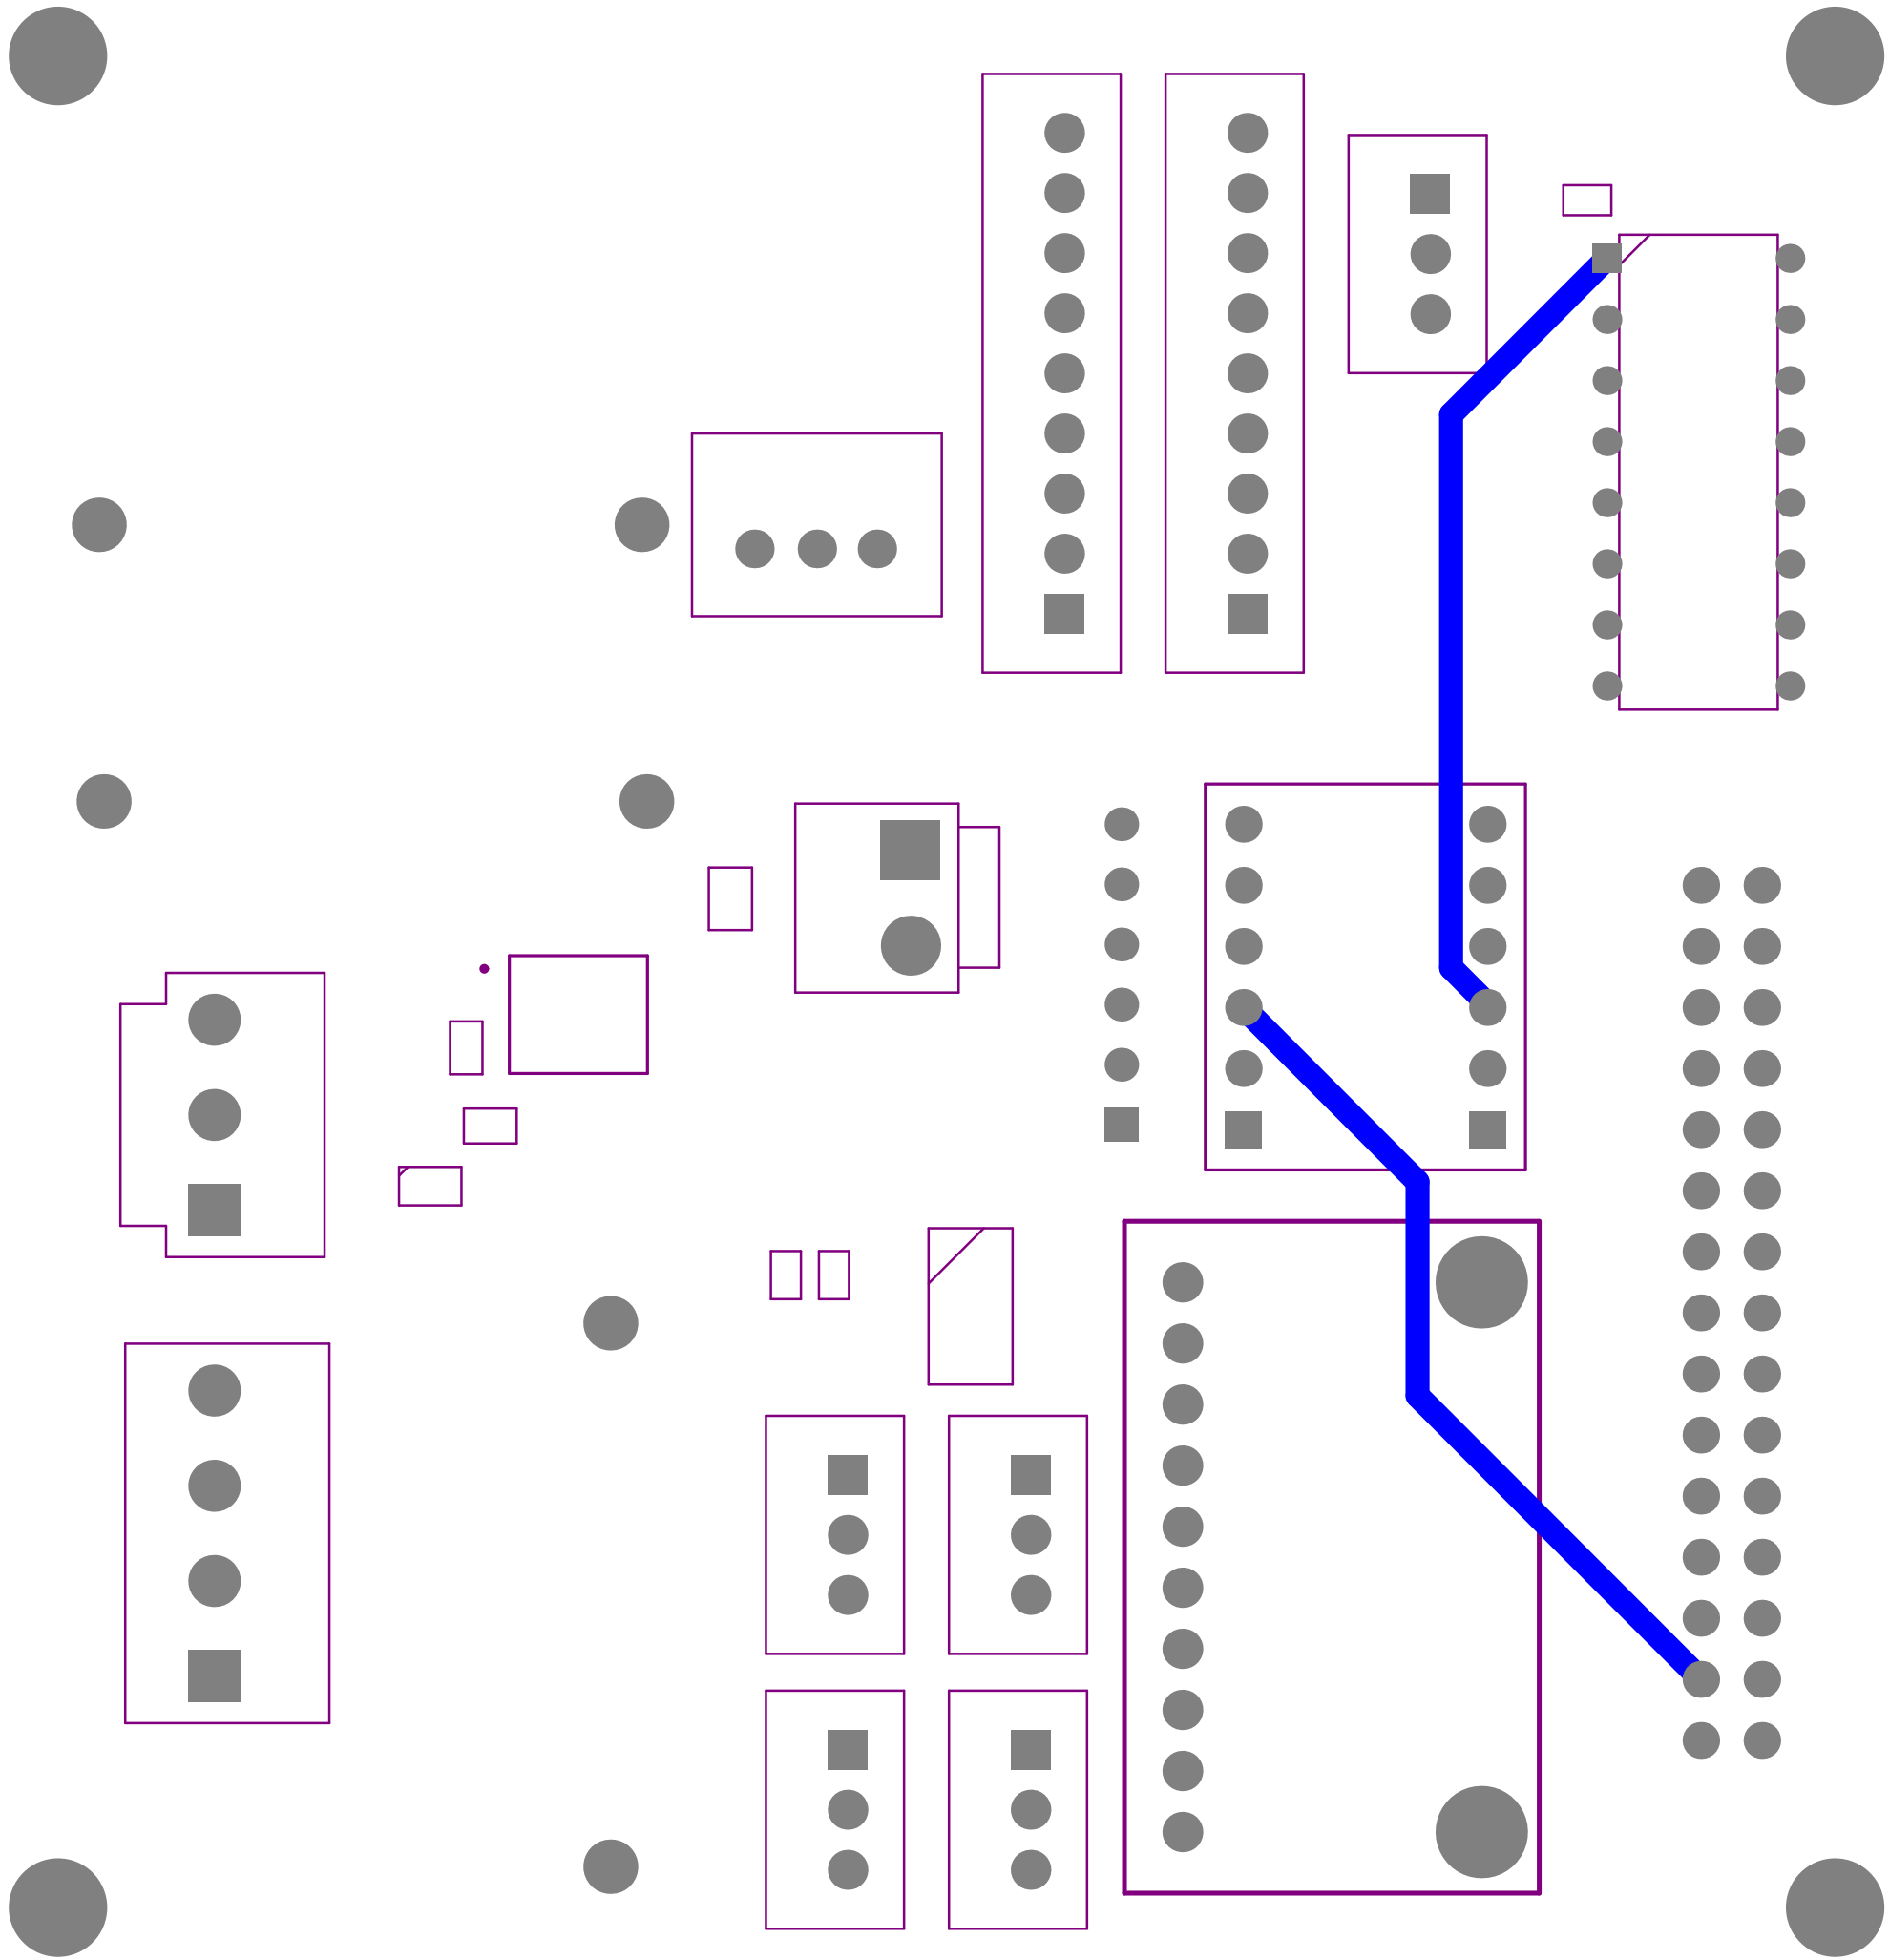

Comment	Description	Designator	Footprint	LibRef	Quantity
B3B-XH-A	Connector	A0, A1, A2, A3, J7 Power Switches	SHDR3W64P0X250 _1X3_990X575X700 P	B3B-XH-A	5
10 μ F	Capacitor	C1	CAPC2012X95N	GRM219B31C106K A73D	1
22 μ F	Capacitor	C2	CAPC2012X95N	GRM219B31A226M EA0D	1
0.1 μ F	Capacitor	C3	CAPC2012X70N	GRM216F51E104Z A01D	1
S-153T	Diode	D1	SODFL3516X70N	S-153T	1
LTST-C171GKT	LED GREEN CLEAR CHIP SMD	D2	FP-LTST- C171GKT-MFG	CMP-22017- 000007-1	1
DSS110U	Schottky Diode	D3	DSS110U	DSS110U	1
696108003002		F1 Main 2A, F1 Sensor 0.2A, F3 Vibrator	696108003002	CMP-1502-00237-2	3
ADS1115	Integrated Circuit	IC1	ADS1115	ADS1115	1
TC74HC4050AP_F_	Integrated Circuit	IC2	DIP762W60P254L1 975H445Q16N	TC74HC4050AP_F_	1
BOB-12009	BSS138 Logic- Level Translator Interface Evaluation Board	IC3	CONV_BOB-12009	BOB-12009	1
B4P-VH(LF)(SN)	Male Header, Pitch 3.96 mm, 1 x 4 Position, Height 10.9 mm, Tail Length 3.7 mm, -25 to 85 degC, RoHS, Bulk	J1	JST-B4P- VH(LF)(SN)_V	CMP-2000-05905-1	1
B9B-XH-2-C	Connector	J2 Spindle BLDC, J3 Chuck BLDC	SHDR9W64P0X250 _1X9_2490X575X70 0P	B9B-XH-2-C	2
B3P-VH(LF)(SN)	Male Header, Pitch 3.96 mm, 1 x 3 Position, Height 10.9 mm, Tail Length 3.7 mm, -25 to 85 degC, RoHS, Bulk	J4 Vibrator Power	JST-B3P- VH(LF)(SN)-3_V	CMP-1755-00003-1	1
B2P-VH-B	Connector	J5 Vibrator	B2PVHB	B2P-VH-B	1
B6B-XH-A_LF_SN		J6 Stepper Driver	FP-B6B-XH- A_LF_SN-MFG	B6B-XH-A_LF_SN	1
OKI-78SR-5/1.5- W36-C	Non-Isolated DC/DC Converter, 7.5 W, 7 to 36 V, 1.5 A, -40 to 85 degC, 3-Pin THD, RoHS	P1	MURA-OKI-78SR-3	CMP-2000-05274-1	1
AZ1117IH-5.0TRG1	Integrated Circuit	P2	SOT230P700X180- 4N	AZ1117IH-5.0TRG1	1
AONS66609	N-Channel 60 V 10A (Ta), 51A (Tc) 3.1W (Ta), 83W (Tc) Surface Mount 8-PDFN (5.2x5.75)	Q2	AONS66609	AONS66609	1
10k	Metal Film Chip Resistor, High Reliability Type, 0.125 W, +/- 0.1%, -55 to 155 degC, 0805 (2012 Metric), RoHS, Tape and Reel	R1	RESC2013X60X40L L20T25_A	CMP-2001-00582-2	1
100		R2	RESC2013X60X40 ML20T25	CMP-2001-00580-1	1
M5 Core		U1	M5 Core	M5 Core	1