ETD29 L101 OSLUV Driver

L.Fauth 12.11.2025

Change Log

Rev.	Date	Description

Layer / Side view

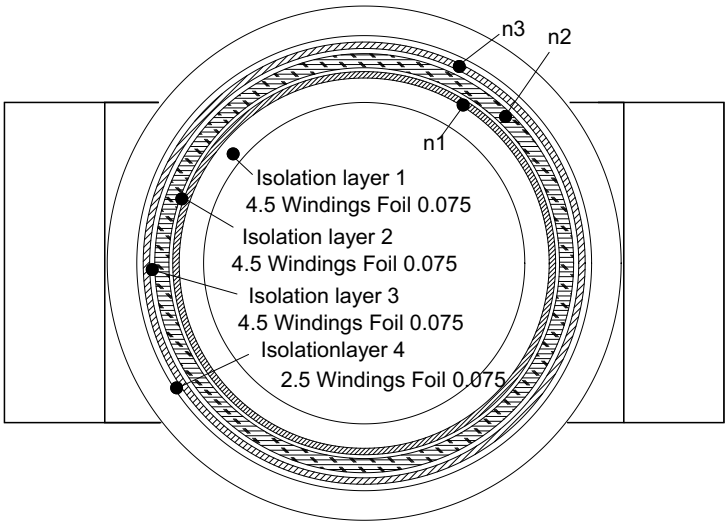

Pin assignment



Winding instructions

Winding direction CCW

		Orientation	Start	End	Iso tube (start/end)
1:	Isolation 4,5 turns Hostaphan				
2.	n1: 42 turns Tex-E 0.2mm	mid	13	5	- -
3.	Isolation 4,5 turns Hostaphan				
4.	n2: 7 turns Tex-ELZ 60x0.1	mid	6	9	40mm 40mm
5.	Isolation 4,5 turns Hostaphan				
6.	n3: 42 turns Tex-E 0.2mm	mid	2	13	- -
7.	Isolation 2,5 turns Hostaphan				

Material

Core: ETD29 N87 Air gap 0.1mm + 0.1mm
Coil former ETD29
Clips
Isolation foil Hostaphan s= 0,075mm, b= 19.4mm
Iso tube Silicone tube di= 0,7 mm

Winding n1,3 Tex E d=0,2mm
Winding n2 TEX-ELZ 60x0.1

PIN View

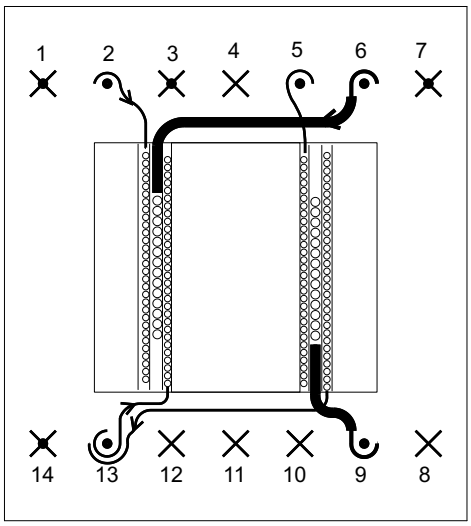

Remove Pin 1,3,4,7,8,10,11,12,14

Schematic / Isolation coordination

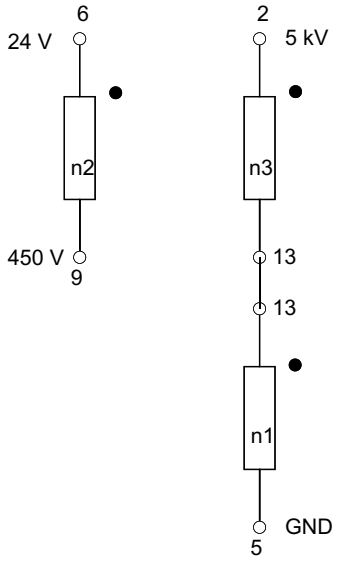

Test instructions

Primary inductance (n2, Pin 6 to Pin 9): L1 = 20 uH ± 1 uH @ 10 kHz
Isolation primary to secondary: 7 kV DC
Primary: n2 with Pin 6, 9 shorted
Seconday: n1 and n3, Pin 2, 5 shorted