F10M-R3 | Four sources, mirror ports and sealed ends

a XY projection: four source faces and two top mouths

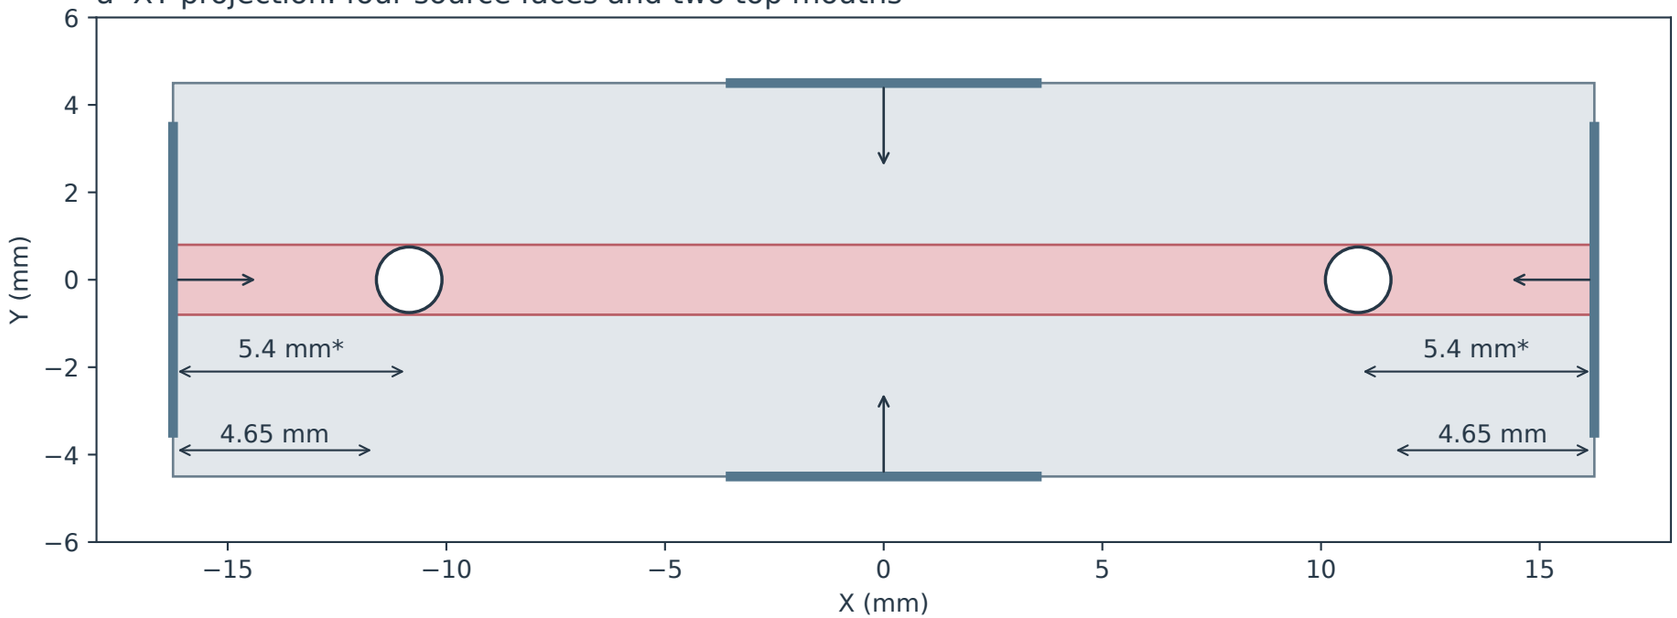

b Both X faces

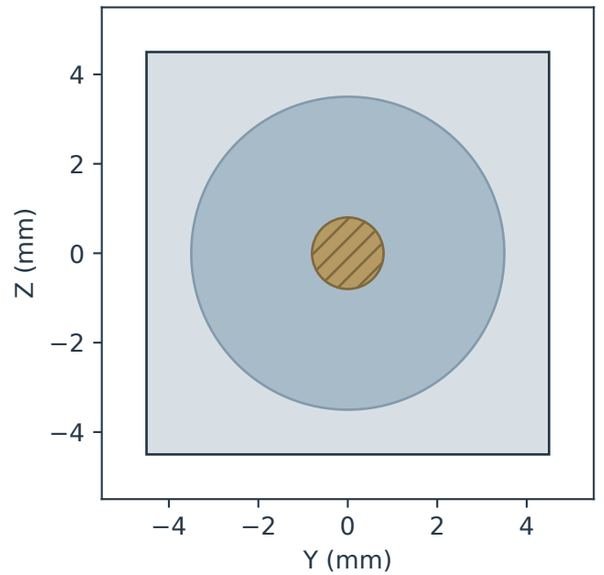

PZT face	Center (mm)	Inward unit normal
side_y_minus	[0.0, -4.5, 0.0]	[0.0, 1.0, 0.0]
side_y_plus	[0.0, 4.5, 0.0]	[0.0, -1.0, 0.0]
end_x_minus	[-16.25, 0.0, 0.0]	[1.0, 0.0, 0.0]
end_x_plus	[16.25, 0.0, 0.0]	[-1.0, 0.0, 0.0]

Both X ends: mechanically sealed

Gold: seal interface, material unknown

No assumed PDMS plug thickness

No automatic rigid acoustic reflection

* Provisional reference: end-PZT face plane to adjacent hole CENTER; center-versus-edge measurement remains unconfirmed.
4.65 mm is the geometric face-to-hole-volume clearance under that reference. PZT backing and seal-stack thickness are unknown.