Feedback response, cohesion and numerical diagnostics

(a) Target error; required sampled dwell ≥ 50 ms

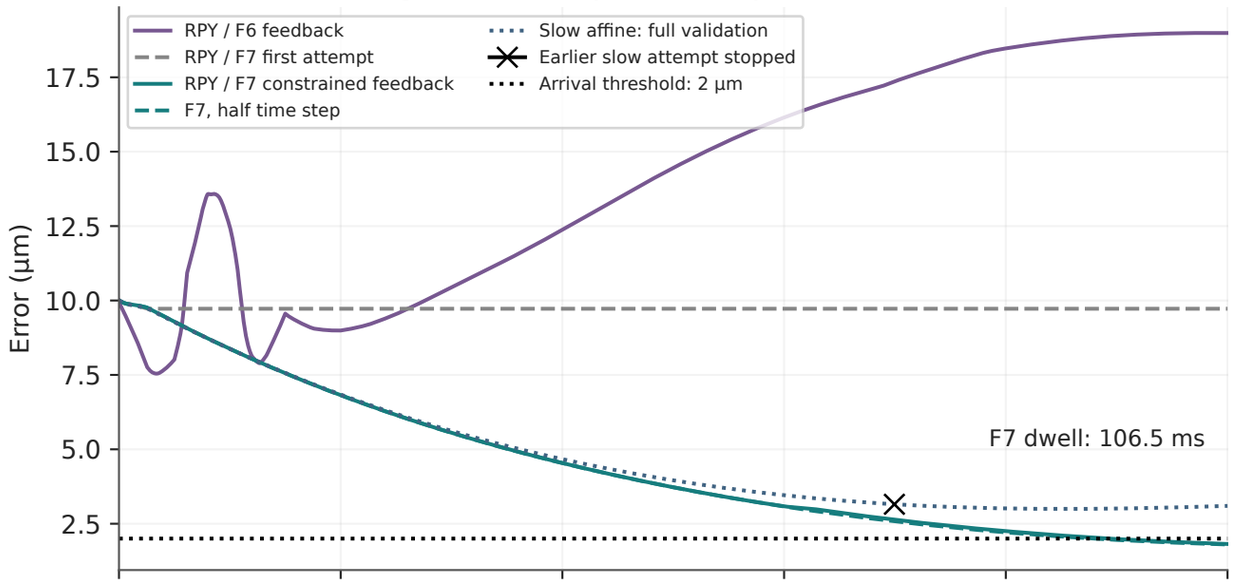

(b) F7 displacement; target ΔY = −10 µm

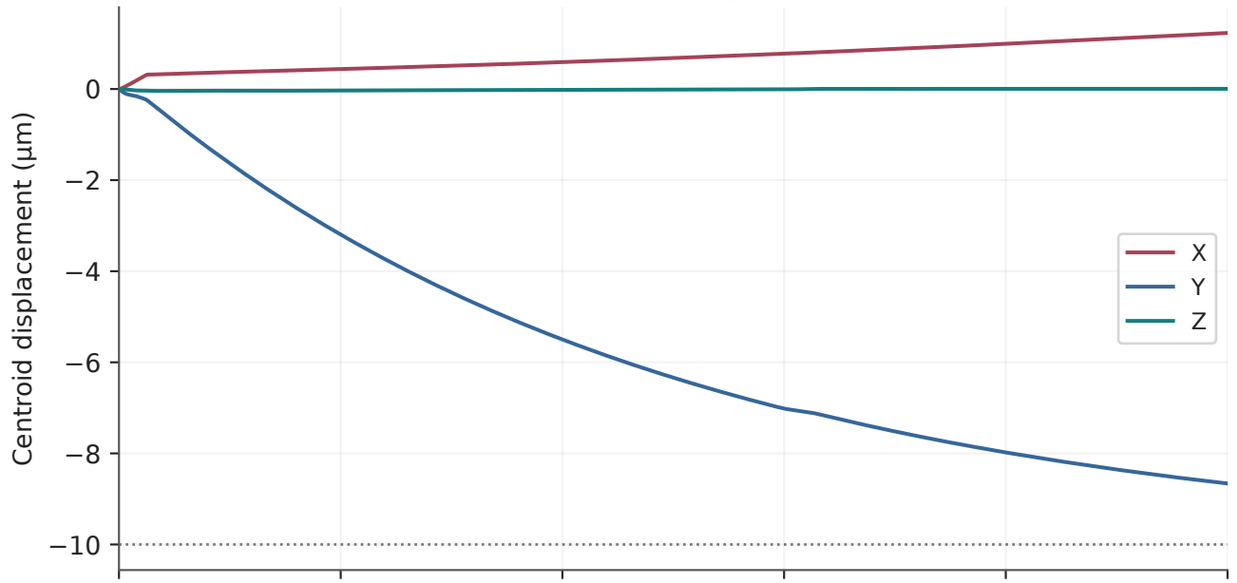

(c) Largest geometric connected component

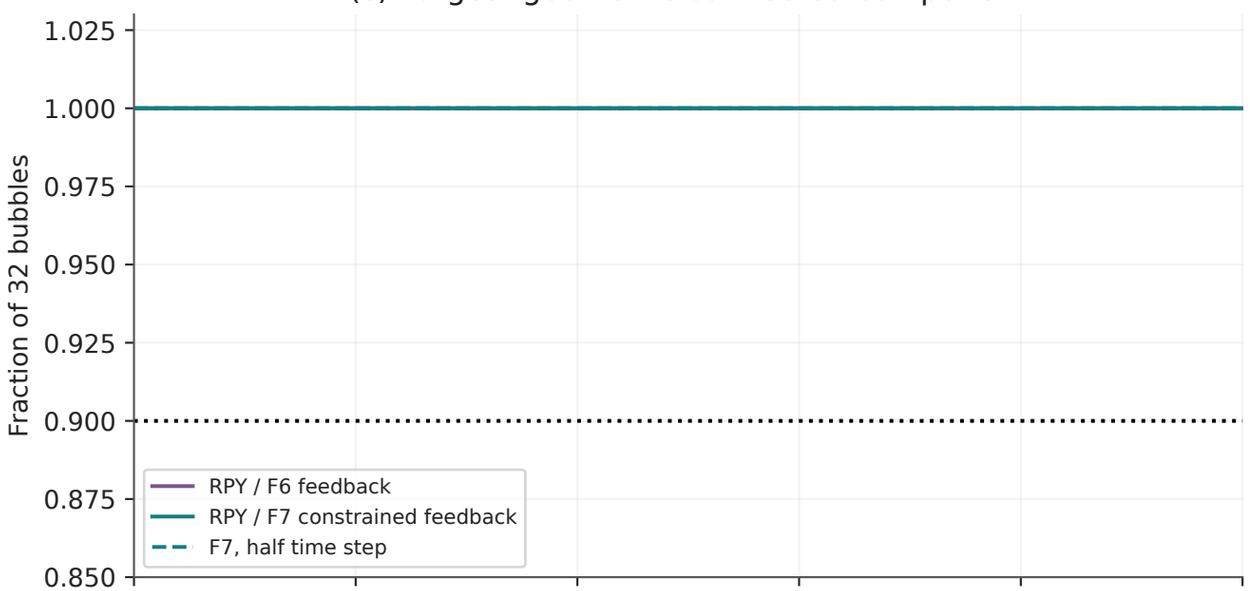

(d) Actual 25 ms control events

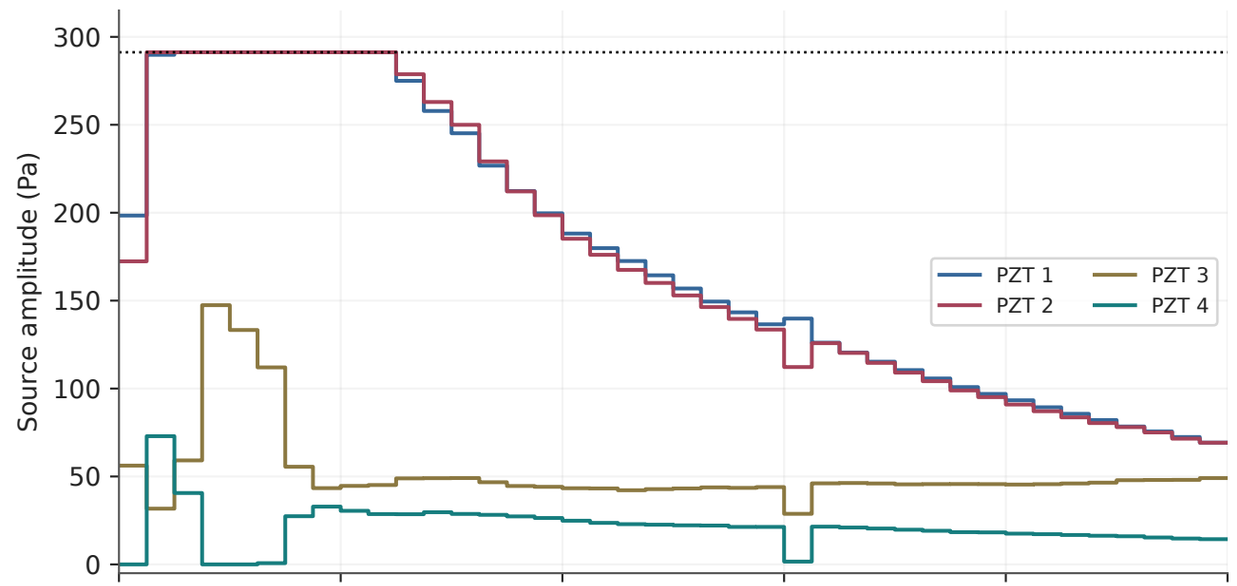

(e) Original contact quality gate

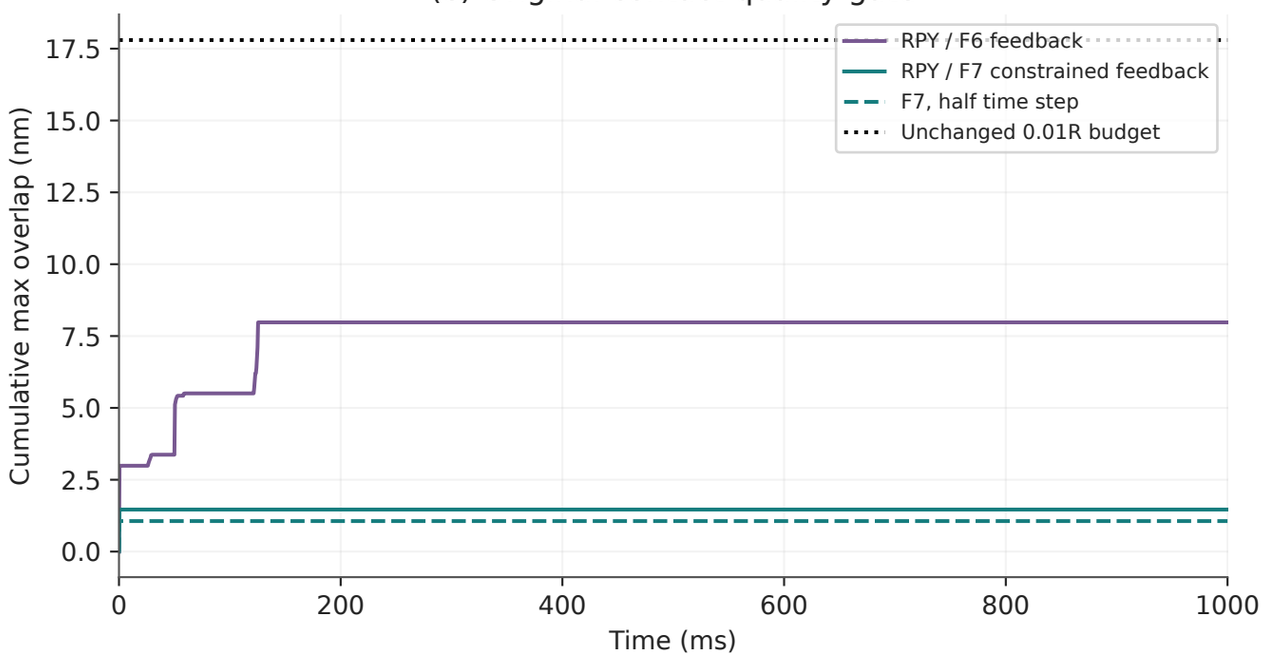
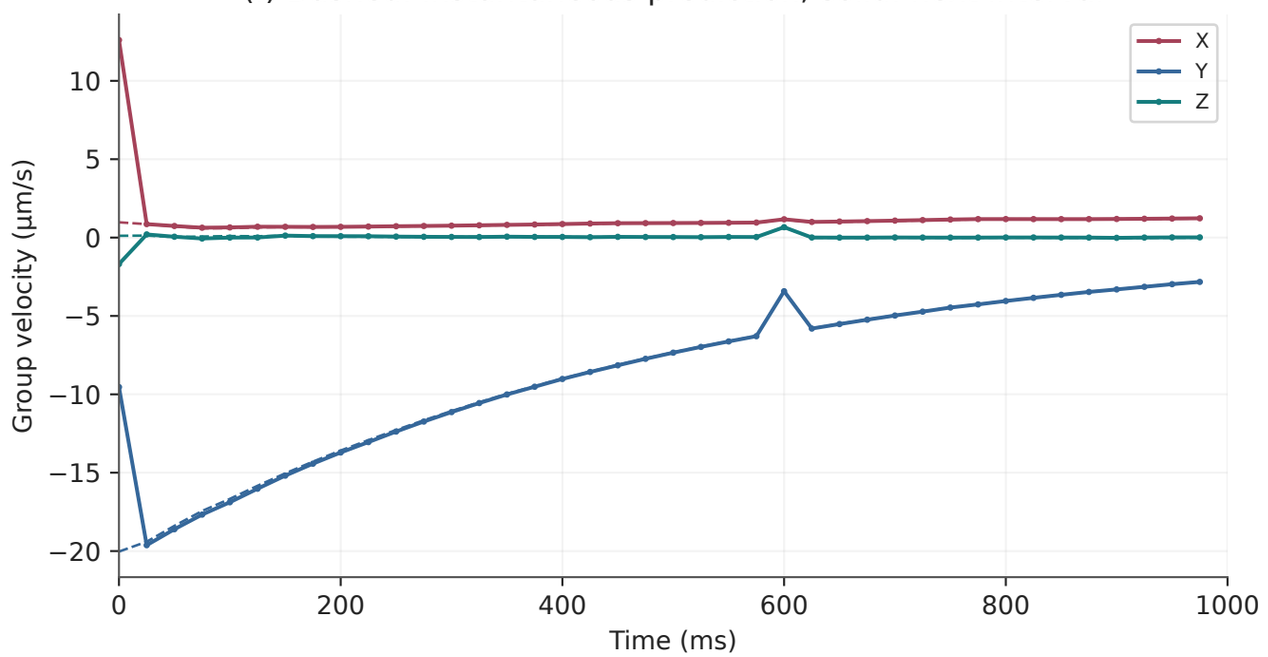
(f) Dashed: instantaneous prediction; solid: next interval