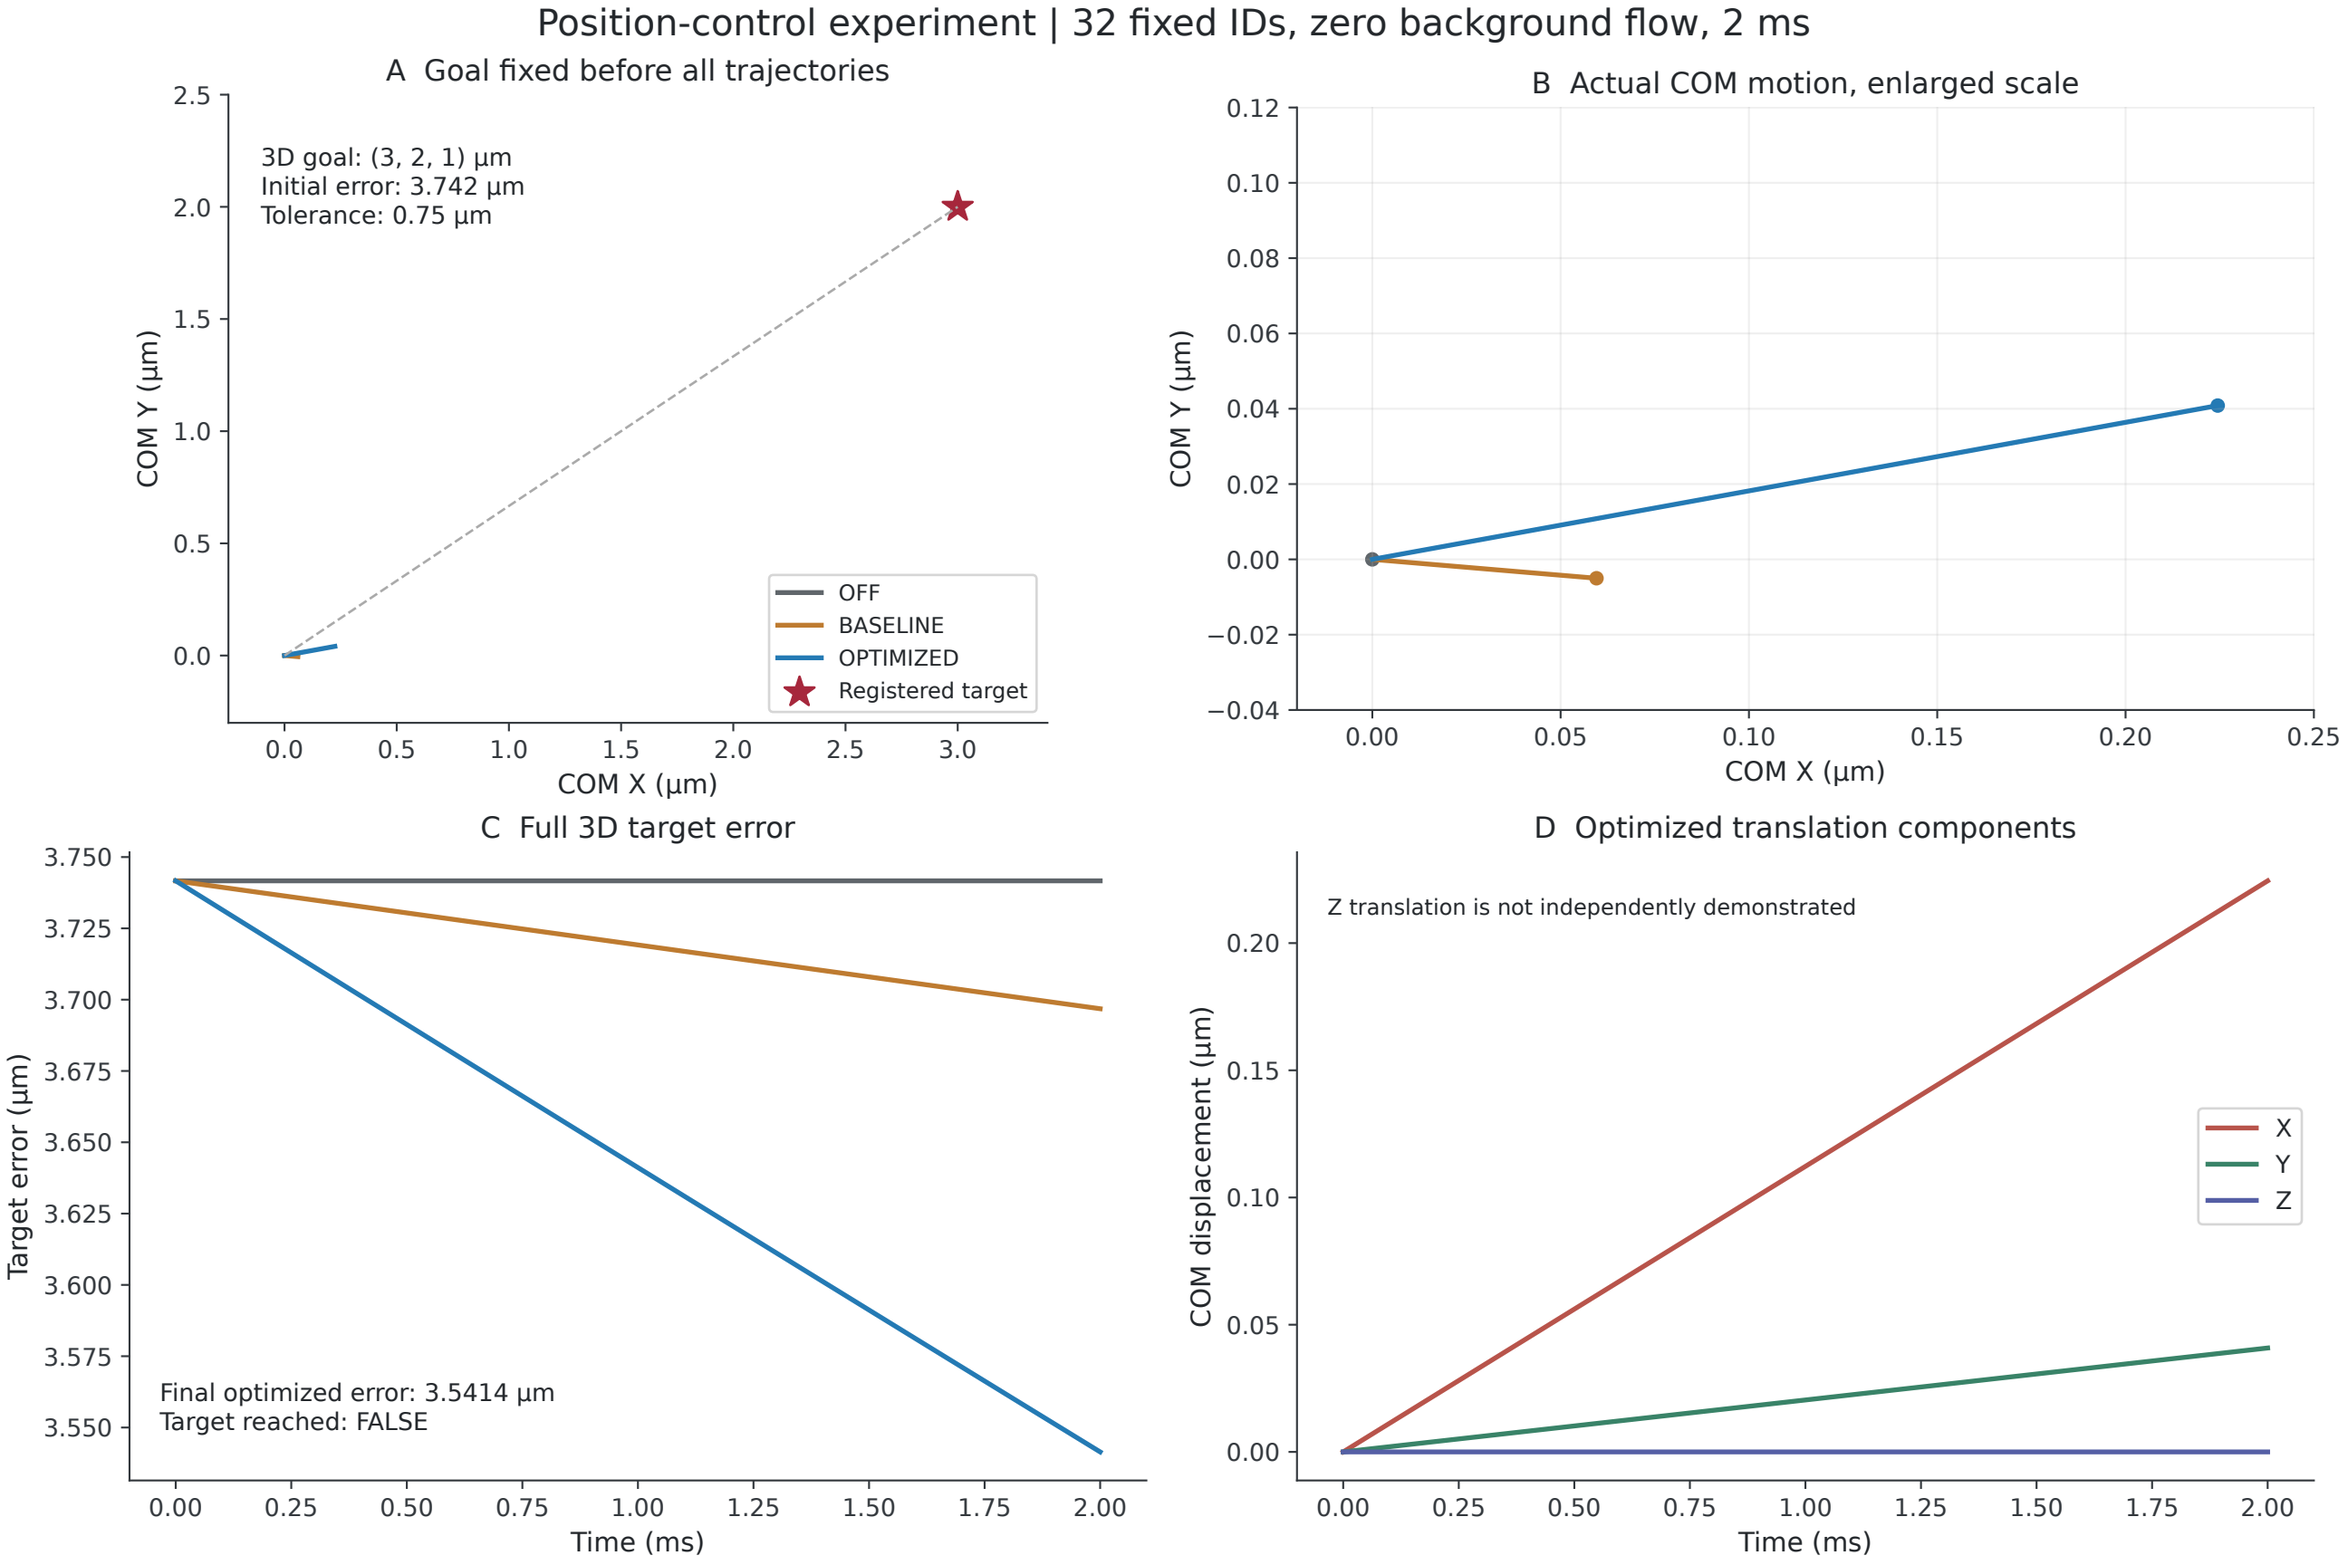
Position-control experiment | 32 fixed IDs, zero background flow, 2 ms
A Goal fixed before all trajectories
3D goal: (3, 2, 1) µm
Initial error: 3.742 µm
Tolerance: 0.75 µm
OFF
BASELINE
OPTIMIZED
Registered target
COM X (µm)
COM Y (µm)
B Actual COM motion, enlarged scale
COM X (µm)
COM Y (µm)
C Full 3D target error
Final optimized error: 3.5414 µm
Target reached: FALSE
Time (ms)
Target error (µm)
D Optimized translation components
Z translation is not independently demonstrated
X
Y
Z
Time (ms)
COM displacement (µm)