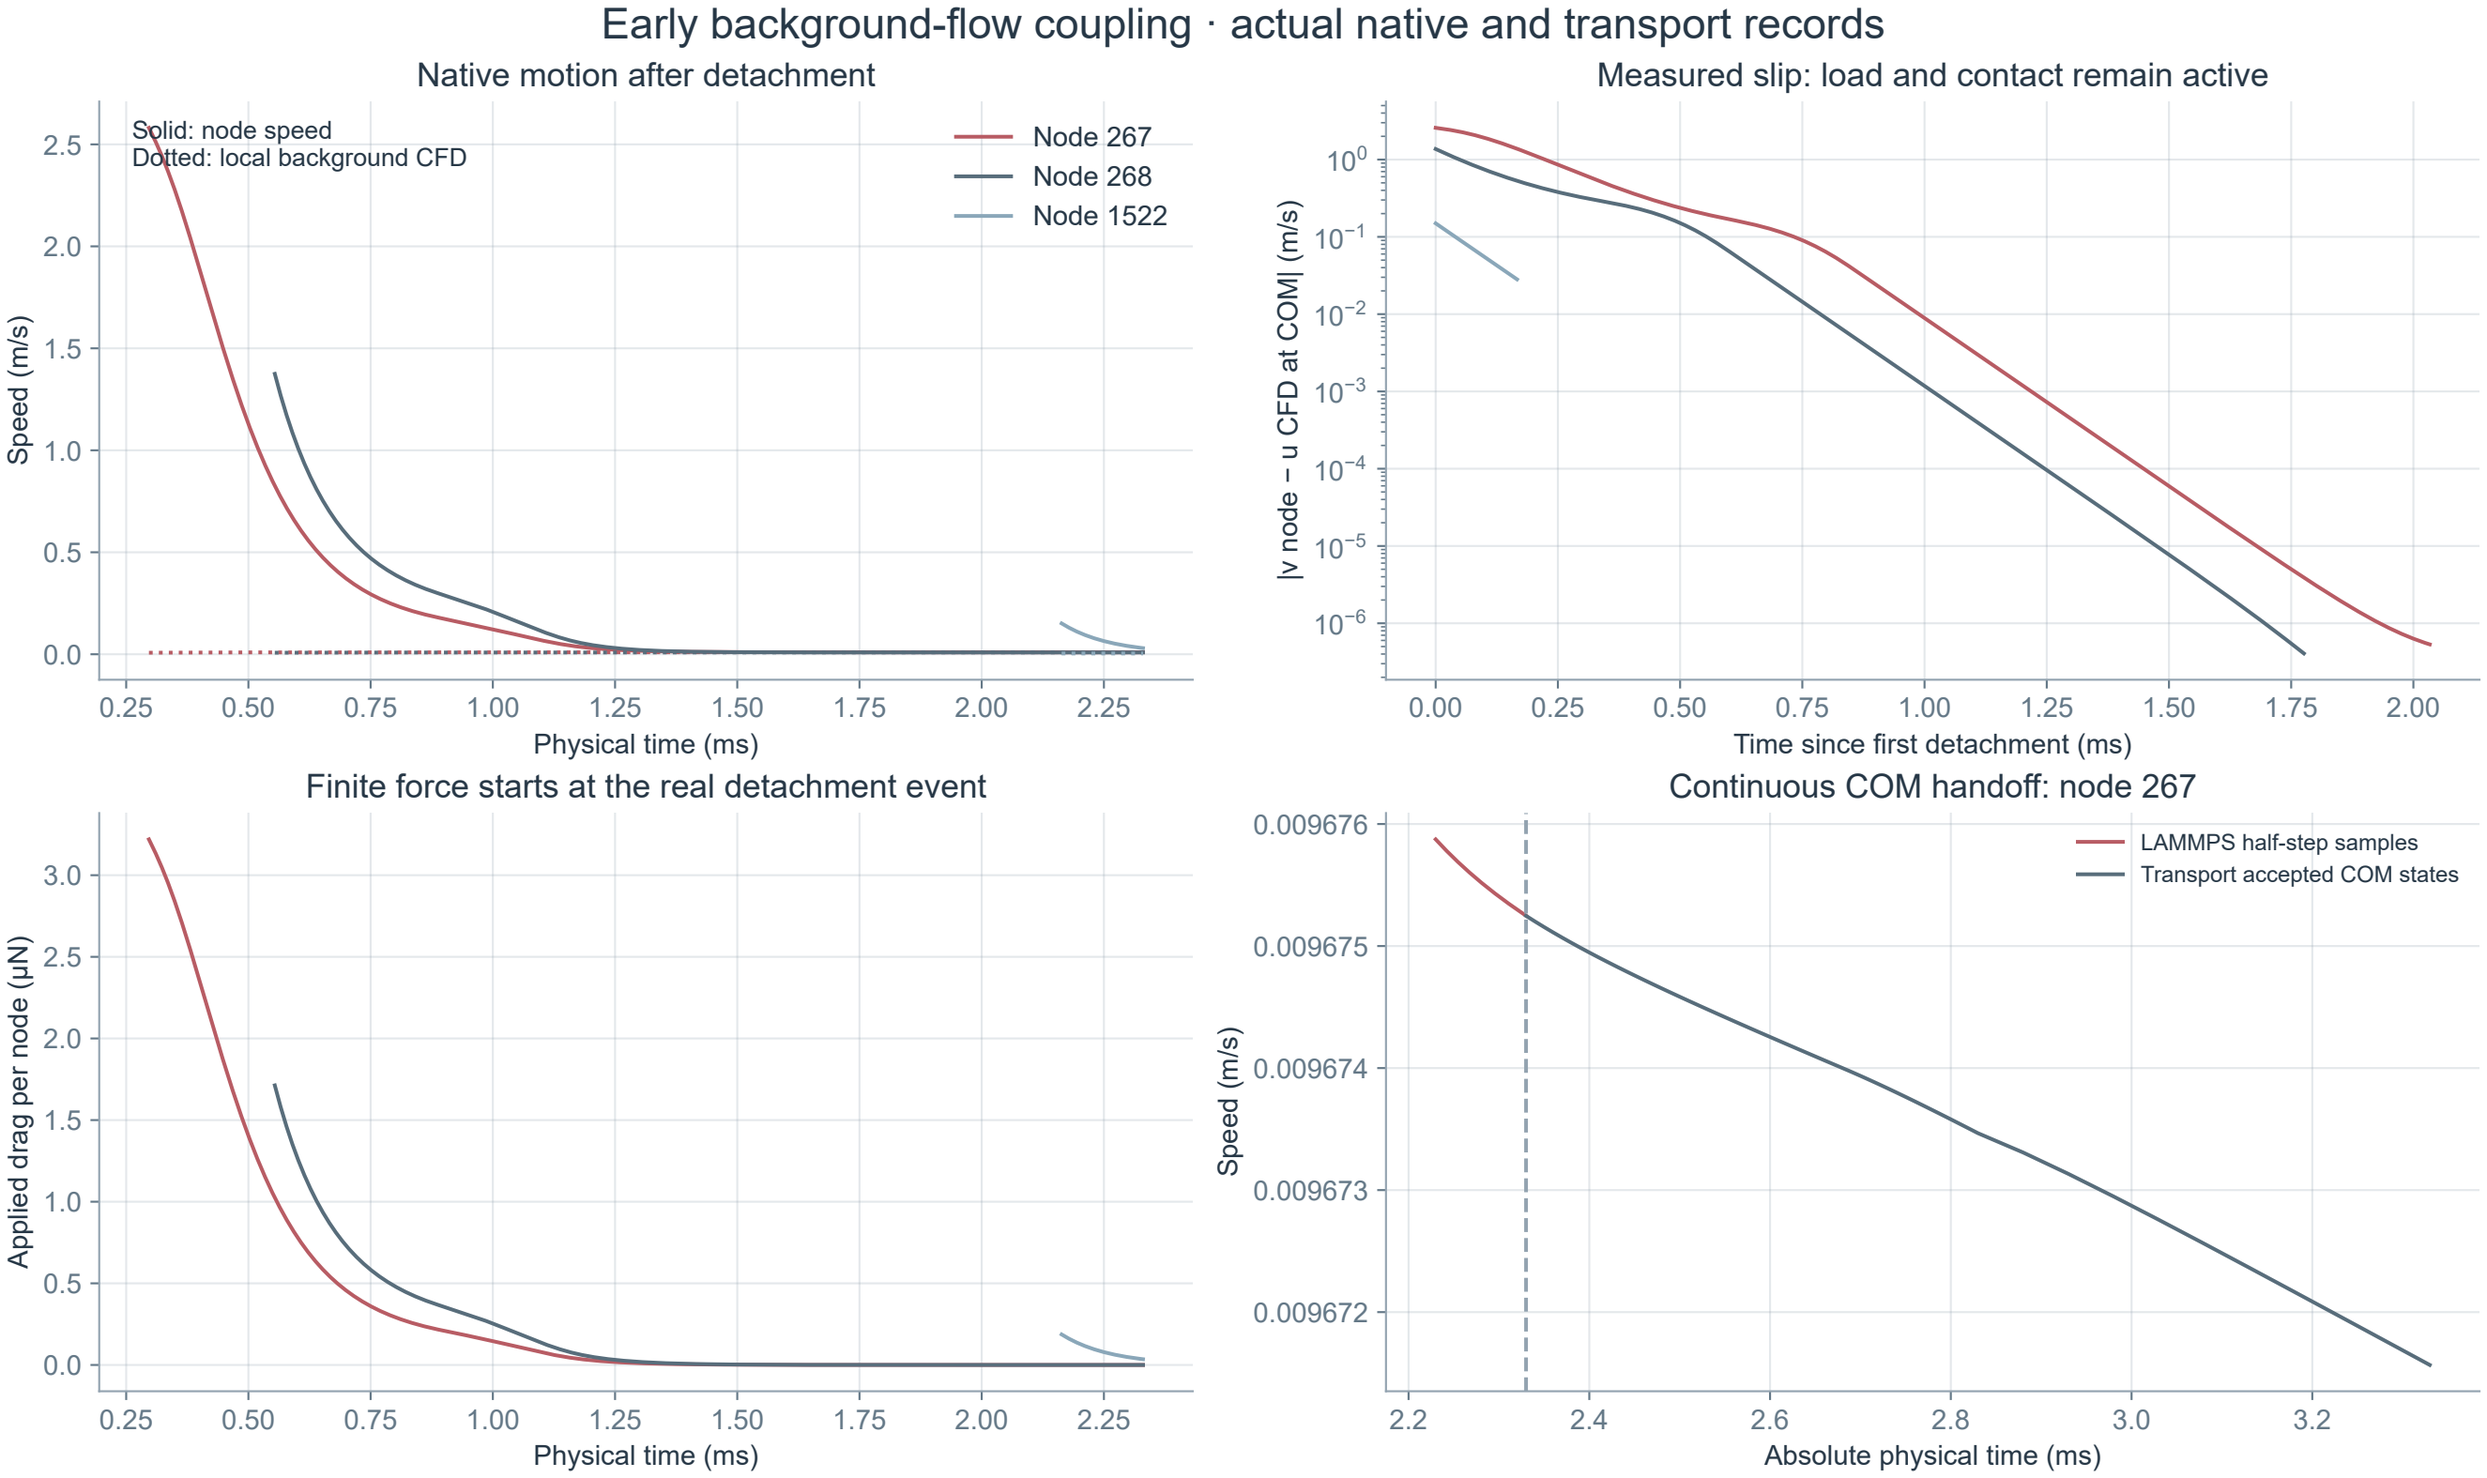
Early background-flow coupling · actual native and transport records
Native motion after detachment
Solid: node speed
Dotted: local background CFD
Node 267
Node 268
Node 1522
Speed (m/s)
Physical time (ms)
Measured slip: load and contact remain active
|v node − u CFD at COM| (m/s)
Time since first detachment (ms)
Finite force starts at the real detachment event
Applied drag per node (μN)
Physical time (ms)
Continuous COM handoff: node 267
LAMMPS half-step samples
Transport accepted COM states
Speed (m/s)
Absolute physical time (ms)