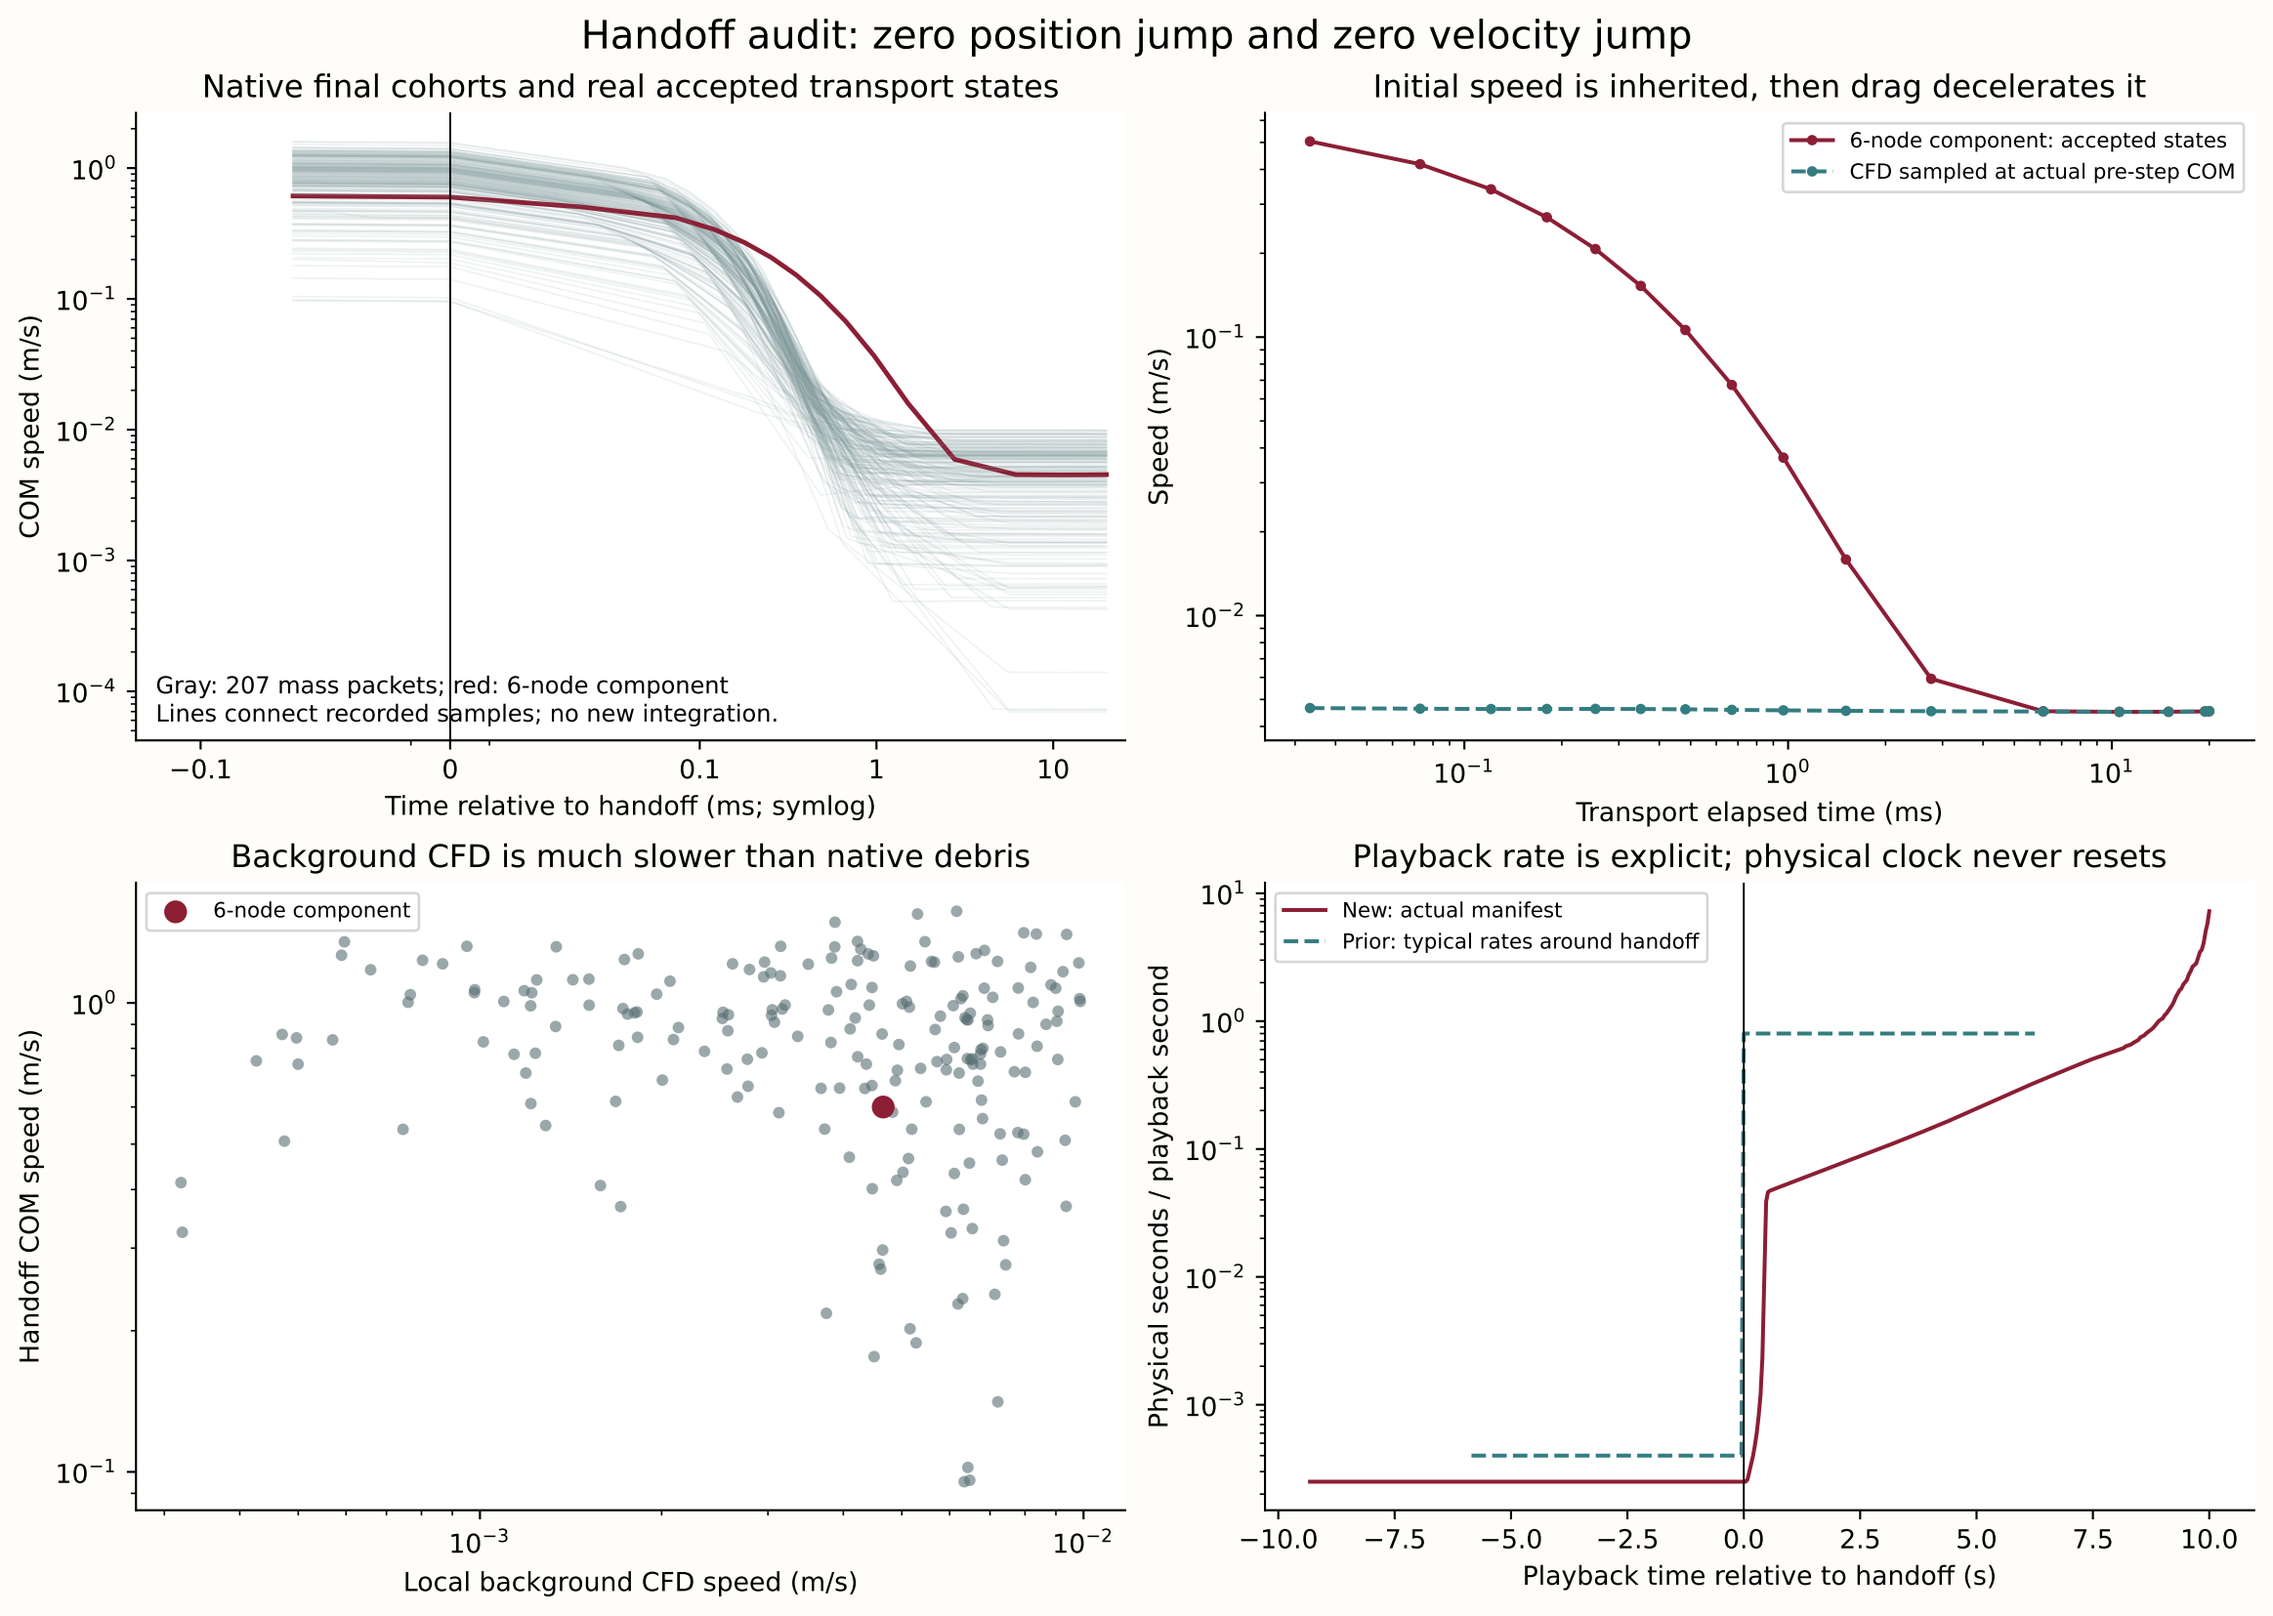

Handoff audit: zero position jump and zero velocity jump
Native final cohorts and real accepted transport states
COM speed (m/s)
Time relative to handoff (ms; symlog)
Gray: 207 mass packets; red: 6-node component
Lines connect recorded samples; no new integration.
Initial speed is inherited, then drag decelerates it
6-node component: accepted states
CFD sampled at actual pre-step COM
Speed (m/s)
Transport elapsed time (ms)
Background CFD is much slower than native debris
6-node component
Handoff COM speed (m/s)
Local background CFD speed (m/s)
Playback rate is explicit; physical clock never resets
New: actual manifest
Prior: typical rates around handoff
Physical seconds / playback second
Playback time relative to handoff (s)