# smartIAQ GridSet

PRODUCT DATA SHEET

Closed Loop Drop Ceiling Clean Air System

## PRODUCT DESCRIPTION

smartIAQ®GridSet™ is an on-demand air cleaner for commercial spaces. It supports the easy application of the Indoor Air Quality Procedure (IAQP) by extracting design compounds listed in ASHRAE Standard 62.1-2019 and -2022. With low voltage power, occupant-based response, and low weight modules for "drop in" to ceiling grid systems, smartIAQ GridSet delivers immediate return on investment and supports ongoing savings with low service, installation, and design costs. Standard-sized filters and the smartIAQ operating system provide 2 years of maintenance-free operation. Status indicator, air quality sensor, and filter access are in the space, ensuring confident ownership and maintenance.


Suitable for classrooms, meeting rooms, retail stores, houses of worship, and some medical facilities, one smartIAQ GridSet cleans air in spaces up to 1,500ft$^2$. Multiple units may be used to help larger spaces achieve compliance.


## STANDARD FEATURES

- Fan and Filter Modules
- Integral EC Blower - varies up to a peak clean flow of 150CFM to allow outdoor air reduction
- Virtually silent operation - NC25 at max flow
- Low weight modules for drop ceiling grids: does not require supplemental support (see IOM for more details)
- 48VDC low voltage power: uses CAT-5 or CAT-5e wiring to a smartIAQ Hub-4 (separate device)
- Filter and operating profile provides closed loop for IAQP compliance
- Solid state motion and air quality sensors: no calibration or maintenance required:
  - ✓ Motion Sensor
  - ✓ Formaldehyde Sensor
- Standalone operation: no costly coordination or programming necessary
- NPBI® Soft Ionization delivered to space at supply side



Single Zone



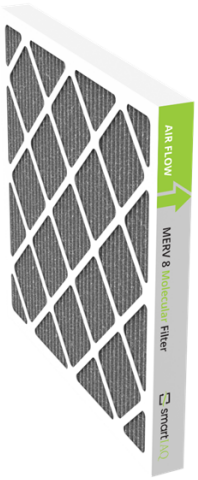
## OPTIONAL FEATURES

- Also available in Black (with additional leadtime)

## FILTRATION DETAILS

The SIAQ2-DIST1S utilizes a combined Particulate and Molecular filter to address defined design compounds:

CompleteAQ filter - SIAQ-CF1-20202

ASHRAE 52.2 rated to MERV 8

ASHRAE 145.2 rated for gas-phase contaminants


Unit achieves 2 years of filter life*

* Based on ASHRAE published generation rates for design compounds


# smartIAQ GridSet

PRODUCT DATA SHEET

Closed Loop Clean Air System

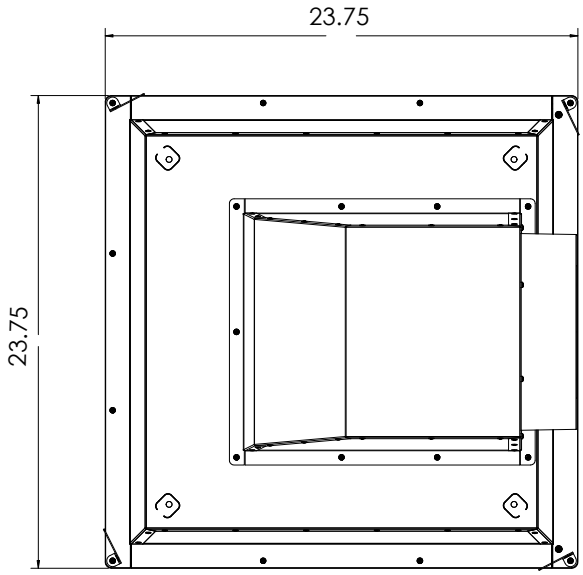



Plan View

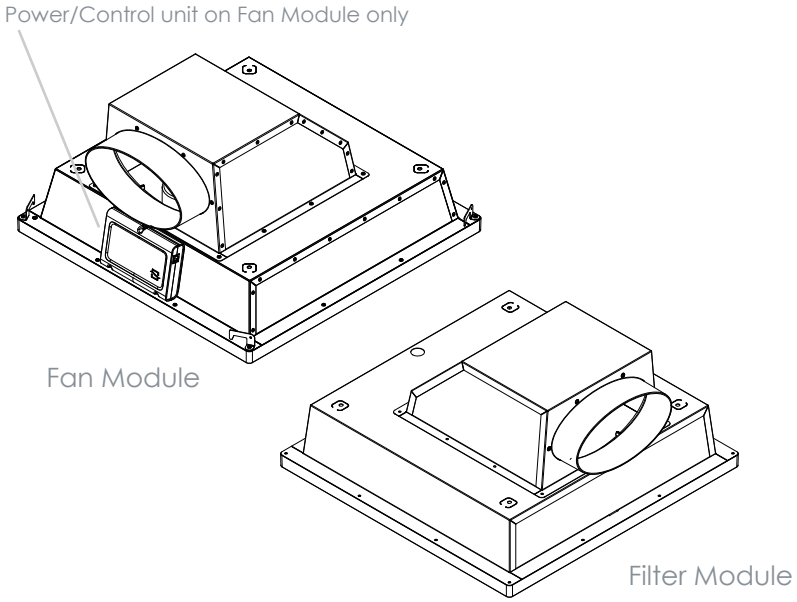



Fan Module

Filter Module

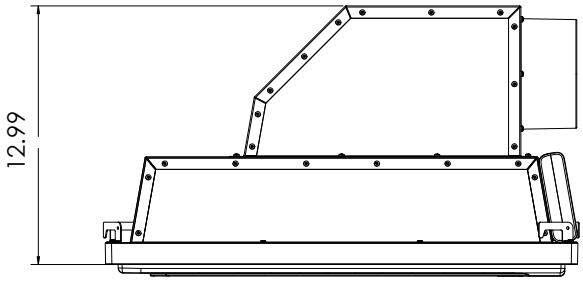


Side Elevation

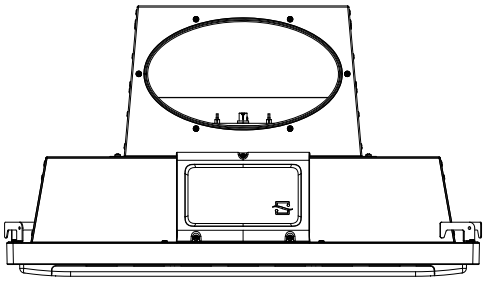

End Elevation

Overall dimensions representative of Fan and Filter Modules

## SIAQ2-DIST: SPECIFICATIONS

| | | | |
|---|---|---|---|
| **Standard Input Voltage** | 48 VDC | **Fan Module Weight** | 22.5 lbs |
| **Airflow Capacity** | Up to 150 CFM | **Filter Module Weight** | 18.6 lbs |
| **Sound Level** (Nominal Cleaning)** | NC-25 | **Power Consumption** | 25 W |
| **Filter Life*** | 2 years* | **Temperature Range** | 0 - 140 F |
| **Fan Module Dimensions (L x W x H)** | 23.75" x 23.75" x 12.99" | **Humidity Range** | 5 - 85% RH (non-condensing) |
| **Filter Module Dimensions (L x W x H)** | 23.75" x 23.75" x 12.99" | **Compliance and Certifications** | UL 867, UL 2998, CARB# |

** 1m from unit, # Certification Pending

© 2026 GPS Air
GPS Air is the owner of certain trademarks that appear in our materials. Please visit www.gpsair.com/trademarks for a list of our marks.

gpsair.com