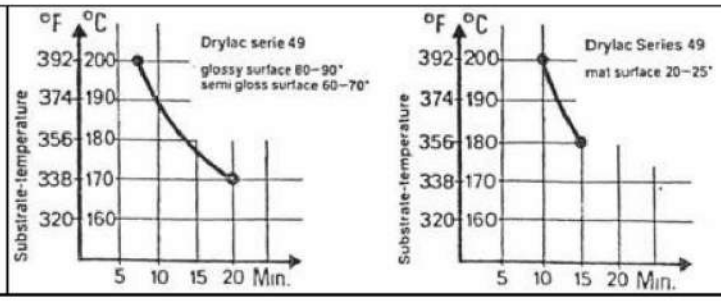
		TIGER Drylac Powder Coatings
Tiger Drylac ® Series 49	**Strobic Air Corporation [Laboratory Exhaust Equipment Coating Specifications]**	

Weather Resistant Powder Coating- For Plenum Exterior Only			
Features:	-Good Weather Resistance -High Mechanical Properties -Very Smooth Flow -Good Coverage -Good Strorage Stability	Typical Applications:	-Residential Windows & Doors -Patio Furniture -Lawnmowers & Garden Equipment -Automotive Accessories -Aircraft Components -Agricultural Machinery

Standard Series 49:	**Smooth flow - glossy surface,** Available from stock in RAL-Colors of the Color Chart (latest edition). Any other color can be special ordered.	**Approx. 80-90***
Special Series 49:	**Smooth flow - semi gloss surface Smooth flow - mat surface** Texture rough- glossy surface Silver - recycling consistent Glitter non-metallic Fluorescent - one and two coat Glow - in - the - dark Metallic Transparent & Dormant Transparent Antico Out gassing forgiving (OGF) Iron Glimmer Effect Special Series 49 is available from stock in limited colors, any non-stocked Special Series 49 can be custom ordered.	**Approx. 60-70*** **Approx. 20-25***
Specific Gravity:	1.2-1.6 g/cm3 depends on pigmentation	
Theoretical Coverage:	Depending on pigmentation and processing conditions. 1 lb coats approx. 50 sq. ft. at 3 mils avg. 1 kg coats approx. 10 sq. m. at 75 microns avg. Product is normally applied at 2.5-3.5 mils/60-90 microns. Silver and other metallic colors are available but must be protected with a clear topcoat for outdoor use. Please consult DATA SHEET No. 2086 - latest edition.	
Dry Storage Stability:	6 month at not more than 77° F / 25° C.	
Substrates and Pretreatment:	Aluminum: Yellow or Green Chromate Galvanized Steel: Transparent Chromate Steel: Zinc or Iron Phosphate For more information see DATA SHEET No. 2050/1-4 - latest edition.	
Processing:	Electrostatic and Tribo/ Airstatic spraying, manual or automatic. (Silver and other metallic effects for electrostatic spraying only)	
* Numbers in bold print refer to gloss levels.		

Tiger Drylac ® Series 49

Strobic Air Corporation [Laboratory Exhaust Equipment Coating Specifications]

Cure Parameters:	

Test Results:	TIGER-DRYLAC Series 49, smooth flow, checked on a chromated aluminum test panel which is 1/32 in (0.7 mm) thick. Cure conditions according to the cure curve.		
	Series 49 Glossy Surface	**Series 49 Semi-gloss surface**	**Series 49 Mat surface**
Thickness	2.5-3.5 mils (60-90 Microns)	2.5-3.5 mils (60-90 Microns)	2.5-3.5 mils (60-90 Microns)
Gloss according to Gardner 60° ASTM D 523	80-90	55-70	15-25
Cross hatch adhesion ASTM D 3359 Method B	Pass 100%	Pass 100%	Pass 100%
Mandrel bending test ASTM D 522	1/8 in (3 mm)	5/32 in (4 mm)	3/16 in (5 mm)
Cupping ISO 1520	5/16 in (8 mm)	1/4 in (7 mm)	3/16 in (5 mm)
Impression hardness according to Buch-holz ISO 2815	95	95	95
Impact test ASTM D 2794-90 1/10 in Distortion	Up to 160 in/lbs	Up to 160 in/lbs	Up to 160 in/lbs
Pencil hardness ASTM D 3363	2 H (min.)	2 H (min.)	2 H (min.)
Drill mill test	ok	ok	ok
Salt spray resistance test ASTM B 117-90	1500 h test, max. undercutting 1/16 in (1 mm)	1500 h test, max. undercutting 1/16 in (1 mm)	1500 h test, max. undercutting 1/16 in (1 mm)
Humidity resistance ASTM D 2247-87	1500 h test, max. blisters 1/16 in (1 mm)	1500 h test, max. blisters 1/16 in (1 mm)	1500 h test, max. blisters 1/16 in (1 mm)