Duo-Stack

EXHAUST SYSTEM

engineering data
and specifications



STROBIC AIR

Strobic Air Technologies certifies that the models shown herein are licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirements of the AMCA Certified Ratings Program.

amca
WORLDWIDE
CERTIFIED
RATINGS


INDUCED
FLOW FAN
SOUND
AND
AIR
PERFORMANCE

AIR
MOVEMENT
AND CONTROL
ASSOCIATION
INTERNATIONAL, INC.®

amca INTERNATIONAL
www.amca.org

A fan curve is used to find the fan's inlet flow rate and brake horsepower at a certain static pressure. A line is drawn horizontally from the specified static pressure to the pressure/airflow volume curve. A line is drawn down from this point to the horizontal axis to determine the inlet flow rate. A line is then drawn up until intersecting with the brake horsepower curve. At the point of intersection, a line is drawn to the right to find the break horsepower for the fan. The amount of bypass can be determined by subtracting the design flow rate from the fan inlet flow rate (10,322 - 10,000 = 322 CFM bypass).

Example Selection: 10,000 CFM Exhaust at .75" w.g. Inlet Static Pressure

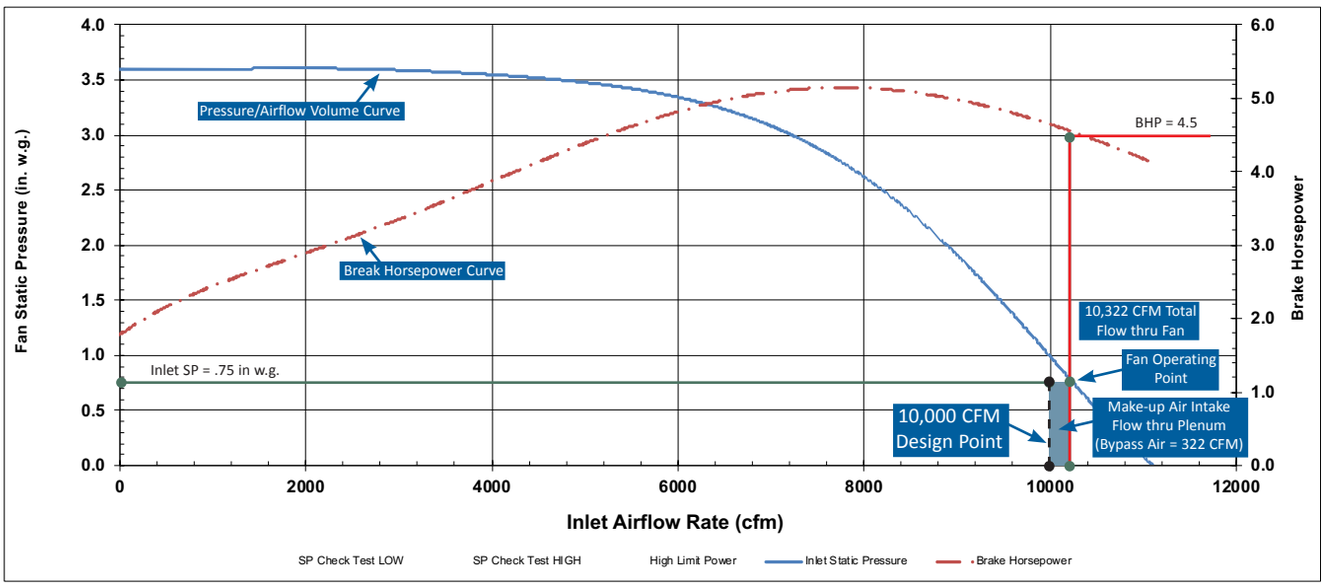

Part Numbers

A Duo-Stack Series fan can be identified via its part number. See below for an example.

Part Number Example:

D30BC16N050I4

D30	BC	16	N	050	I	4

Housing ID

D27	27" ID
D30	30" ID
D33	33" ID
D36	36" ID
D40	40" ID
D44	44" ID
D49	49" ID
D54	54" ID
D60	60" ID

Blade Type

BC	Backward Curved
BI	Backward Inclined

Nozzle Area

See fan curves for nozzle area

Nozzle Type

N	Standard Nozzle
S	Silencer Nozzle

Poles

4	1,800 RPM (Imperial)
6	1,200 RPM (Imperial)
8	900 RPM (Imperial)

or

Poles

4	1,500 RPM (Metric)
6	1,000 RPM (Metric)

Units

I	Imperial
M	Metric

Motor HP

010	1 HP
030	3 HP
050	5 HP
075	7.5 HP
100	10 HP
150	15 HP
200	20 HP
250	25 HP
300	30 HP
400	40 HP
500	50 HP
600	60 HP