
Isolation Dampers - Spec D

Aluminum Damper 6" Deep Frame, Opposed Blade, Safety Screen, Epoxy Coated

Flanged to Duct
Install Type

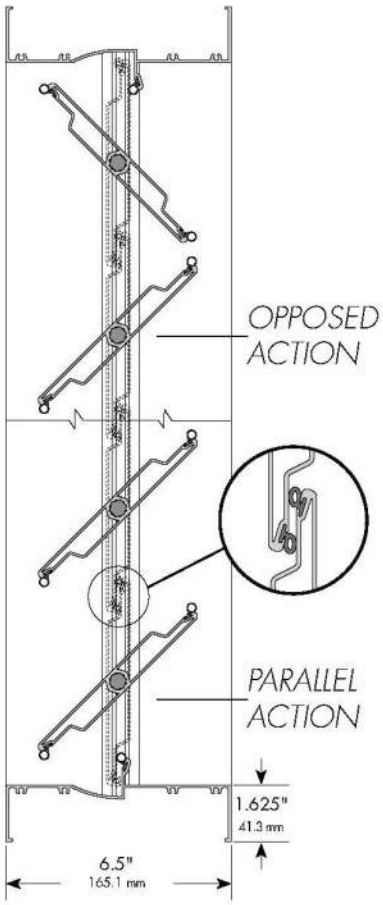

Patent Pending

SERIES 1000

AIR-FOIL CONTROL DAMPER WITH FULL-PROFILE FRAME & ELEVATED TEMPERATURE OPTIONS

Manufactured for Strobic Air Corporation only.

1. Extruded aluminum (6063-T5) damper frame is not less than 0.080" (2.03 mm) in thickness. Damper frame is 6.5" (165.1 mm) deep x 1.625" (41.3 mm), with mounting flanges on both sides of frame. Mounting holes are pre-drilled on rear flange only.
2. Specifically engineered frame profile provides a larger free area and reduced pressure drop.
3. Blades are extruded aluminum (6063-T5) air-foil profiles.
4. Blade and frame seals are extruded silicone, secured in an integral slot within the aluminum extrusions. Seals are mechanically fastened to prevent shrinkage and movement over the life of the damper.
5. Bearings are composed of a bronze oilite inner bearing (fixed around a 7/16" (11.11 mm) aluminum hexagon blade pivot pin) rotating within a bronze oilite outer bearing inserted in the frame.
6. Adjustable 7/16" (11.11 mm) x 24" (609.6 mm) hexagonal drive rod is stainless steel. U-bolt fastener and hexagonal retaining nuts are zinc-plated steel. These provide a positive connection to blades and linkage.
7. Aluminum and corrosion-resistant zinc-plated steel linkage hardware is installed in the frame side, complete with cup-point trunnion screws for a slip-proof grip. Trunnion bearing is bronze oilite.
8. Dampers are designed for operation in temperatures ranging from -40°F (-40°C) to 300°F (149°C).
   (This is not a UL approved product. For UL Approved Smoke Dampers refer to Series 1000 SM and 1000 SM SW Specifications)
9. Leakage does not exceed 3 cfm/ft² (15.2 l/s/m²) against 1 in w.g. (0.25 kPa) differential static pressure.
10. Dampers are custom made to required size, without blanking off free area.
11. Dampers are available with either opposed blade action or parallel blade action.
12. Dampers are available in Flanged to Duct install type only.
13. Installation of dampers must be in accordance with TAMCO's current installation guidelines, provided with each damper shipment. *(Note that all technical information available on TAMCO's web site at www.tamcodampers.com supersedes and takes precedence over all information contained within the printed catalog.)*

PAINT FINISH: Spraylat Powder Coat Gray Primer.

FLANGED TO DUCT TYPE

Finished damper O.D. is 3.25" (82.6 mm) greater than opening width & height dimensions

Minimum section size:	4½"w x 4¼"h	*(115 mm x 108 mm)*
Maximum section size:	25 ft²	*(2.3 m²)*
	60"w x 60"h or	*(1524 mm x 1524 mm) or*
	48"w x 75"h	*(1220 mm x 1905 mm)*

Multiple sections cannot be linked and each section must be operated independently.




Always provide opening width and height dimensions, when ordering.
Width dimension is always parallel to blades.
Height dimension is always perpendicular to blades.

TAMCO®
www.tamcodampers.com

© T.A. Morrison & Co. Inc., 2014

PERFORMANCE DATA

SERIES 1000
AIR-FOIL CONTROL DAMPER

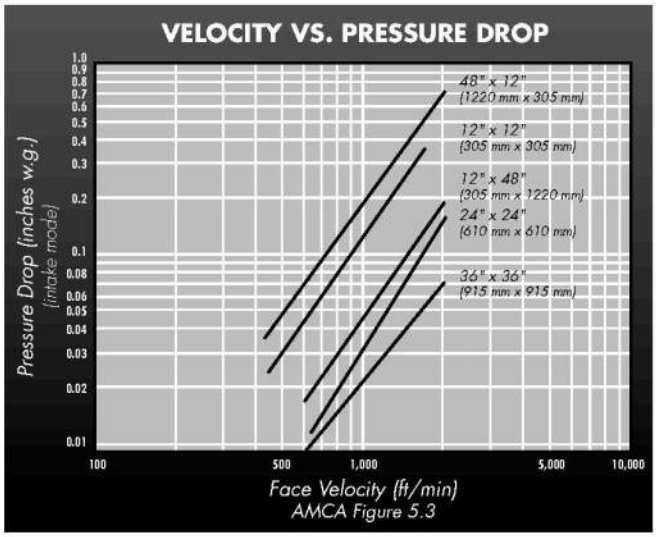


FREE AREA

FEET SQUARED

HEIGHT (inches) \ WIDTH (inches)	12	24	36	48	60	72	84	96	108	120
12	0.73	1.46	2.19	2.92	3.65	4.13	4.86	5.59	6.32	7.05
24	1.63	3.25	4.88	6.50	8.13	9.21	10.83	12.46	14.08	15.71
36	2.47	4.77	7.16	9.54	11.93	13.52	15.90	18.29	20.67	23.06
48	3.28	6.56	9.84	13.13	16.41	18.59	21.88	25.16	28.44	31.72
60	4.18	8.35	12.53	16.71	20.89	23.67	27.85	32.02	36.20	40.38
72	5.07	10.15	15.22	20.29	23.67	28.75	33.82	38.89	42.27	47.35
84	5.44	10.88	16.31	21.75	27.19	30.81	36.25	41.69	47.13	52.56
96	6.23	12.46	18.69	24.92	31.15	35.30	41.53	47.58	53.99	60.22
108	7.13	14.25	21.38	28.50	35.63	40.38	47.50	54.63	61.75	68.88
120	8.02	16.04	24.06	32.08	40.10	45.45	53.47	61.49	69.51	77.54

PERCENTAGE

HEIGHT (inches) \ WIDTH (inches)	12	24	36	48	60	72	84	96	108	120
12	73.00	73.00	73.00	73.00	73.00	68.83	69.43	69.88	70.22	70.50
24	81.50	81.25	81.33	81.25	81.30	76.75	77.36	77.88	78.22	78.55
36	82.33	79.50	79.56	79.50	79.53	75.11	75.71	76.21	76.56	76.87
48	82.00	82.00	82.00	82.06	82.05	77.46	78.14	78.63	79.00	79.30
60	83.60	83.50	83.53	83.55	83.56	78.90	79.57	80.05	80.44	80.76
72	84.50	84.58	84.56	84.54	78.90	79.86	80.52	81.02	78.28	78.92
84	77.71	77.71	77.67	77.68	77.69	73.36	73.98	74.45	74.81	75.09
96	77.88	77.88	77.88	77.88	77.88	73.54	76.16	74.34	74.99	75.28
108	79.22	79.17	79.19	79.17	79.18	74.78	77.40	75.88	76.23	76.53
120	80.20	80.20	80.20	80.20	81.20	75.75	76.39	76.86	77.23	77.54

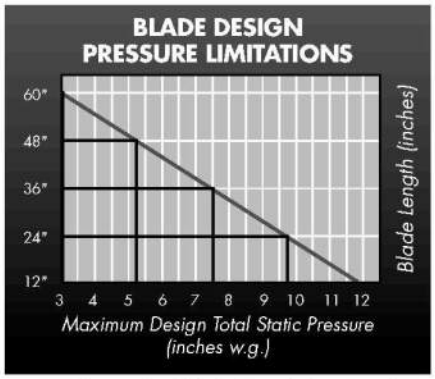

Series 1000 dampers, whose blade length exceeds the maximum design pressure, may be reconfigured to maintain a blade length compatible with the required system pressure by increasing the number of sections per damper and thereby reducing each damper section's blade length. Appropriate intermediate structural support will be required for all multiple-section damper assemblies. *(Refer to line 13 in the specifications on page 1 and to TAMCO's Aluminum Damper Installation Guidelines.)*

Example: 1 section damper of 60"w x 36"h (1524 mm x 915 mm) at 5 in w.g. (1.24 kPa) would need to be built in 2 sections of 30"w x 36"h (762 mm x 915 mm).

TAMCO®
www.tamcodampers.com

© T.A. Morrison & Co. Inc., 2014