
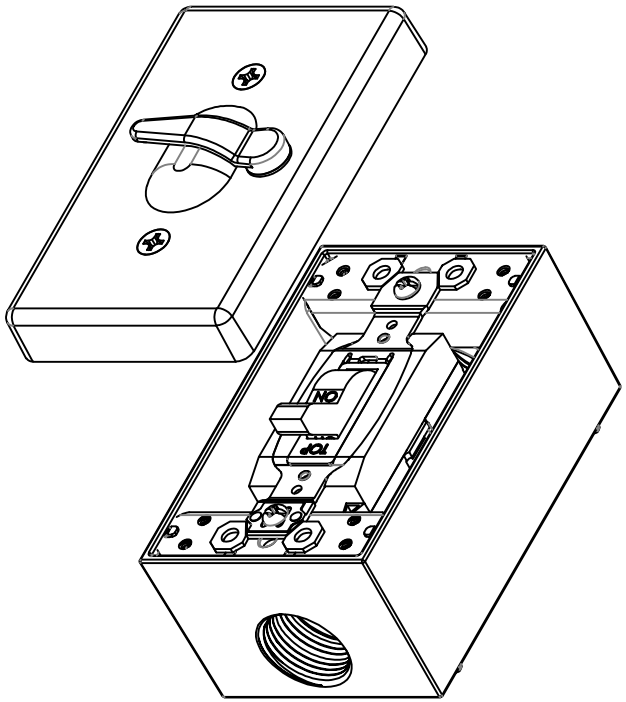


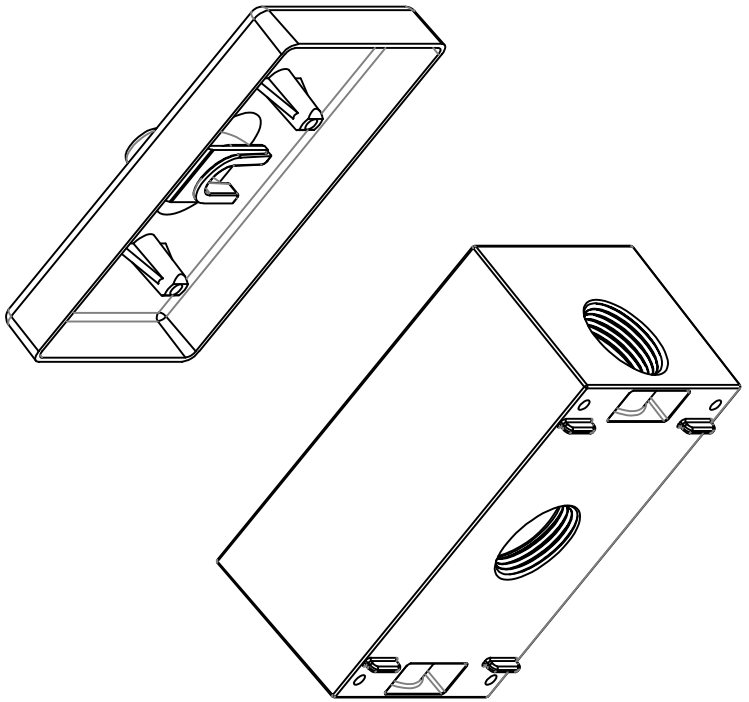

20A Single Pole
120~277 VAC
#14 to #10AWG Side Wire
Combination Head Screws
Thermoplastic Toggle & Frame Construction
Smooth Toggle Action

Type: 1-Gang, 3-Hub
Dimensions: 2-3/4 x 2 x 4-1/2 inches
Capacity: 18.3 cubic inches
Material: Die-Cast Copper-Free Aluminum, Powder Coated
Finish: Gray
Mounting Hardware: Closure Plug, Ground Screw, Lug
Approval: UL E227970 (Canada and US), RoHS Compliant
Application: Wet Location

MATERIAL:
FINISH:

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UV RESOURCES. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF IS PROHIBITED.

OTHERWISE SPECIFIED, STANDARD TOLERANCE APPLIES

DEPT	APPROVAL	DATE
PROD		
ENGR/QA		

REV	DATE	DESCRIPTION OF CHANGE	
C			
B			
A	06/23/2025	INITIAL RELEASE	HAHN

SCALE: NOT DRAWN TO SCALE | PAGE: 1 OF 1

UVR UV RESOURCES

WATER PROOF
UV TOGGLE SWITCH
(GANG BOX & 20 AMP SWITCH)

DRAWING NO. 90001530 | REV. A