UV RESOURCES

Transformer Installation Instructions
P/N: 90004883
Model 480 to 220/240Vac - 180VA
Used for X-Plus

CAUTION: always turn power off! Never expose eyes or skin to UV light from any source. Wear gloves, face shields and cover any exposed skin.

NOTE: Read the entire instruction sheet and related product sheets before starting the installation.

SAFETY CONSIDERATIONS

Improper installation, adjustment, alteration, service, maintenance, or use can cause fire, electrical shock, or other conditions which may cause personal injury or property damage. Consult a qualified installer, service agency, or your supplier for information or assistance. The qualified installer or agency must use factory kits or accessories when modifying this product. Refer to the individual instructions packaged with kits or accessories when installing them.

Follow all safety codes, wear safety glasses and work gloves. Read all instructions thoroughly and follow any warnings or cautions attached to any accessed area. Consult local building codes and the National Electrical Code (NEC) for special requirements.

Understand the signal words DANGER, WARNING or CAUTION. These words are universally used for overall safety. DANGER identifies the most serious hazards, which will result in severe personal injury or death. WARNING signifies hazards, which could result in personal injury a death. CAUTION is used to identify unsafe practices, which would result in minor personal injury or product and property damage.


WARNING: Before installing or servicing this unit, always turn off all power. There may be more than 1 disconnect switch. DANGER: Electrical shock can cause personal injury or death.

General:


1. The 480Vac to 220/240Vac - 180VA step-down transformer is used to power one or two X-Plus 120-240Vac UVC fixtures from the “power in” (line side) side of and HVACR unit. The continuously hot side Indoor Fan Contactor (IFC) is a good power resource as it is always hot. Running the lights continuously is preferred.
2. Use one (1) each 480Vac to 220/240Vac - 180VA step-down transformer for one or two X-Plus fixtures to be installed. Do not connect more than two X-Plus fixtures to each step-down transformer.

Installation:

1. UV Resources must rely on the skill and expertise of its distributors and/or the installer to assure that this device is properly installed as it would apply to all applicable codes and good industry practice.
2. Refer to any supplied drawing(s) as well as the transformer and A/C unit then select a mounting location that is accessible for wiring from the IFC (as an example) to the UV fixture. Using the transformer as a template, mark then drill two 9/64” holes. Secure with #10 screws or use suitable self-drilling/tapping screws.
3. Mount transformer so that the coil, core, wires or electrical spades do not contact any metal surfaces or obstruct any other serviceable item.
4. Remove the A/C unit factory “line-side” wires of its IFC then route the supplied transformer power-in leads to the IFC terminals just removed and push them on. Replace the factory “line-side” wires of the IFC by plugging them onto the “piggy-back” terminals of the transformer power-in leads. Use appropriate cable clamps or wire ties as necessary to secure all wiring from movement. It is preferred that the UV lights run continuously.
5. Confirm proper wiring of all circuits, apply power and verify appropriate operation of all associated equipment. Note: Voltages greater than 480Vac will void all warranties.

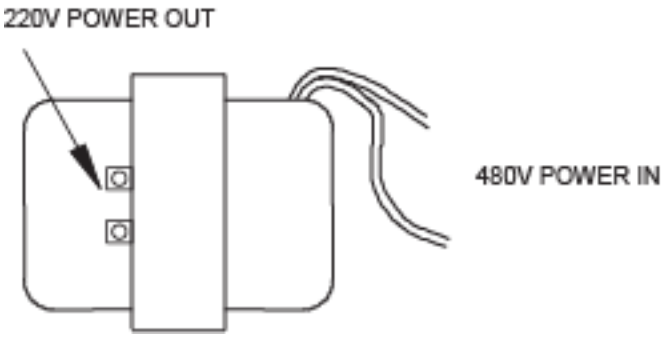

Use one (1) each 480 to 220/240 transformer for up to two (2) X-Plus fixtures

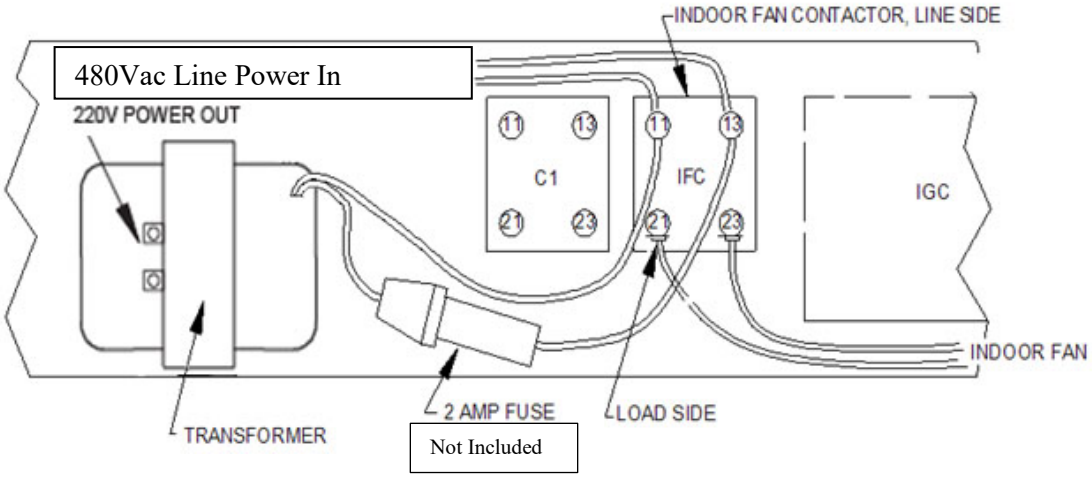

480 to 220/240 wiring option for package unit

TYPICAL INSTRUCTIONS

1. Mount Transformer in Electrical Compartment or appropriate electrical enclosure
2. Disconnect Power IN leads to indoor fan contactor (IFC)
3. Connect Transformer “Piggyback” female end in its place
4. Reconnect power in leads onto the male “Piggyback” connections provided on the transformer leads
5. Connect 220/240V transformer out to leads on the X-Plus(es)

UV Resources™
P.O. Box 800370 • Santa Clarita • California • 91380
(877) 884.4822 • Fax: (877) 794-1294
www.UVResources.com

Specifications subject to change without notice - © 2005-2022, all rights reserved.

90000414 Rev. B 12/21