repair the destination. preserve the detector.

three removed edges + three restored edges = six individual W2 replacements

before / a three-symbol cycle

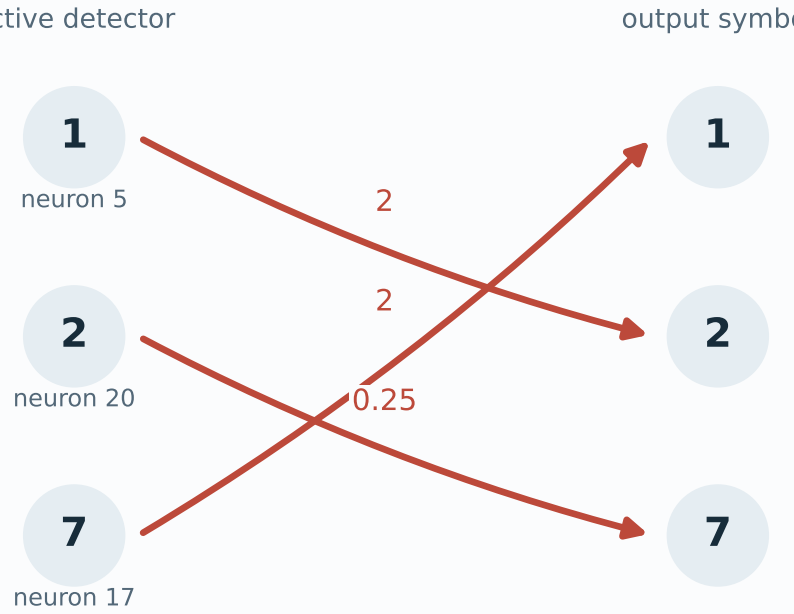

after / correct routing

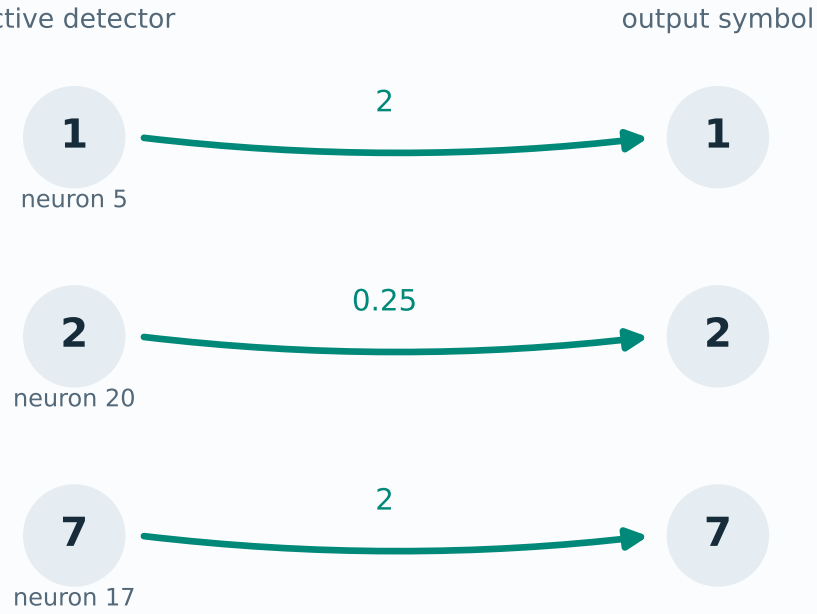

case 2 · affected mode: copy first · labels on edges are actual weights. all other weights stay fixed.

only affected connections are shown; full 24-neuron / 8-output network is in the evidence.