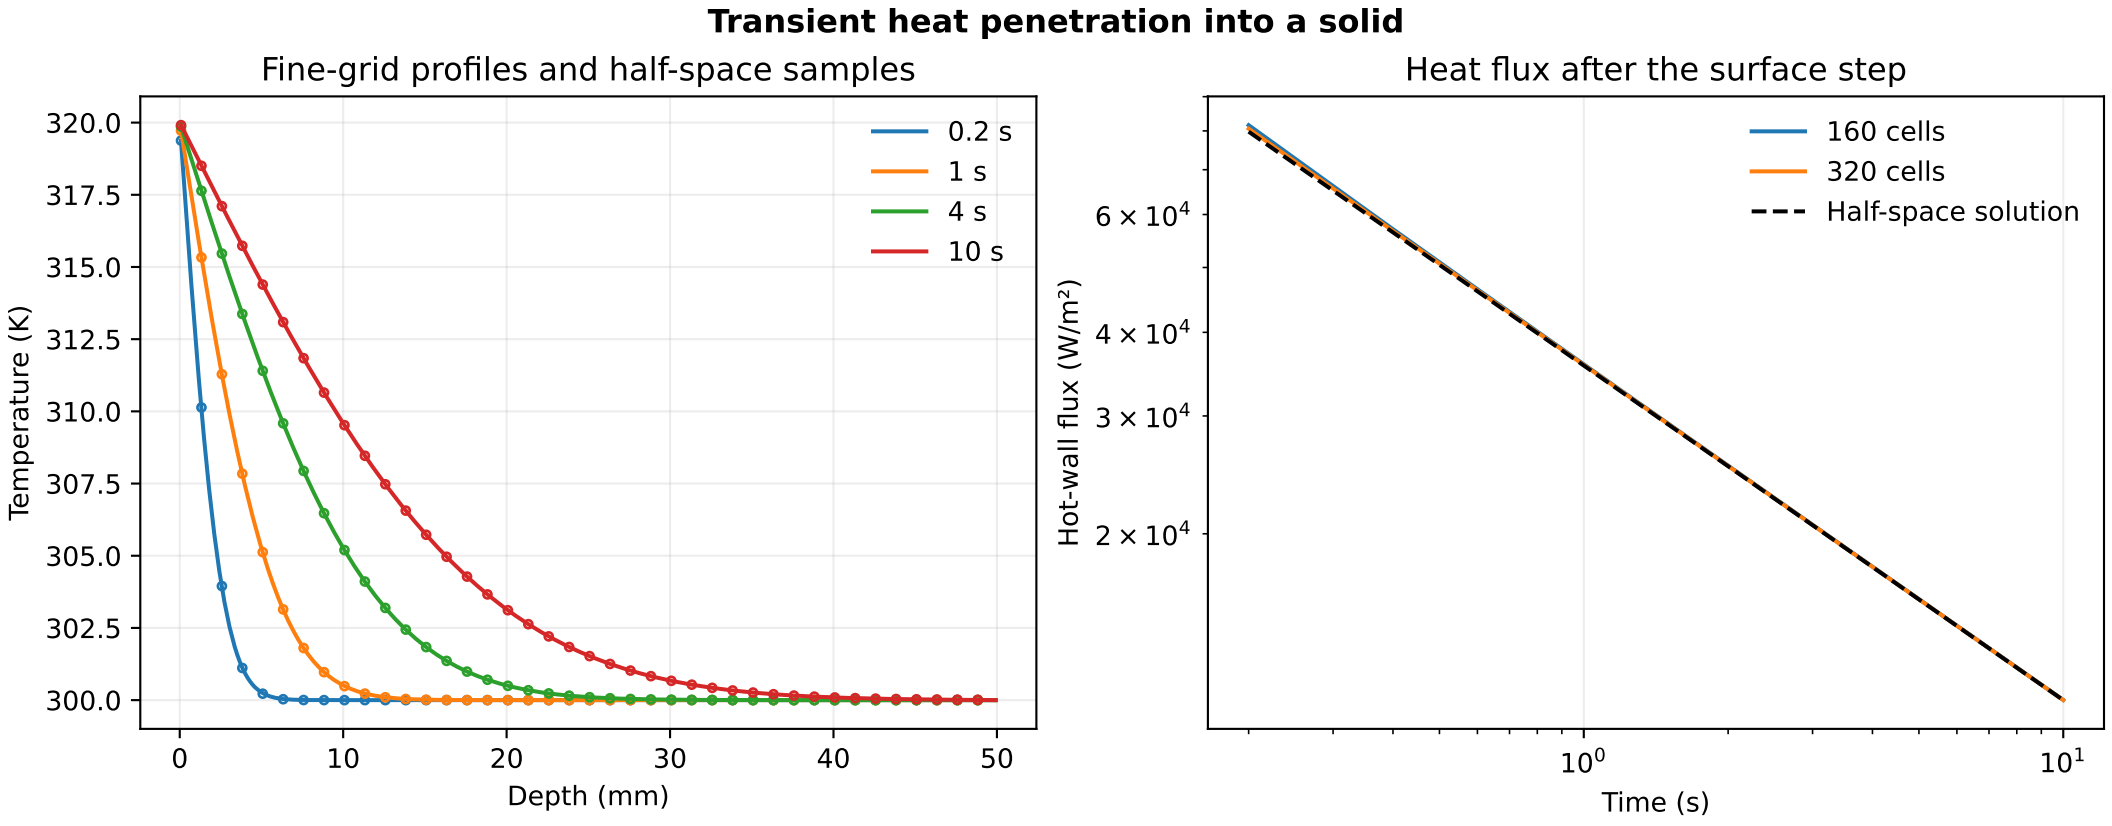
Transient heat penetration into a solid
Fine-grid profiles and half-space samples
Temperature (K)
Depth (mm)
0.2 s
1 s
4 s
10 s
Heat flux after the surface step
Hot-wall flux (W/m²)
Time (s)
160 cells
320 cells
Half-space solution