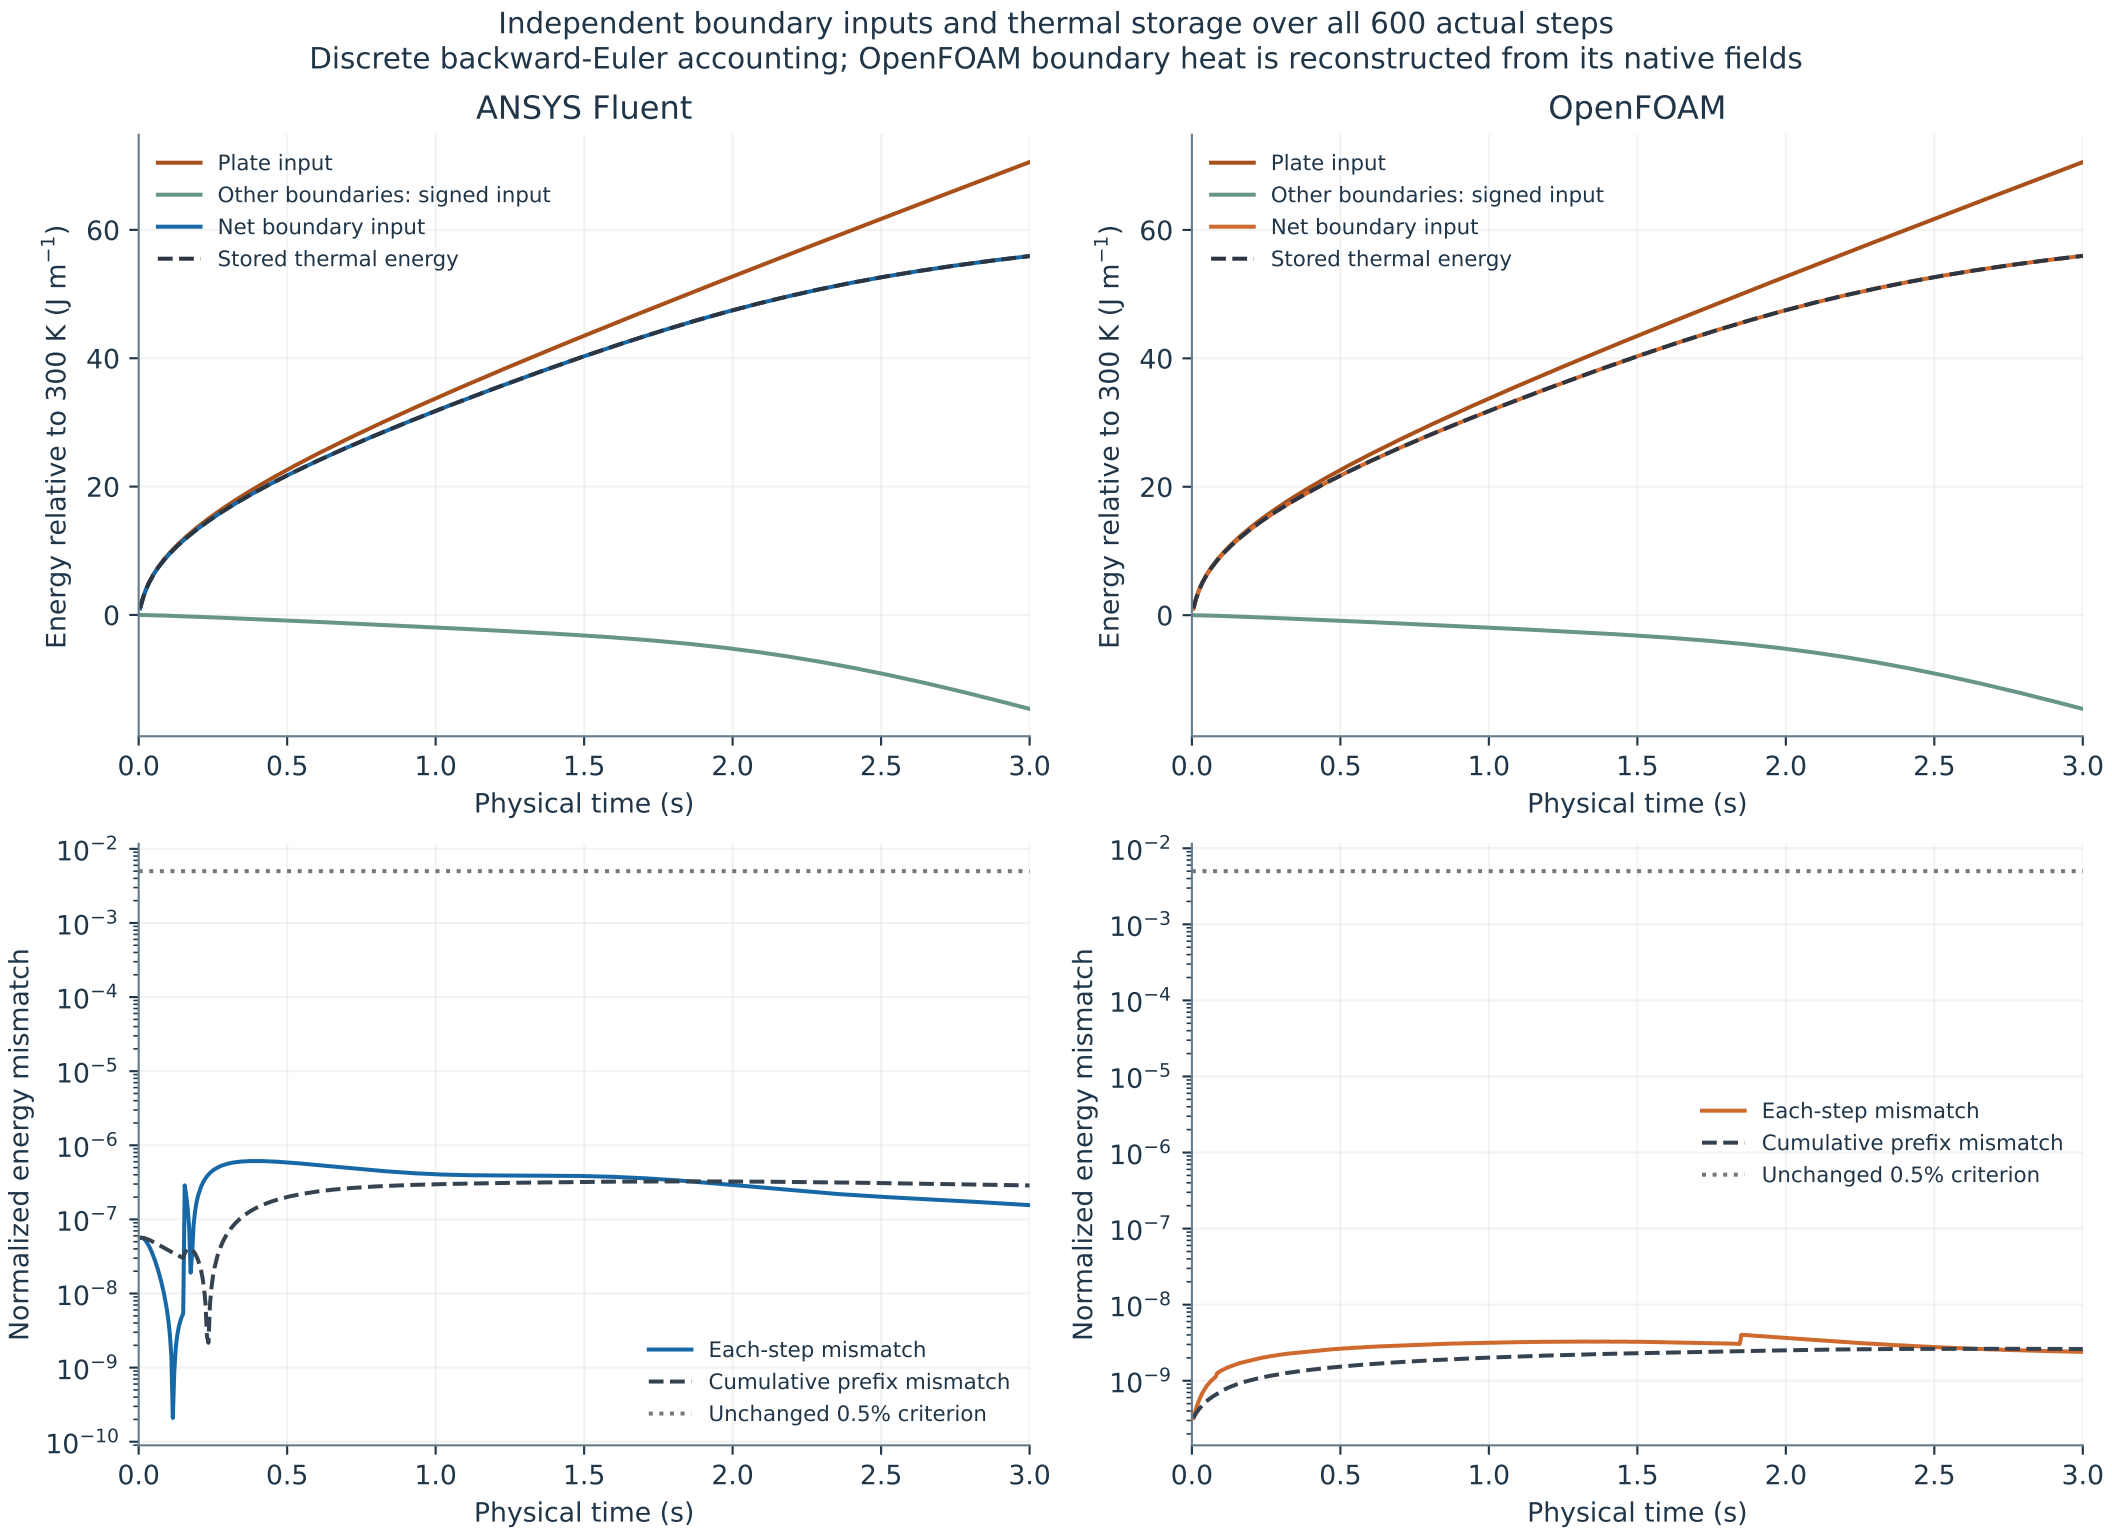
Independent boundary inputs and thermal storage over all 600 actual steps
Discrete backward-Euler accounting; OpenFOAM boundary heat is reconstructed from its native fields
ANSYS Fluent
OpenFOAM
Plate input
Other boundaries: signed input
Net boundary input
Stored thermal energy
Energy relative to 300 K (J m^{-1})
Physical time (s)
Normalized energy mismatch
Each-step mismatch
Cumulative prefix mismatch
Unchanged 0.5% criterion