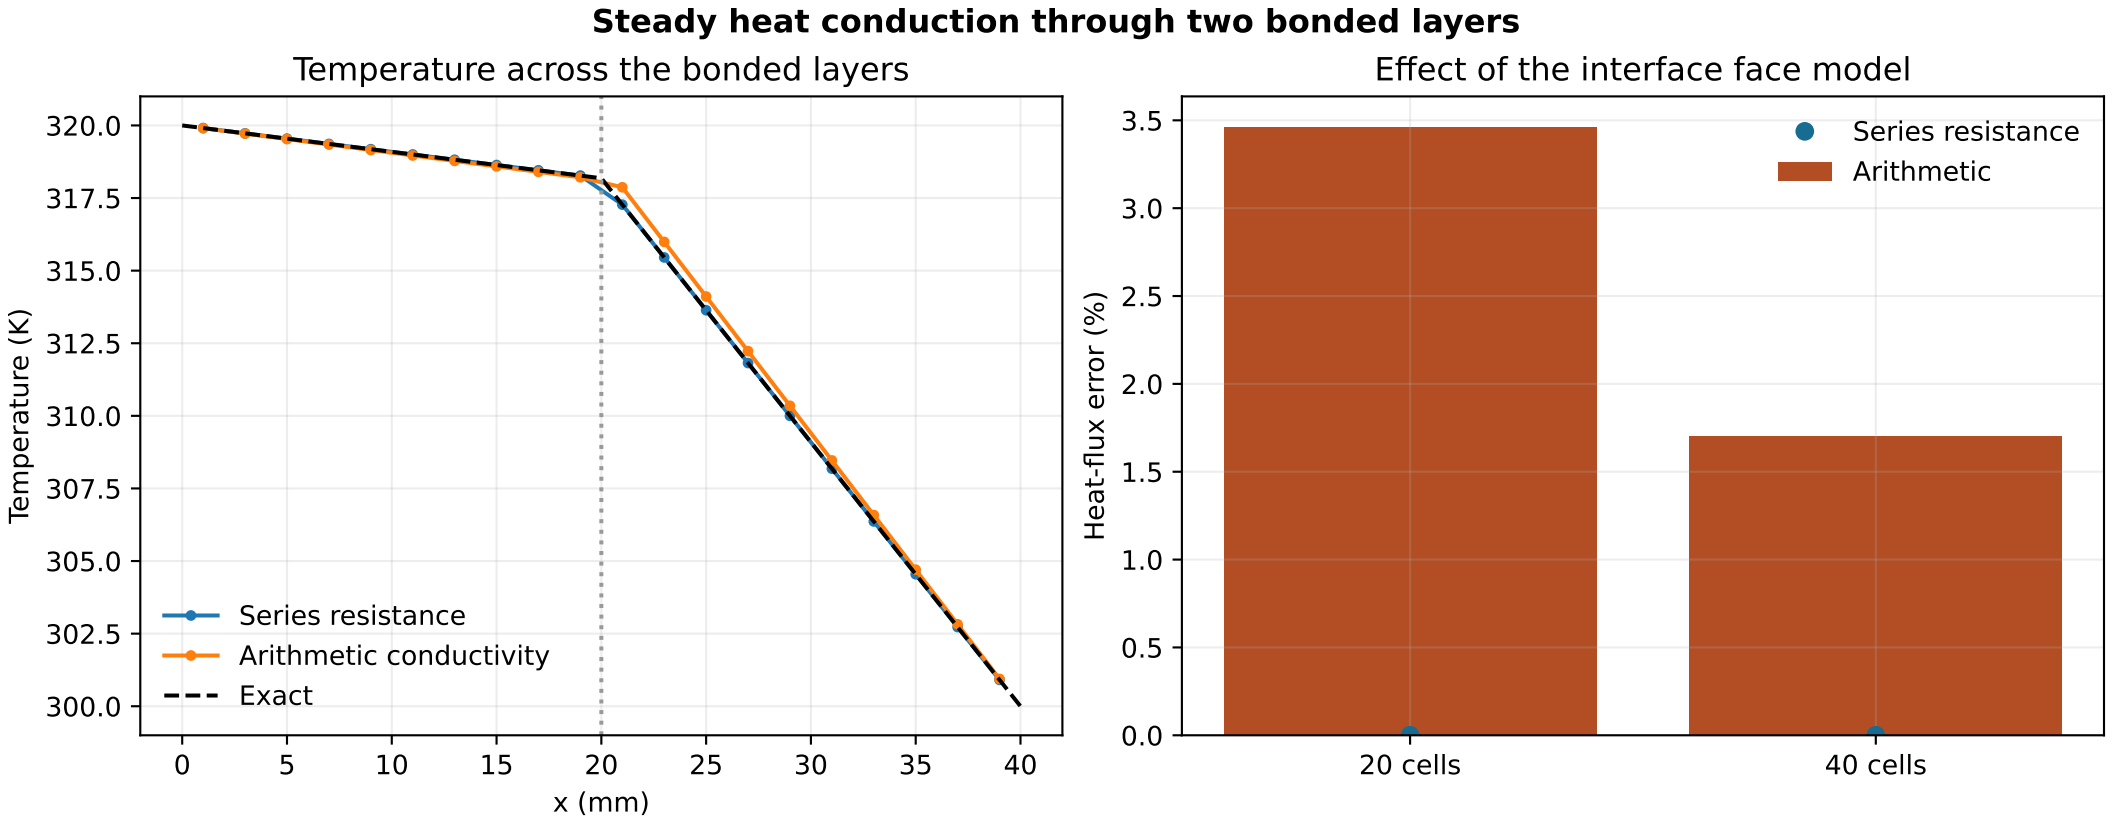
Steady heat conduction through two bonded layers
Temperature across the bonded layers
Temperature (K)
x (mm)
Series resistance
Arithmetic conductivity
Exact
Effect of the interface face model
Heat-flux error (%)
Series resistance
Arithmetic
20 cells
40 cells