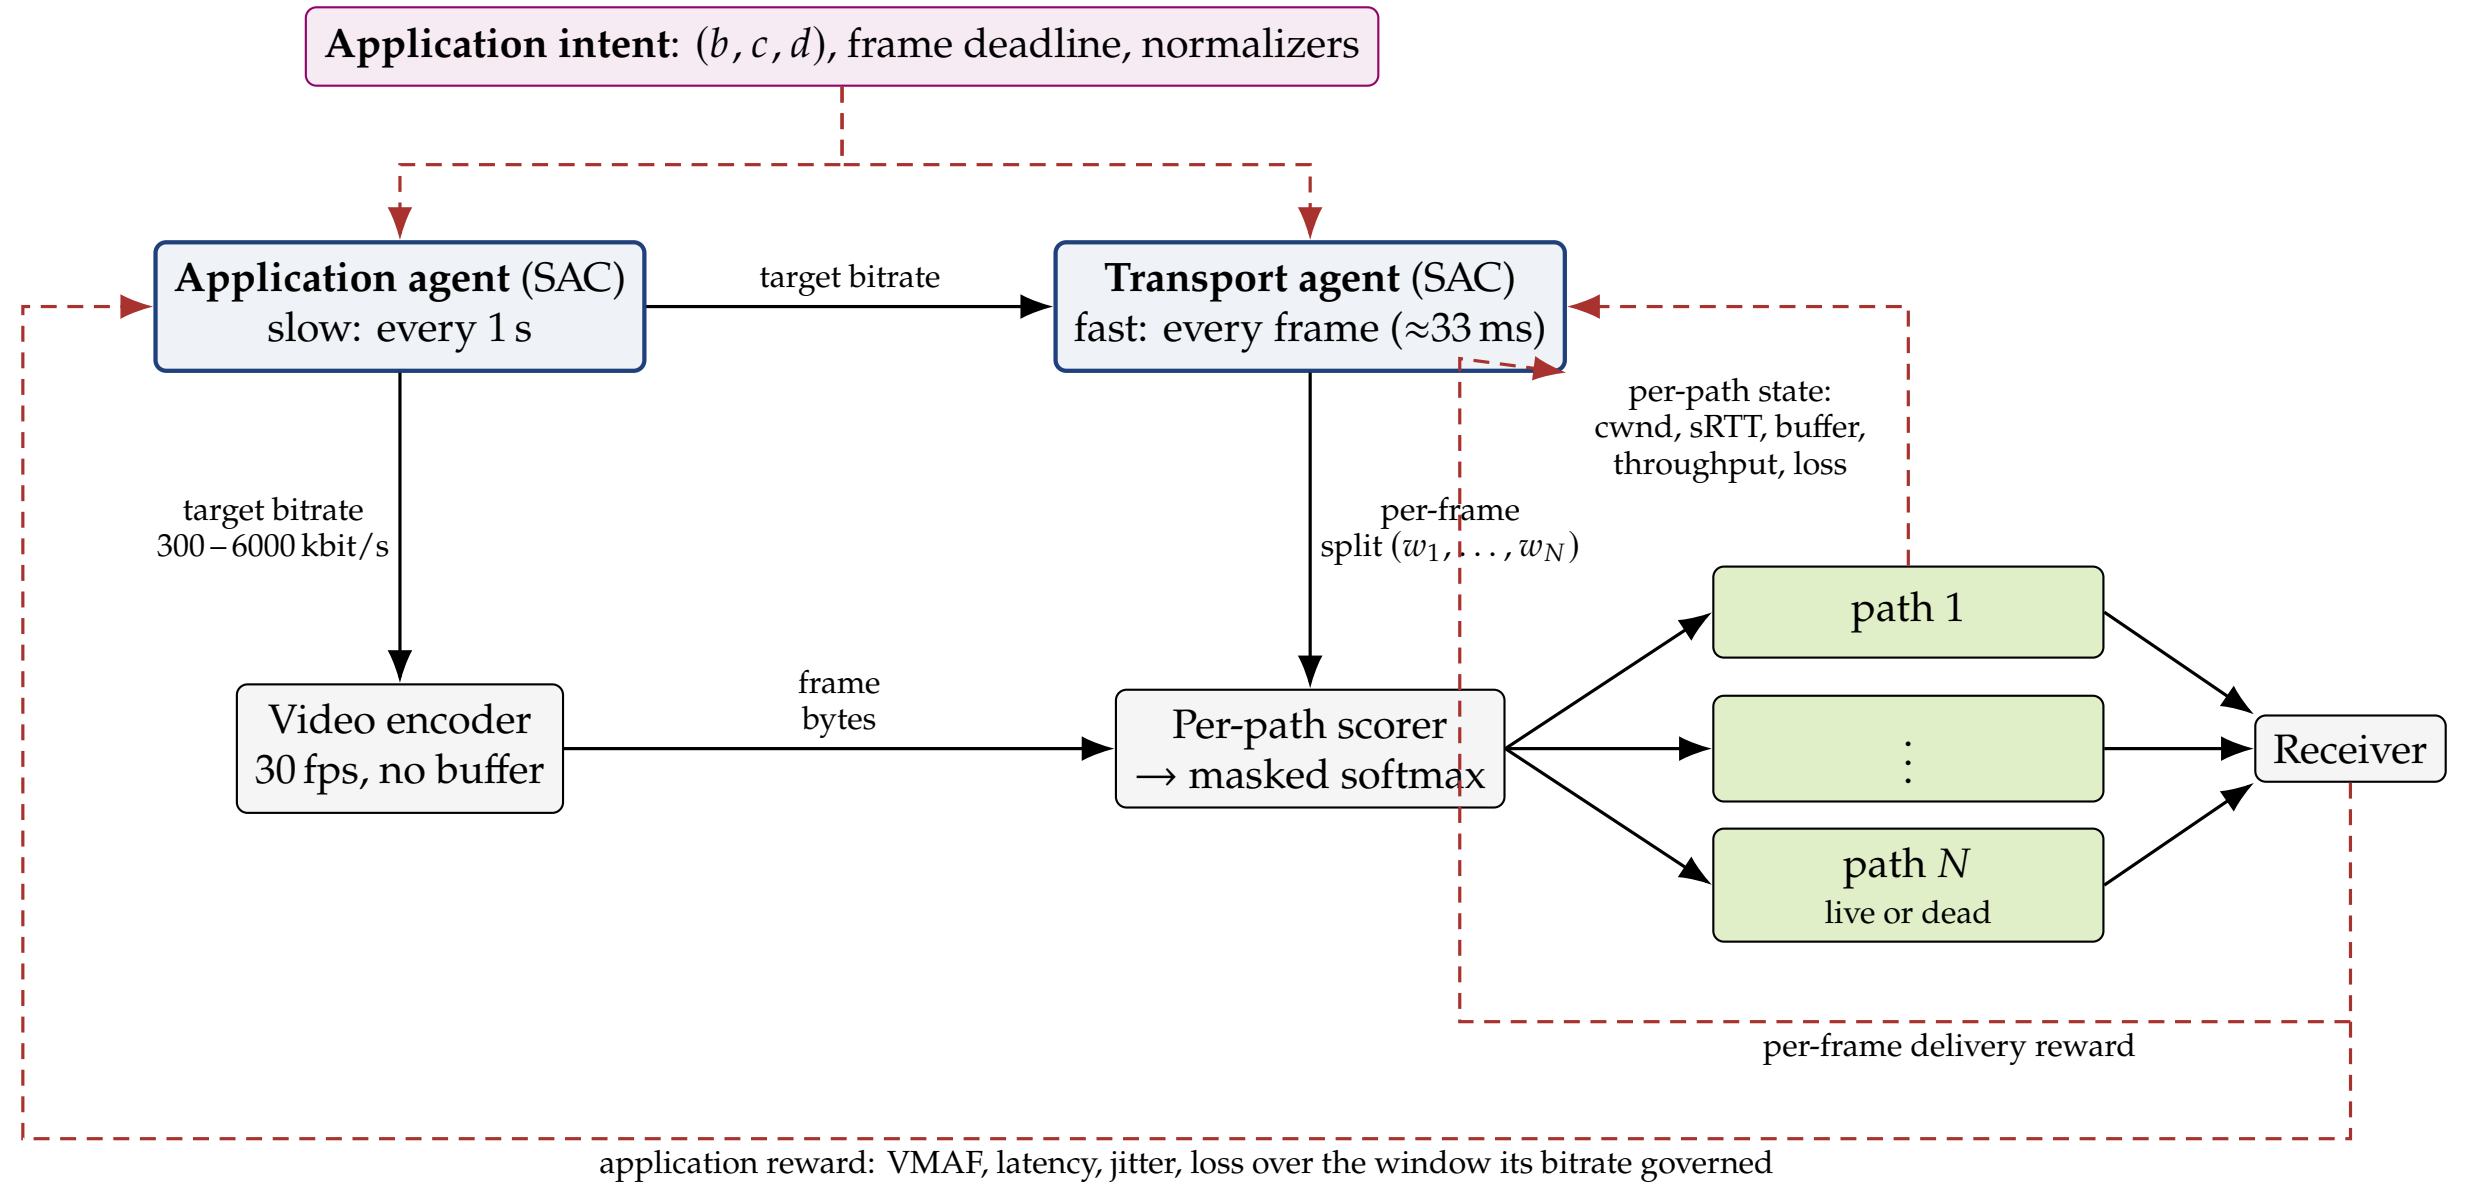

Application intent: (b, c, d), frame deadline, normalizers
Application agent (SAC)
slow: every 1 s
target bitrate
Transport agent (SAC)
fast: every frame (≈33 ms)
per-path state:
cwnd, sRTT, buffer,
throughput, loss
target bitrate
300 – 6000 kbit/s
per-frame
split (w1, . . . , wN)
path 1
Video encoder
30 fps, no buffer
frame
bytes
Per-path scorer
→ masked softmax
⋮
Receiver
path N
live or dead
per-frame delivery reward
application reward: VMAF, latency, jitter, loss over the window its bitrate governed