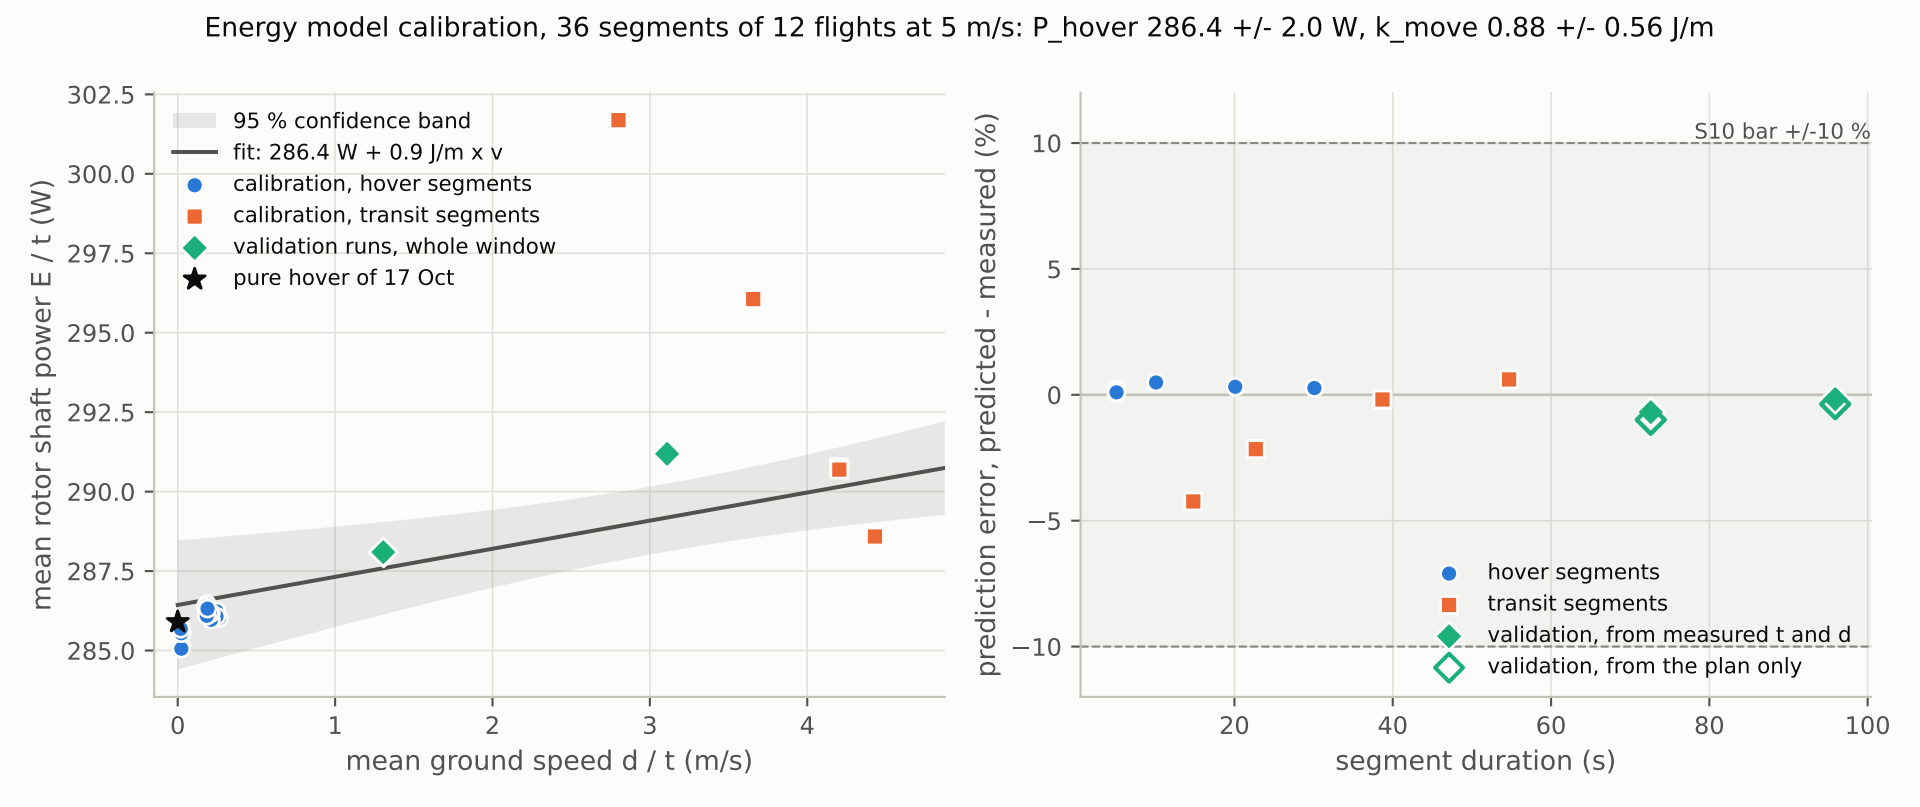
Energy model calibration, 36 segments of 12 flights at 5 m/s: P_hover 286.4 +/- 2.0 W, k_move 0.88 +/- 0.56 J/m
95 % confidence band
fit: 286.4 W + 0.9 J/m x v
calibration, hover segments
calibration, transit segments
validation runs, whole window
pure hover of 17 Oct
mean rotor shaft power E / t (W)
mean ground speed d / t (m/s)
302.5
300.0
297.5
295.0
292.5
290.0
287.5
285.0
0
1
2
3
4
S10 bar +/-10 %
prediction error, predicted - measured (%)
segment duration (s)
hover segments
transit segments
validation, from measured t and d
validation, from the plan only
10
5
0
−5
−10
20
40
60
80
100