
ODIN/SMR

Odin/SMR Product Validation and Evolution Report

Author(s): Donal Murtagh, Andreas Skyman, Bengt Rydberg, and Patrick Eriksson
Contact: Donal Murtagh <donal.murtagh@chalmers.se>
Version: 0.2.0
Date: 2020-03-15

Contents

Contents	iii
1 Introduction	1
1.1 Aim and scope of this document	1
1.2 Document structure	1
2 Odin/SMR Level2 data products	2
2.1 The Odin mission	2
2.2 The SMR instrument	2
2.3 Odin/SMR Level2 data products	3
2.3.1 Main data products	3
2.3.2 Science data products	4
3 Comparisons with other instruments	5
3.1 Frequency mode 01	7
3.1.1 Overview	7
3.1.2 Comparison of retrieved profiles	7
3.1.3 Discussion	11
3.1.4 Conclusions	14
3.2 Frequency mode 02	15
3.2.1 Overview	15
3.2.2 Comparison of retrieved profiles	15
3.2.3 Discussion	19
3.2.4 Conclusions	19
3.3 Frequency mode 08	23
3.3.1 Overview	23
3.3.2 Comparison of retrieved profiles	23
3.3.3 Discussion	26
3.3.4 Conclusions	29
3.4 Frequency mode 13	31
3.4.1 Overview	31
3.4.2 Comparison of retrieved profiles	31
3.4.3 Discussion	35
3.4.4 Conclusions	35
3.5 Frequency mode 19	39
3.5.1 Overview	39
3.5.2 Comparison of retrieved profiles	39
3.5.3 Discussion	43
3.5.4 Conclusions	43

4 Conclusions	46
4.1 General comments	46
4.2 Recomendations	46
4.2.1 Ozone	46
4.2.2 Chlorine Monoxide	47
4.2.3 Water vapour	47
4.2.4 Temperature	47
References	48
Appendix A API description	51
A.1 API calls	51
A.1.1 <code>level2/DDS/</code>	51
A.1.2 <code>level2/DDS/area</code>	51
A.1.3 <code>level2/DDS/locations</code>	52
A.1.4 <code>level2/DDS/products/</code>	53
A.1.5 <code>level2/DDS/<string:date>/</code>	53
A.1.6 <code>level2/DDS/<int:frequencymode>/comments/</code>	53
A.1.7 <code>level2/DDS/<int:frequencymode>/failed/</code>	54
A.1.8 <code>level2/DDS/<int:frequencymode>/products/</code>	55
A.1.9 <code>level2/DDS/<int:frequencymode>/scans/</code>	55
A.1.10 <code>level2/DDS/<int:frequencymode>/<int:scannumber>/</code>	55
A.1.11 <code>level2/DDS/<frequencymode>/<scannumber>/L2/</code>	56
A.1.12 <code>level2/DDS/<int:frequencymode>/<int:scannumber>/L2anc/</code>	56
A.1.13 <code>level2/DDS/<int:frequencymode>/<int:scannumber>/L2i/</code>	57
A.1.14 <code>level2/DDS/<int:frequencymode>/<int:scannumber>/L2c/</code>	58
A.2 Example usage	58
Appendix B Observation modes	59

Chapter 1 | Introduction

1.1 Aim and scope of this document

Odin/SMR performs passive limb measurements of the atmosphere, mainly at wavelengths and frequencies around 0.6 mm and 500 GHz, respectively. From these measurements, profiles of O₃, ClO, N₂O, HNO₃, H₂O, CO, and isotopologues of H₂O, and O₃, that are species of interest for studying stratospheric and mesospheric chemistry and dynamics, can be derived. Odin/SMR has been in operation for approximately 16 years, and thus, the Level2 dataset can potentially be applied for scientifically interesting trend analysis.

The project aims at producing a new Odin/SMR Level2 product dataset with improved long term consistency and precision. This dataset will be based on updated/revised processing algorithms and input data. A verification dataset (VDS) has been created. The VDS is a representative subset of the Odin/SMR Level1B dataset and collocated correlatative measurements from similar instruments, i.e. data from Odin/OSIRIS, Aura/MLS, ENVISAT/MIPAS, ISS/JEM/SMILES, and Meteor3M/SAGEIII. See [Rydberg et al. \(2016b\)](#) for descriptions of data and instruments included in the VDS.

From the VDS a diagnostic dataset (DDS) has been created, containing Level2 products produced with the updated processing system. The aim of this document is to describe the DDS and the main results of comparing it with the correlatative measurements from other instruments, as well as with the Level2 data from the older 2.0/2.1 versions of the Odin/SMR processing chain.

1.2 Document structure

This document is organized as follows: Chapter 2 describes the Odin/SMR Level2 data products. Chapter 3 contains comparisons for several of the Odin/SMR frequency modes and their Level2 data products with collocated measurements from various instruments. Chapter 4 contains conclusions, and the appendix contains additional information on the various observation modes of Odin/SMR.

Chapter 2 | Odin/SMR Level2 data products

2.1 The Odin mission

The Odin satellite was launched on the 20th of February 2001, into a sun-synchronous 18:00 hour ascending node orbit, carrying two co-aligned limb sounding instruments: OSIRIS (Optical spectrograph and infrared imaging system) and SMR (Sub-millimetre radiometer) ([Murtagh et al., 2002](#)). Originally, Odin was used for both atmospheric and astronomical observations, but since 2007 only its aeronomy mission is active. Odin is a Swedish-led project, in cooperation with Canada, France and Finland. Both of Odin's instruments are still functional, and the present operation of the satellite is partly performed as an ESA third party mission.

2.2 The SMR instrument

The Odin/SMR package is highly flexible ([Frisk et al., 2003](#)). In short, the four main receiver chains can be tuned to cover frequencies in the ranges 486–504 GHz and 541–581 GHz, but the maximum total instantaneous bandwidth is only 1.6 GHz. This bandwidth is determined by the two auto-correlation spectrometers (ACs) used for atmospheric observations. The two ACs can be coupled to any of the four front-ends, but only two or three front-ends are used simultaneously. The ACs cover 400 or 800 MHz per front-end, depending on configuration. In the configuration applied for atmospheric sounding, the channels of the ACs have a spacing of 1 MHz, while the frequency resolution is only 2 MHz. To cover all molecular transitions of interest (see Table 2.1 and Table 2.2 for an overview), a number of “observation modes” have been defined. Each observation mode makes use of two or three frequency bands. Single sideband operation is obtained by tunable Martin-Pupplet interferometers. The nominal sideband suppression is better than 19 dB across the image band.

Odin/SMR also has a receiver chain around the 118 GHz oxygen transition that was heavily used during Odin's astronomy mission. For the atmospheric mission, this front-end was planned to be used for retrieving temperature profiles, but a technical problem (drifting LO frequency) and the fact that the analysis requires treatment of Zeeman splitting have given these data low priority.

The main reflector of Odin/SMR has a diameter of 1.1 m, giving a vertical resolution at the tangent point of about 2 km. The vertical scanning of the two instruments' line-of-sight is achieved by a rotation of the satellite platform, with a rate matching a vertical speed of the tangent altitude of 750 m/s. Measurements are performed during both upward and downward scanning. The lower end of the scan is typically at about 7 km, the upper end

Table 2.1: Characteristics of Odin/SMR Level2 main data products for version 2 of the processing chain.

Product	Frequency [GHz]	Vertical coverage	Vertical resolution	Precision	Reference
O ₃	501.5 (FM 01)	~19–50 km	~2 km	0.5–2 ppmv	(Urban et al., 2005)
ClO	501.3 (FM 01)	~19–67 km	1.5–2 km	0.15–0.2 ppbv	(Urban et al., 2005)
N ₂ O	502.3 (FM 01)	~15–70 km	~1.5 km	15–35 ppbv	(Urban et al., 2005)
O ₃	544.9 (FM 02)	~18–70 km	~1.5 km	0.2–0.4 ppmv	(Urban et al., 2005)
HNO ₃	544.4 (FM 02)	~21–67 km	1.5–2 km	1 ppbv	(Urban et al., 2005)

Table 2.2: Characteristics of Odin/SMR Level2 science data products for version 2 of the processing chain.

Product	Frequency [GHz]	Vertical coverage	Vertical resolution	Precision	Reference
CO	578.6 (FM 22)	~17–110 km	3–4 km	25 ppbv–2 ppmv	(Dupuy et al., 2004)
H ₂ ¹⁶ O	556.9 (FM 19)	~40–100 km	~3 km	0.5–1 ppmv	(Urban et al., 2007)
H ₂ ¹⁶ O	488.5 (FM 17)	~20–70 km	~3 km	0.5–1 ppmv	(Urban et al., 2007)
HDO	490.6 (FM 17)	~20–70 km	3–4 km	0.5 ppbv	(Urban et al., 2007)
H ₂ ¹⁸ O	489.1 (FM 08)	~20–65 km	3–4 km	20–30 ppbv	(Urban et al., 2007)
H ₂ ¹⁷ O	552.0 (FM 21)	~20–70 km	~3 km	0.4 ppbv	(Urban et al., 2007)
NO	551.7 (FM 21)	~40–100 km	~7 km	40 %	(Sheese et al., 2013)
¹⁶ O ¹⁸ O ¹⁶ O	490.4 (FM 17)	~27–41 km	4–6 km	25 %	(Urban et al., 2013)
¹⁶ O ¹⁶ O ¹⁸ O	490.0 (FM 17)	~25–45 km	3–4 km	25 %	(Urban et al., 2013)
¹⁶ O ¹⁶ O ¹⁷ O	490.6 (FM 17)	~31–39 km	5–6 km	25 %	(Urban et al., 2013)

varies between 70 and 110 km, depending on observation mode. In correspondence, the horizontal sampling ranges from 1 scan per 600 km to 1 scan per 1000 km. Measurements are in general performed along the orbit plane, providing a latitude coverage between 82.5°S and 82.5°N. Since the end of 2004 Odin is also pointing off-track during certain periods, e.g. during the austral summer season, allowing the latitudinal coverage to be extended towards the poles.

2.3 Odin/SMR Level2 data products

Odin/SMR data are categorized into main and science Level2 products, and Table 2.1 and Table 2.2 describe the characteristics of these products, respectively. The main products are retrieved from the so called “stratospheric” observation mode of Odin/SMR, and this mode cover approximately 50 % of the Odin/SMR observation time. In this mode spectra in frequency bands around 501 and 544 GHz are collected. The science data products are derived from less frequently applied observation modes (typically applied a few days per month).

2.3.1 Main data products

Ozone, ClO, N₂O, and HNO₃ profiles are the main Odin/SMR Level2 products. ClO and N₂O profiles are retrieved from spectra covering transitions around 501 GHz, and

HNO_3 from spectra around 544 GHz. Ozone can be retrieved from both the 501 and the 544 GHz band. Table 2.1 describes characteristics of these Level2 products that have been derived from earlier Odin/SMR Level2 data studies. The characteristics can not be expected to be changed/improved dramatically for a new Level2 data product, because these characteristics depend on the physics of the measurement and the sensor.

Possibly more important than the characteristics described in Table 2.1 are the accuracy and stability of the profiles, since the latter enable trend studies. The overall aim of the new Level2 data processing also reflects this aspect, and the objective is therefore that the accuracy and stability outperforms that from earlier Odin/SMR Level2 data products.

2.3.2 Science data products

Profiles of H_2O , CO, NO and isotopologues of H_2O , and O_3 are considered as science data products for Odin/SMR, and characteristics of these products are described in Table 2.2. Observations covering the science data products are performed on a less frequent basis than the main data products. The aim of the Level2 processing of the science data products is in principle identical to that for the main data products, although the main data products will be given a higher priority.

Chapter 3 | Comparisons with other instruments

This chapter contains comparisons between the Level2 data products of Odin/SMR and collocated measurements from various instruments as accumulated in the Validation Data Set (VDS) [Rydberg et al. \(2016b\)](#). The VDS covers the period 2003–2015. This implies that the DDS also is restricted to the same period. The comparisons are organised primarily on frequency mode, secondarily on data product. For each product, average deviations from the various instruments at different altitudes are investigated, followed by an investigation of the overall correlation between the measurements and both Odin/SMR v2 and v3. The Odin/SMR measurement response and averaging kernels are also investigated for each data product [Eriksson \(2017\)](#) . This has been carried out for the main data products i.e. those from FM 01, FM 02, FM 08, FM 13 and FM 19. The other science mode products require separate treatment since they must be compared to special products from the other instruments. This cannot be done in the context of this report.

From the correlation some key performance indicators are obtained and presented in a table. Of these the most important are the *Pearson correlation* and *slope*, both of which should be as close as possible to unity for a good match, and the *intercept*, which should ideally be zero.

3.1 Frequency mode 01

3.1.1 Overview

Frequency mode 01 monitors two bands, 501.180–501.580 GHz and 501.980–502.380 GHz. Its main use is retrievals of O₃, ClO and N₂O. This ozone product has previously been used as the main Odin ozone product despite the weak line and thereby noisy profiles. Spectra from this observation mode are shown in Figure 3.1. We hope that this reprocessing will make the FM 02 ozone the main product.

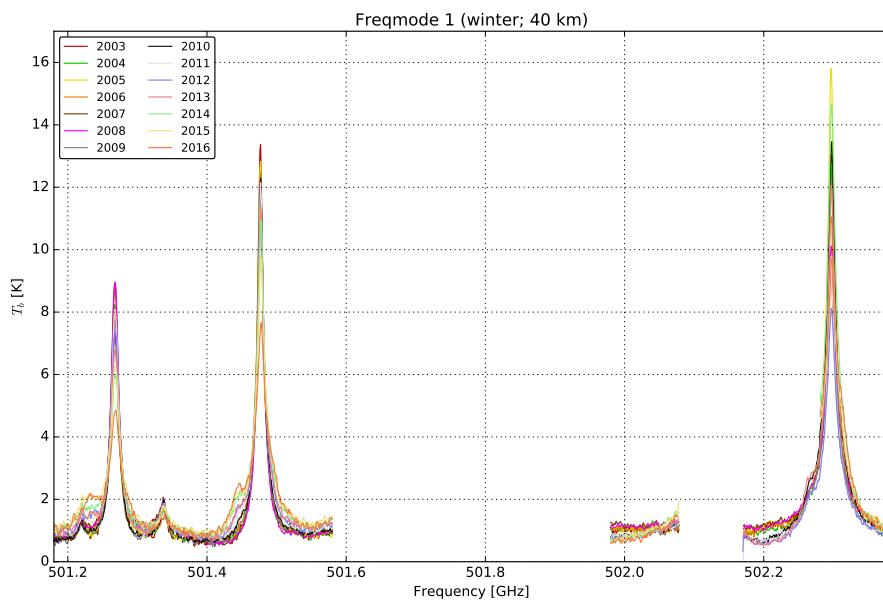


Figure 3.1: Annual median spectra for FM 01 for altitude interval 35–45 km at equatorial latitudes during the arctic winter.

3.1.2 Comparison of retrieved profiles

3.1.2.1 O₃

The retrievals for O₃ have been compared with data from the MIPAS, MLS, OSIRIS and SAGE III instruments. Annual average differences to these instruments are shown in Figure 3.2. In Figure 3.3 individual retrievals for the instruments for the 2003–2014 (depending on the instrument) are plotted against the retrievals from the new and old versions of the Odin/SMR processing chain. The results show a considerable improvement with the updated version of the processing, with much better overall correlation and coherency, and most of the systematic under estimation having been removed compared to all instruments except for SAGE III. Compared to SAGE III, the results were bad for Odin/SMR v2.X, but are even worse for Odin/SMR v3. This may be attributed to the fact that the collocated measurements for SAGE III are all from altitude range 40–50 km, which is the upper range of altitudes for this frequency mode, and the lower range for the SAGE III instrument, as seen in Figure 3.2d.

A clear drift in the results is seen after 2009 and data from 2010–2017 should be treated with extreme care. The reason for the drift has now been identified as an instrument

problem where an unstable oscillator has widened the instrument line-profile. This may be possible to correct for in a later version of the data but will require an in depth study of the problem and possible corrections strategies. Data from 2018 and onward seems to be free of this problem thanks to a retuning of some parameters on-board the satellite. The useful range for the product and the vertical resolution is shown in Figure 3.4. Based on an analysis of the averaging kernels and comparisons with the other instruments the product is useful for the range 19–50 km with a resolution of around 5 km. The resolution is slightly degraded compared to the version 2.x product due to increased vertical correlation used to stabilise the retrievals.

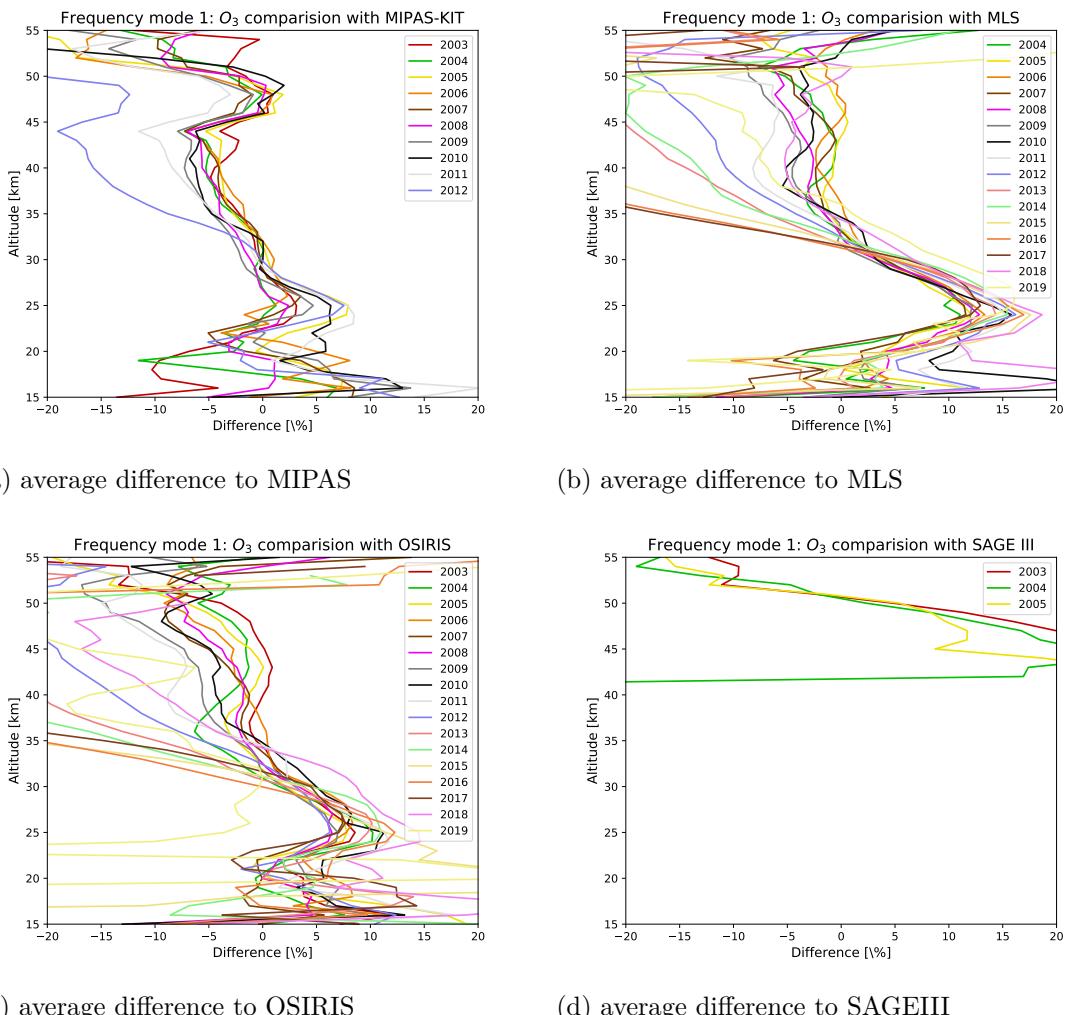


Figure 3.2: Average difference in percent between retrievals of O_3 from Odin/SMR v3 and collocated measurements from various instruments at different altitudes for frequency mode 01.

3.1.2.2 N_2O

The retrievals for N_2O have been compared with data from the MIPAS and MLS instruments. Annual average differences to these instruments are shown in Figure 3.5. In Figure 3.6 individual retrievals for the instruments for the entire period are plotted against

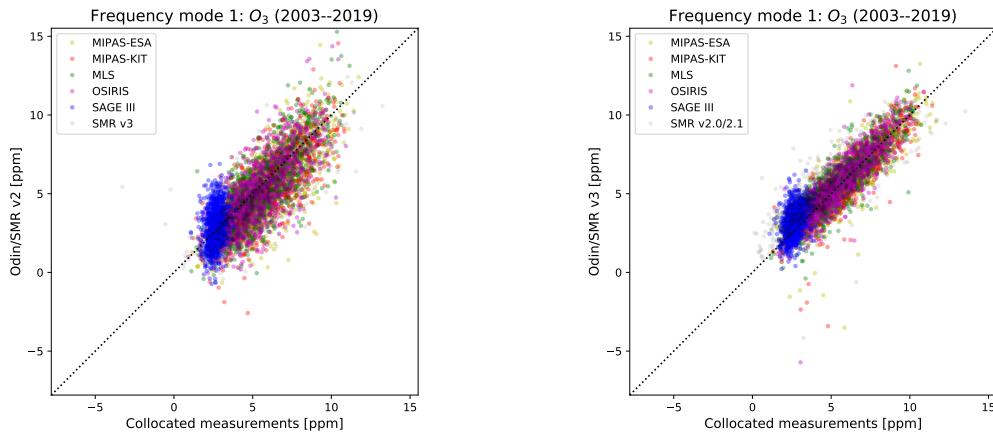


Figure 3.3: Correlation between retrievals of O₃ using Odin/SMR versions 2.X and 3 and collocated measurements from various instruments for frequency mode 01.
The period is restricted to 2003-2008 in order to avoid the errors caused by the LO from 2009 -2018.


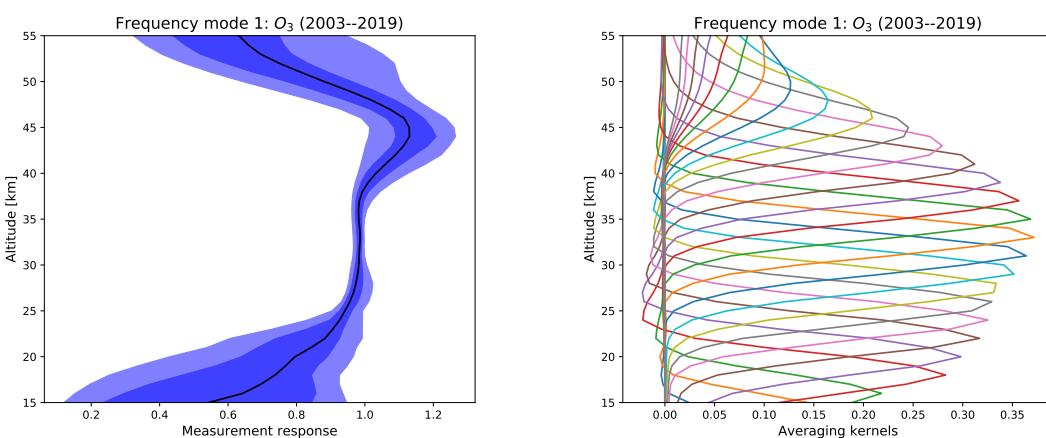


Figure 3.4: Measurement response and averaging kernels for O₃ retrievals for Odin/SMR v3 at different altitudes for frequency mode 01.


the retrievals from the new and old versions of the Odin/SMR processing chain. Only a minor improvement is seen with the updated version of the processing. Figure 3.7 suggests that the product is useful over the range 15–50 km with a vertical resolution of around 5 km.

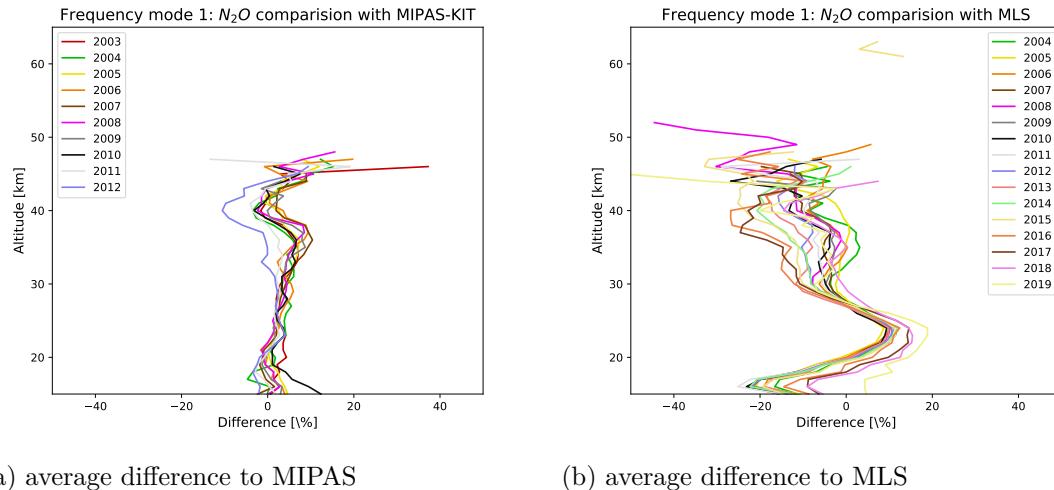

(a) average difference to MIPAS

(b) average difference to MLS

Figure 3.5: Average difference in percent between retrievals of N_2O from Odin/SMR v3 and collocated measurements from various instruments at different altitudes for frequency mode 01. (Retrievals yielding concentrations $\leq 0.03 \text{ ppm}$ have been filtered out.)

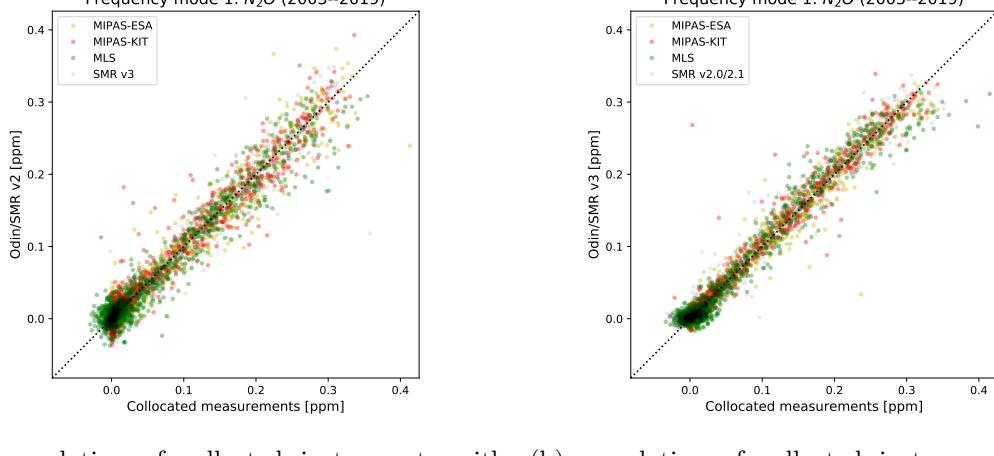


(a) correlation of collcated instruments with Odin/SMR v2.X

(b) correlation of collcated instruments with Odin/SMR v3

Figure 3.6: Correlation between retrievals of N_2O using Odin/SMR versions 2.X and 3 and collocated measurements from various instruments for frequency mode 01.

3.1.2.3 ClO

The retrievals for ClO have been compared with data from the MLS instrument. Annual average differences to MLS are shown in Figure 3.8. In Figure 3.9 individual retrievals from MLS for the entire period are plotted against the retrievals from the new and old

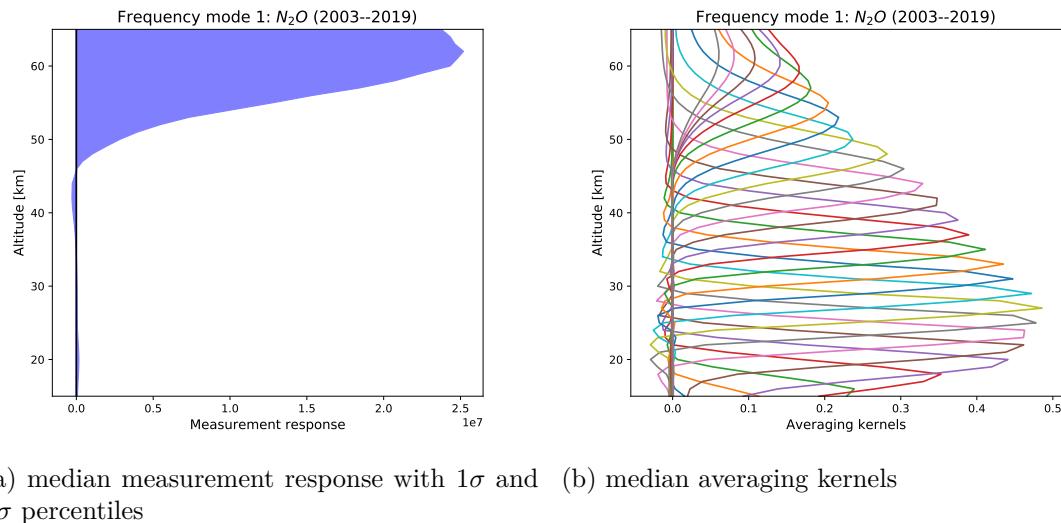

(a) median measurement response with 1 σ and 2 σ percentiles (b) median averaging kernels

Figure 3.7: Measurement response and averaging kernels for N₂O retrievals for Odin/SMR v3 at different altitudes for frequency mode 01.

versions of the Odin/SMR processing chain. No sizeable improvement is seen for the new version of the Odin/SMR processing chain compared to MLS, and the correlation and coherency between the two remains poor, however, Figure 3.9 suggests that this is due to noisy nature of the MLS retrievals, which show a very large spread – sometimes even large negative concentrations – for the retrievals where both Odin/SMR versions yield low ClO concentrations. A further explanation is that, since ClO concentrations have a diurnal cycle, collocation in time is very important for comparisons, and due to the orbits of the two instruments, this is only really satisfied near the poles. In this comparison we have not attempted to separate periods of chlorine activation from period with a normal vertical distribution. From previous experience we know that the diurnal effect can be very large in such comparisons. Figure 3.10 suggests that the product is useful in the range 18–55 km with a vertical resolution of around 5 km.

3.1.3 Discussion

The Pearson correlation between the Odin/SMR retrievals and the other instruments was calculated for the overlap periods for both versions of the processing chain. The results are summarised in Table 3.1, and show that the new algorithm is an improvement compared to all the instruments (with the exception of SAGE) for all species used in this investigation. The improvement is considerable for the O₃, but only slight for N₂O and ClO, with the latter still showing very poor correlation with the collocated MLS data. Correlations and fits were also calculated for the individual years in the period (see Figure 3.11), but no trends of note were seen until 2009, when a instrument problem occurred or possibly increased which renders retrievals from frequency mode 01 unreliable outside the arctic summer months. The problem caused asymmetric broadening of the lines resulting in bad fits and reduced species concentrations. It may be possible to compensate for the effect in a later reprocessing and rescue the data but this is not yet clear. The problem was fixed late in 2017 through retuning of driving circuits by the instrument scientist. Averaging of some weeks of spectra show that the distortions of the lines has been removed.



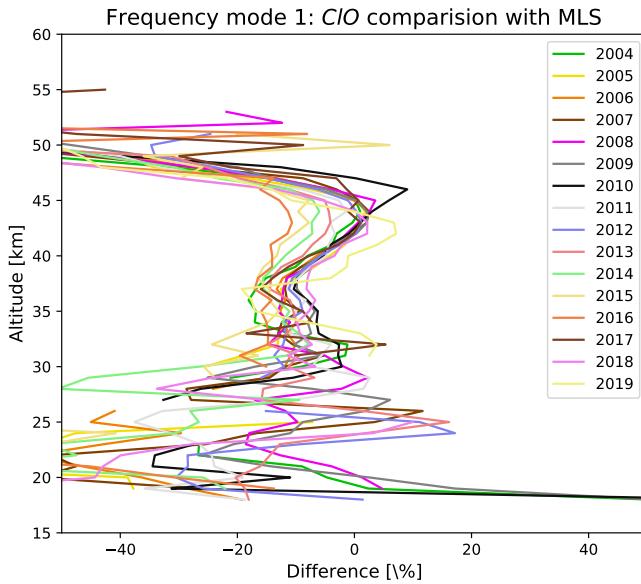


Figure 3.8: Average difference in percent between retrievals of ClO from Odin/SMR v3 and collocated measurements from MLS at different altitudes for frequency mode 01. (Retrievals yielding concentrations ≤ 0.3 ppb have been filtered out.)

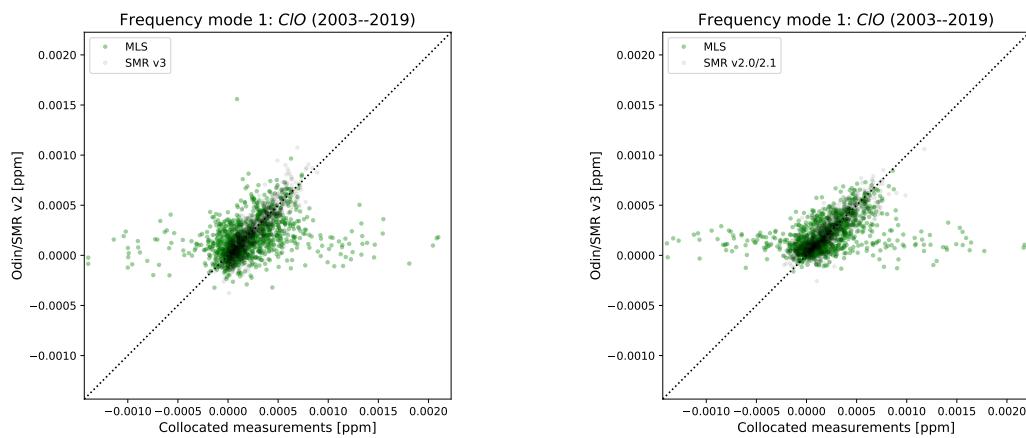

(a) correlation of collocated MLS measurements with Odin/SMR v2.X (b) correlation of collocated MLS measurements with Odin/SMR v3

Figure 3.9: Correlation between retrievals of ClO using Odin/SMR versions 2.X and 3 and collocated measurements MLS for frequency mode 01.

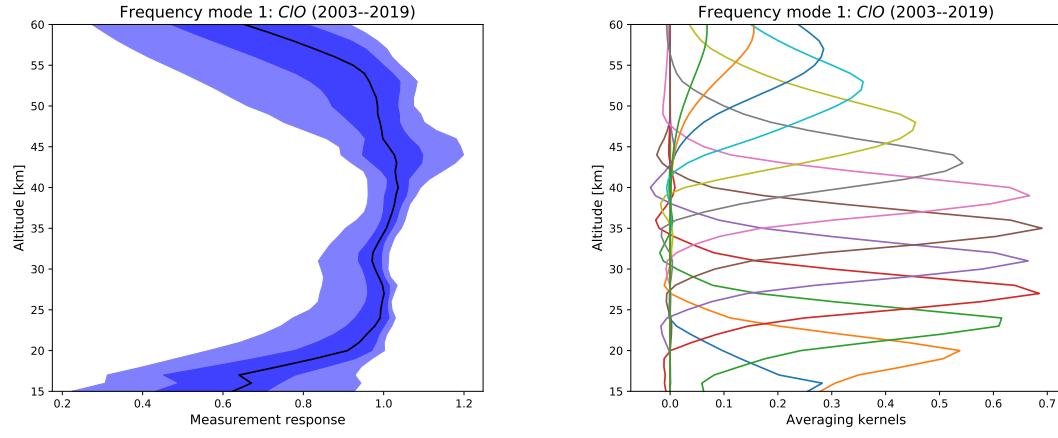

(a) median measurement response. 1σ and 2σ percentiles are also shown
(b) median averaging kernels

Figure 3.10: Measurement response and averaging kernels for ClO retrievals for Odin/SMR v3 at different altitudes for frequency mode 01.

Table 3.1: Pearson correlation and fit parameters of the old and new Odin/SMR retrievals for frequency mode 01, compared with collocated data from other instruments for the period 2003–2019. $|\langle \text{res.} \rangle|$ is the mean residual.

Species	Instrument	SMR	corr.	slope	intercept	$ \langle \text{res.} \rangle $
O3	MIPAS (KIT)	v3	0.900	0.979	0.044 ppm	1.056 ppm
		v2.x	0.789	0.908	0.007 ppm	1.497 ppm
	MIPAS (ESA)	v3	0.887	0.959	0.108 ppm	1.128 ppm
		v2.x	0.778	0.885	0.098 ppm	1.548 ppm
	MLS	v3	0.898	0.999	0.129 ppm	1.030 ppm
		v2.x	0.778	0.923	0.095 ppm	1.436 ppm
	OSIRIS	v3	0.918	1.005	0.053 ppm	0.890 ppm
		v2.x	0.783	0.951	-0.101 ppm	1.426 ppm
	SAGE III	v3	0.439	1.023	0.371 ppm	0.943 ppm
		v2.x	0.275	0.840	0.654 ppm	1.193 ppm
N_2O	MIPAS (KIT)	v3	0.983	0.985	2.844 ppb	16.750 ppb
		v2.x	0.975	0.979	2.786 ppb	20.055 ppb
	MIPAS (ESA)	v3	0.017	0.000	67.659 ppb	19.677 ppm
		v2.x	0.086	0.007	67.000 ppb	1.148 ppm
	MLS	v3	0.976	0.960	2.062 ppb	19.809 ppb
		v2.x	0.968	0.940	2.632 ppb	22.881 ppb
ClO	MLS	v3	0.259	0.098	0.177 ppb	0.436 ppb
		v2.x	0.238	0.109	0.160 ppb	0.441 ppb

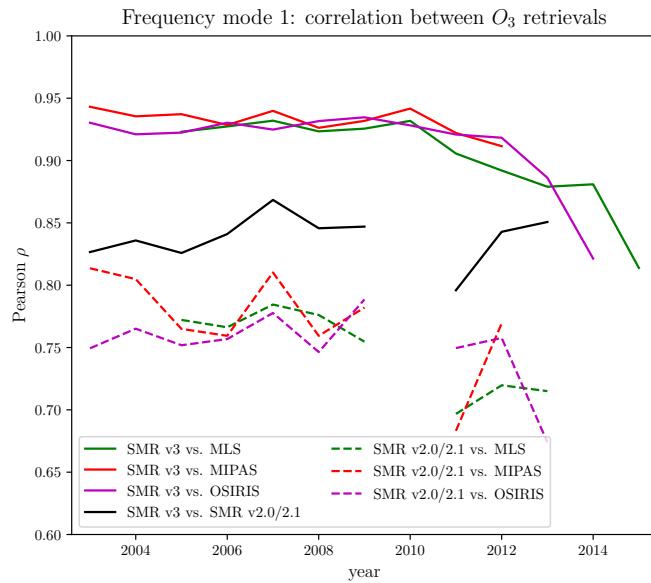


Figure 3.11: Pearson correlation (ρ) of Odin/SMR v3 (—) and v2.X (--) retrievals of O_3 with collocated measurements. Note the decline in ρ after 2009.

3.1.4 Conclusions

Based on the discussion above, retrievals based on frequency mode 01 can be used with confidence for the species O_3 and N_2O for the period 2003–2008. Retrievals of ClO based on this frequency mode should be used with some caution taking account of the local time of the observations.

For the period 2009–2017 all retrievals from frequency mode 01 should be used with caution, if at all, due to the problem discussed in Sec. 3.1.3. The only exceptions are retrievals from the middle of the arctic summer, which are not affected by this problem as a result of the satellite being colder during this period Eriksson and Urban (2006). The problem was fixed in late 2017, wherefore data from 2018 and onwards should have the same quality as that of 2003–2008. This is confirmed by the comparisons.

3.2 Frequency mode 02

3.2.1 Overview

Frequency mode 02 monitors the band 544.102–544.902 GHz. Its main use is retrievals of O₃ and HNO₃. This mode was intended to be the main measurement of ozone in the stratosphere but in previous versions of the data products suffered with large systematic biases. We believe that this was caused by an incorrect line broadening constant. This also resulted in an unrealistic pointing offset being derived for this band. In this version of the product the coefficient was adjusted to remove the pointing offset and at the same time greatly improved the ozone values. Spectra from this observation mode are shown in Figure 3.12.

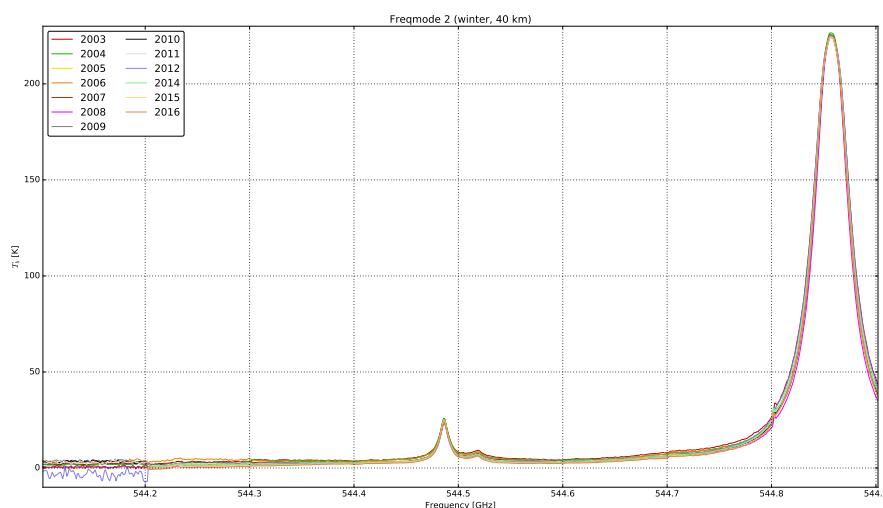


Figure 3.12: Annual median spectra for FM 02 for altitude interval 35–45 km at equatorial latitudes during the arctic winter.

3.2.2 Comparison of retrieved profiles

3.2.2.1 O₃

The retrievals for O₃ have been compared with data from the MIPAS, MLS, OSIRIS and SAGE III instruments. Annual average differences to these instruments are shown in Figure 3.13. In Figure 3.14 individual retrievals for the instruments for the entire period are plotted against the retrievals from the new and old versions of the Odin/SMR processing chain. The results show a considerable improvement with the updated version of the processing, with much better over-all correlation and coherency, and most of the systematic under estimation having been removed compared to all the considered instruments. The largest improvement is compared to SAGE III, though, as seen in Figure 3.13d, there are still large systematic differences depending on the altitude. This could be a result of the difference in local time at the measurement location. At these altitudes ozone starts to exhibit a diurnal variation. This speculation could be supported by the good agreement with SAGE since it is an occultation instrument and therefore measures closest to Odin’s local time. Figure 3.15 suggests that the product is useful over the range 17–77 km with

a vertical resolution of around 3.5 km.

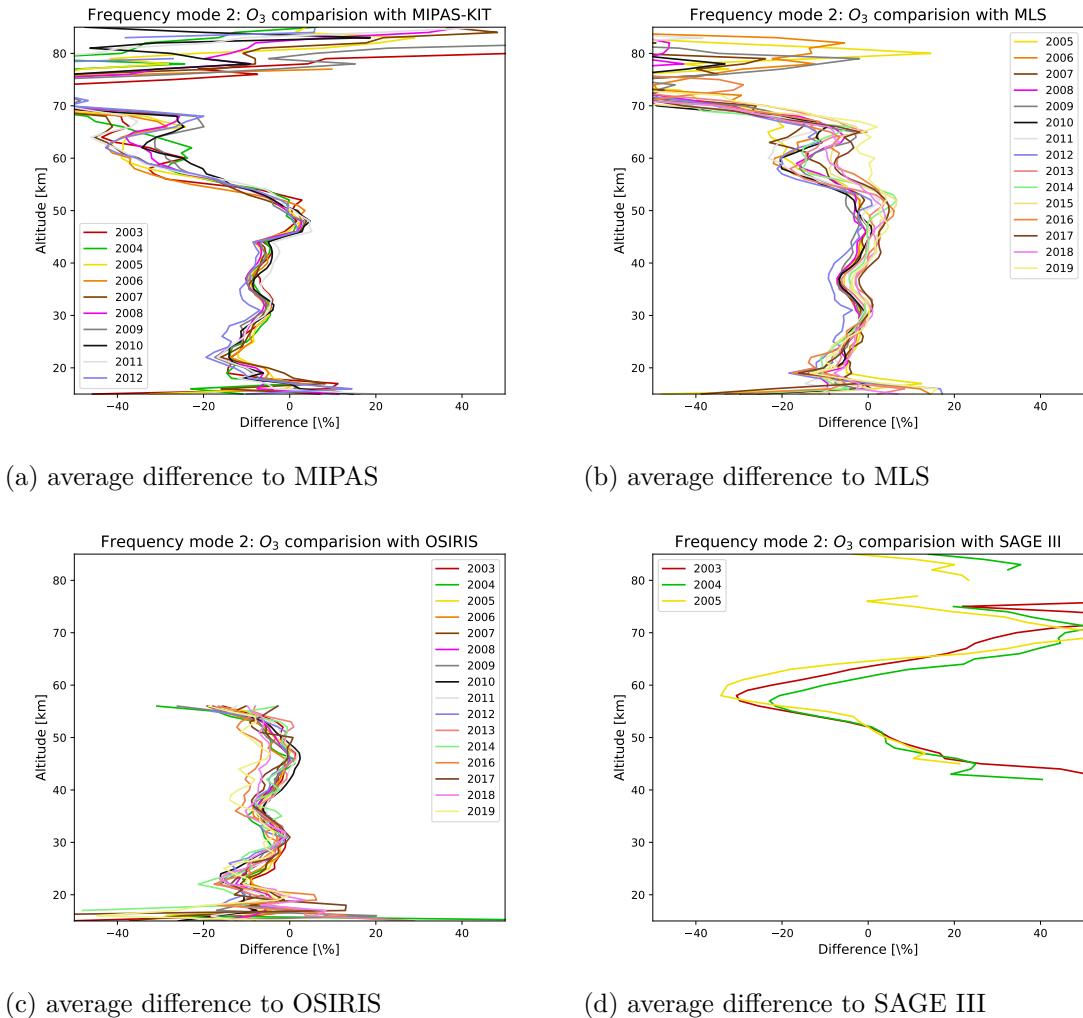


Figure 3.13: Average difference in percent between retrievals of O_3 from Odin/SMR v3 and collocated measurements from various instruments at different altitudes for frequency mode 02. (Retrievals yielding concentrations ≤ 0.1 ppm have been filtered out.)

3.2.2.2 HNO_3

The retrievals for HNO_3 have been compared with data from the MIPAS and MLS instruments. Annual average differences to these instruments are shown in Figure 3.16. In Figure 3.17 individual retrievals for the instruments for the entire period are plotted against the retrievals from the new and old versions of the Odin/SMR processing chain. The results show a considerable improvement with the updated version of the processing compared to both considered instruments with respect to the over-all correlation and coherency is much better. However a large altitude dependent difference seems to have been introduced, resulting in Odin/SMR over estimating the concentrations. The reason for this has not been identified despite considerable effort. At the current time we are without ideas as to how to proceed to improve the discrepancy. Figure 3.18 suggests that the product is useful over the range 20–60 km with a vertical resolution of around 6 km.


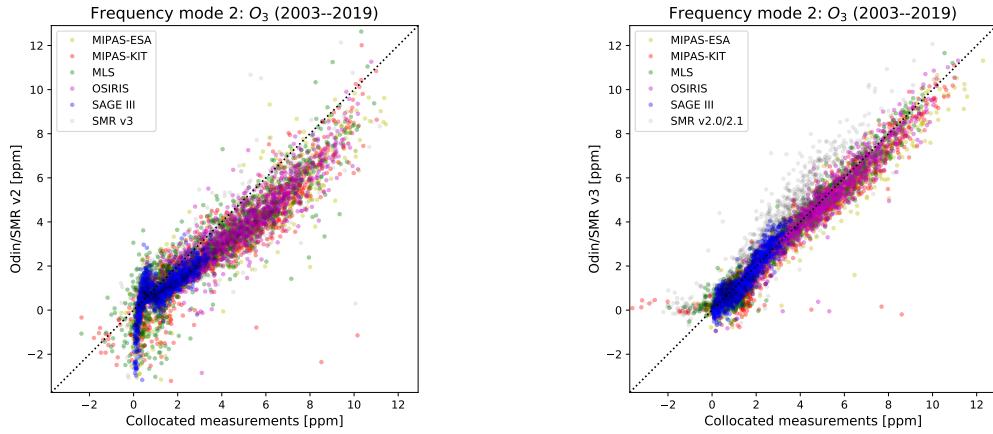


Figure 3.14: Correlation between retrievals of O₃ using Odin/SMR versions 2.X and 3 and collocated measurements from various instruments for frequency mode 02.

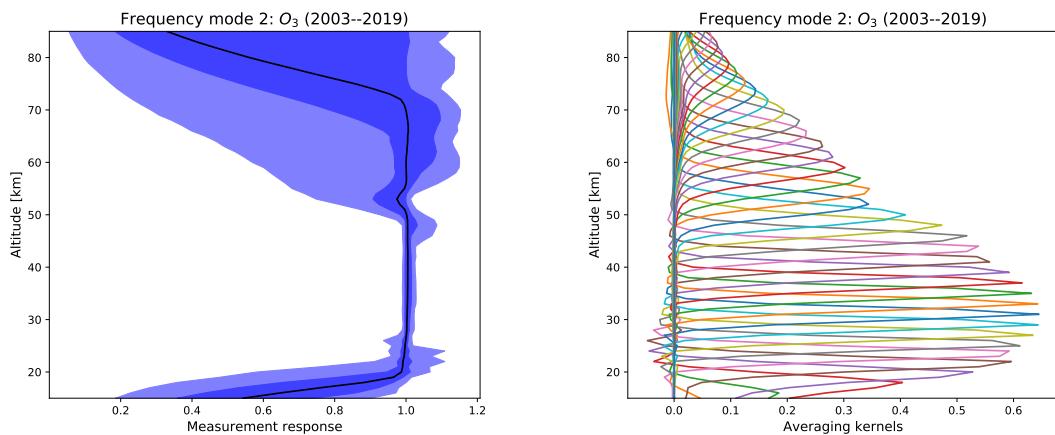

(a) median measurement response with 1 σ and 2 σ percentiles

(b) median averaging kernels

Figure 3.15: Measurement response and averaging kernels for O₃ retrievals for Odin/SMR v3 at different altitudes for frequency mode 02.



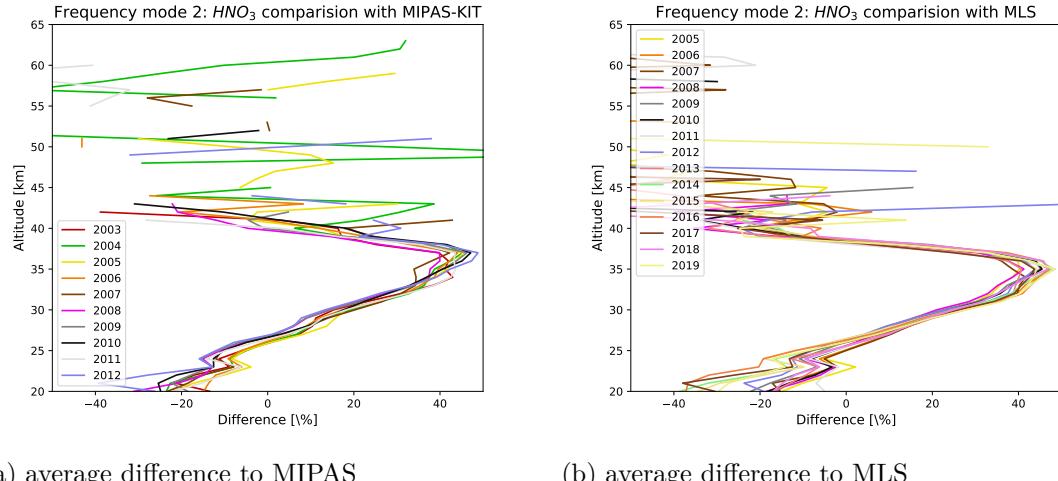


Figure 3.16: Average difference in percent between retrievals of HNO_3 from Odin/SMR v3 and collocated measurements from various instruments at different altitudes. (Retrievals yielding concentrations $\leq 0.5 \text{ ppb}$ have been filtered out.)

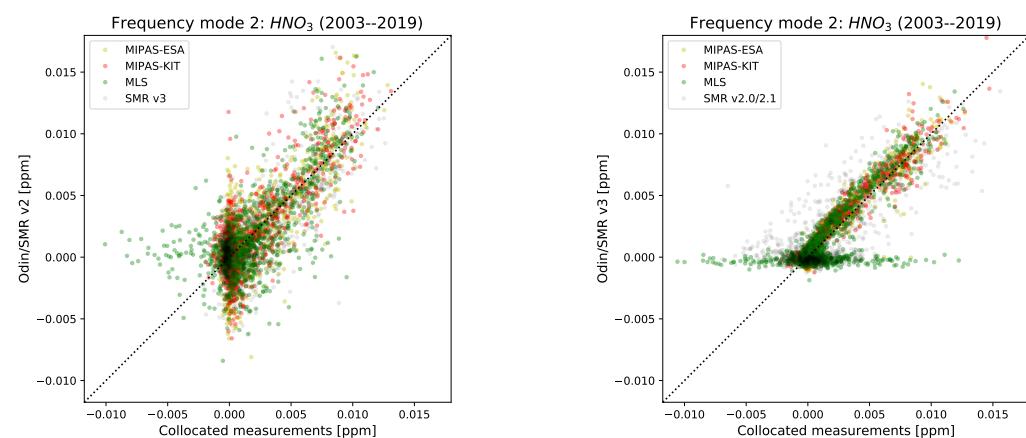

(a) correlation of collcated instruments with (b) correlation of collcated instruments with
Odin/SMR v2.X Odin/SMR v3

Figure 3.17: Correlation between retrievals of HNO_3 using Odin/SMR versions 2.X and 3 and collocated measurements from various instruments.

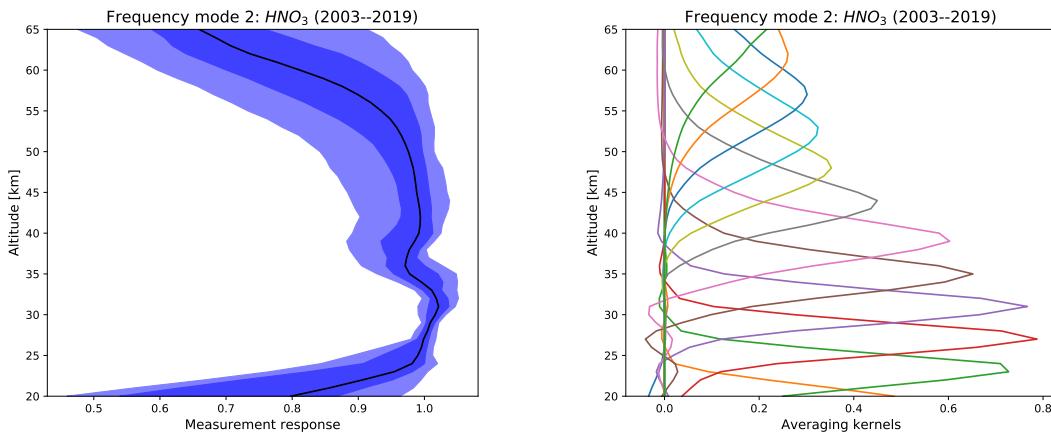

(a) median measurement response with 1σ and 2σ percentiles (b) median averaging kernels

Figure 3.18: Measurement response and averaging kernels for HNO_3 retrievals for Odin/SMR v3 at different altitudes for frequency mode 02.

3.2.2.3 Temperature

The retrievals for temperature have been compared with data from the MLS instrument. Annual average differences to this instrument are shown in Figure 3.19. In Figure 3.20 individual retrievals from MLS for the entire period are plotted against the retrievals from the new and old versions of the Odin/SMR processing chain. The results show a considerable improvement with the updated version of the processing, with much better over-all correlation and coherency, though a small systematic under estimation of the temperature remains, in particular at high altitudes. Figure 3.21 suggests that the product is useful over the range 20–60 km with a vertical resolution of around 7.5 km.

3.2.3 Discussion

The Pearson correlation between the Odin/SMR retrievals and the other instruments was calculated for the entire period for both versions of the processing chain. The results are summarised in Table 3.2, and show that the new algorithm is an improvement compared to all the instruments for all species used in this investigation. The improvement is considerable for both O_3 and HNO_3 .

3.2.4 Conclusions

Based on the discussion above, retrievals based on frequency mode 02 can be used with confidence for the species O_3 and for temperature. For HNO_3 , some caution is warranted. We hope to solve this problem before the entire data set is processed.



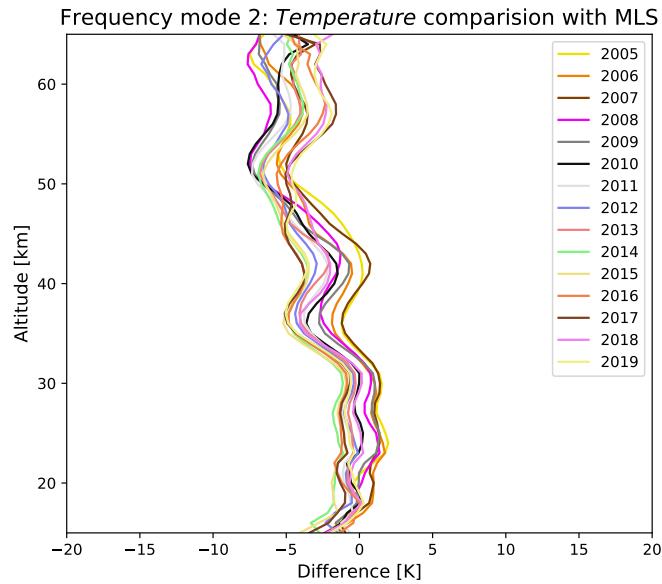


Figure 3.19: Average difference in K between retrievals of temperature from Odin/SMR v3 and collocated measurements from MLS at different altitudes.

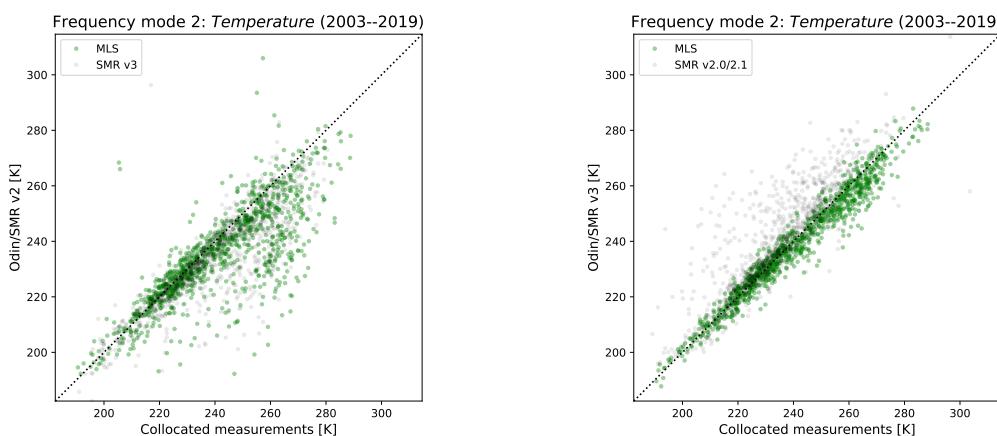

(a) correlation of collocated instruments with Odin/SMR v2.X (b) correlation of collocated instruments with Odin/SMR v3

Figure 3.20: Correlation between retrievals of temperature using Odin/SMR versions 2.X and 3 and collocated measurements from various instruments.

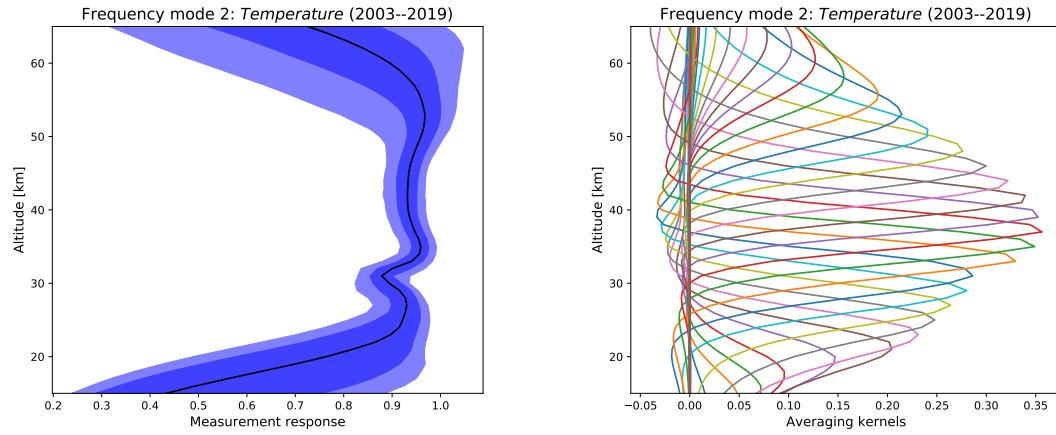

(a) median measurement response with 1 σ and 2 σ percentiles (b) median averaging kernels

Figure 3.21: Measurement response and averaging kernels for temperature retrievals for Odin/SMR v3 at different altitudes for frequency mode 02.

Table 3.2: Pearson correlation and fit parameters of the old and new Odin/SMR retrievals for frequency mode 02, compared with collocated data from other instruments for the period 2003–2019.

Species	Instrument	SMR	corr.	slope	intercept	$ \langle \text{res.} \rangle $
O ₃	MIPAS (KIT)	v3	0.970	0.931	-0.067 ppm	0.724 ppm
		v2.x	0.922	0.794	-0.234 ppm	1.429 ppm
	MIPAS (ESA)	v3	0.973	0.931	-0.025 ppm	0.716 ppm
		v2.x	0.921	0.789	-0.212 ppm	1.439 ppm
MLS	v3	0.974	0.968	-0.011 ppm	0.603 ppm	
	v2.x	0.905	0.824	-0.195 ppm	1.337 ppm	
OSIRIS	v3	0.976	0.952	0.027 ppm	0.523 ppm	
	v2.x	0.913	0.793	-0.092 ppm	1.378 ppm	
SAGE III	v3	0.926	1.071	-0.102 ppm	0.400 ppm	
	v2.x	0.736	0.782	-0.124 ppm	0.780 ppm	
HNO ₃	MIPAS (KIT)	v3	0.956	0.978	0.101 ppb	0.873 ppb
		v2.x	0.814	0.996	-0.096 ppb	2.077 ppb
	MIPAS (ESA)	v3	0.958	1.003	0.158 ppb	0.869 ppb
		v2.x	0.810	1.028	-0.021 ppb	2.133 ppb
MLS	v3	0.739	0.643	0.717 ppb	2.366 ppb	
	v2.x	0.643	0.723	-0.502 ppb	2.963 ppb	
Temp.	MLS	v3	0.959	0.925	15.274 K	6.012 K
		v2.x	0.768	0.688	68.847 K	14.417 K

3.3 Frequency mode 08

3.3.1 Overview

Frequency mode 08 monitors two bands, 488.950–489.350 GHz and 488.350–488.750 GHz. Its main use is retrievals of water vapour in the lower stratosphere. O₃ is also retrieved. This mode showed considerable sideband leakage and served as the model for a new sideband correction that has been applied to all bands. Spectra from this observation mode are shown in Figure 3.22. Due to some miscommunication two different command macros were utilised for this mode resulting in slight different frequency coverage and different settings for the sideband filter.

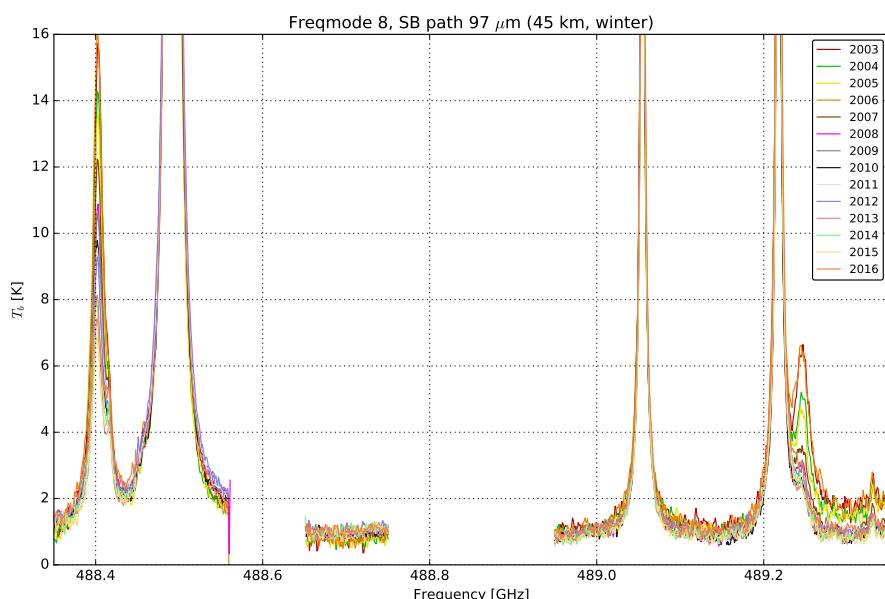


Figure 3.22: Annual median spectra for FM 08 for altitude interval 40–50 km at equatorial latitudes for the 97 μm sideband path during the arctic winter.

3.3.2 Comparison of retrieved profiles

3.3.2.1 O₃

The retrievals for O₃ have been compared with data from the MIPAS, MLS, OSIRIS and SAGE III instruments. Annual average differences to these instruments are shown in Figure 3.23. In Figure 3.24 individual retrievals for the instruments for the entire period are plotted against the retrievals from the new and old versions of the Odin/SMR processing chain. The results show a considerable improvement with the updated version of the processing compared to all considered instruments. However there are indications of a change in the last three years that requires further investigation. The over-all correlation and coherency is much better, though a systematic under estimation remains. Figure 3.25 suggests that the product is useful over the range 16–70 km with a vertical resolution of around 5 km.



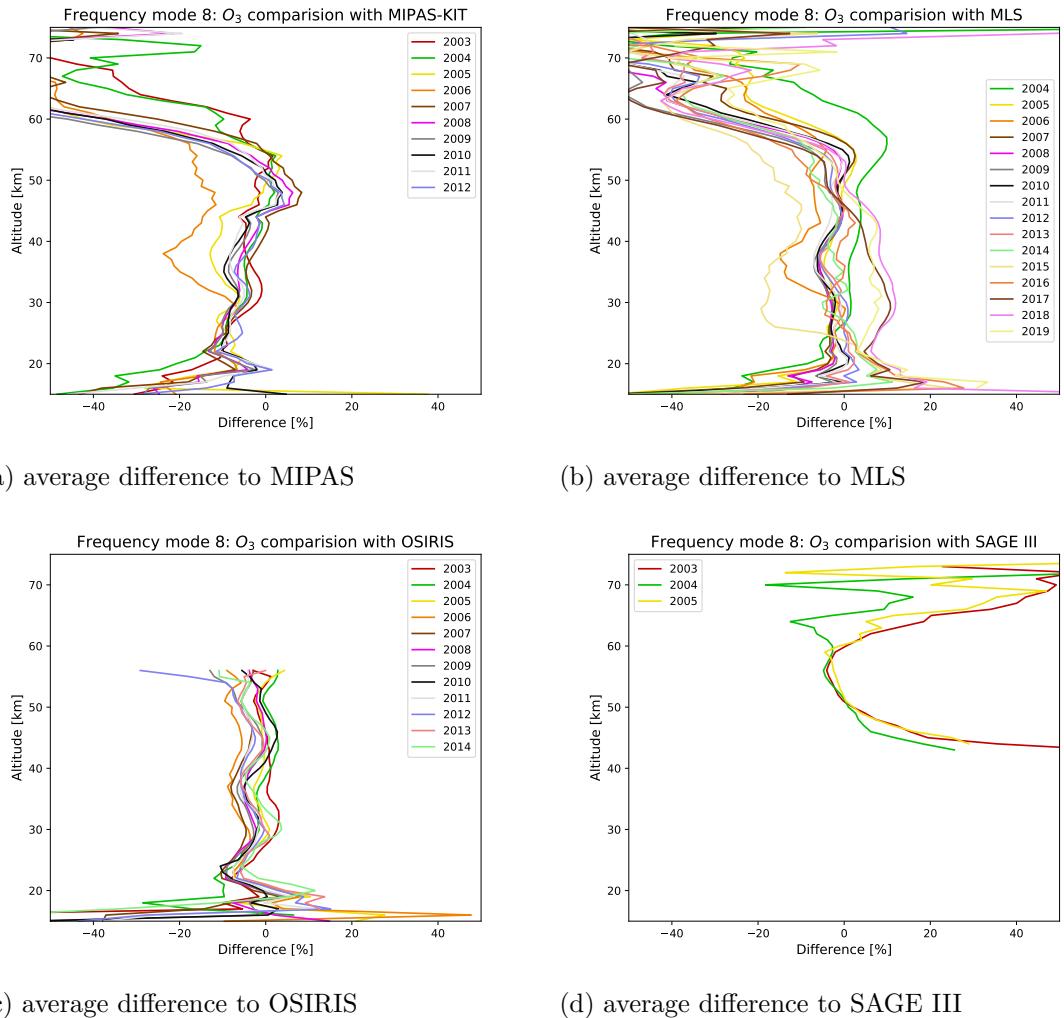


Figure 3.23: Average difference in percent between retrievals of O₃ from Odin/SMR v3 and collocated measurements from various instruments at different altitudes for frequency mode 08.

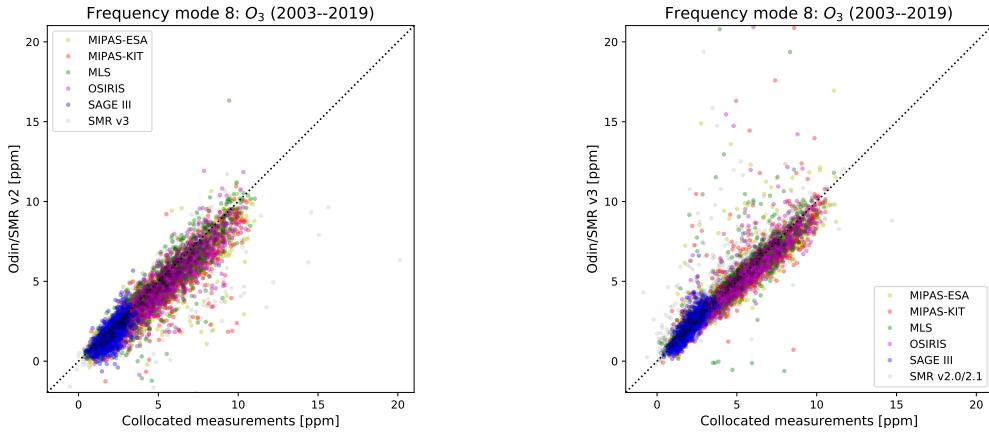

(a) correlation of collocated instruments with Odin/SMR v2.X
 (b) correlation of collocated instruments with Odin/SMR v3

Figure 3.24: Correlation between retrievals of O₃ using Odin/SMR versions 2.X and 3 and collocated measurements from various instruments for frequency mode 08.

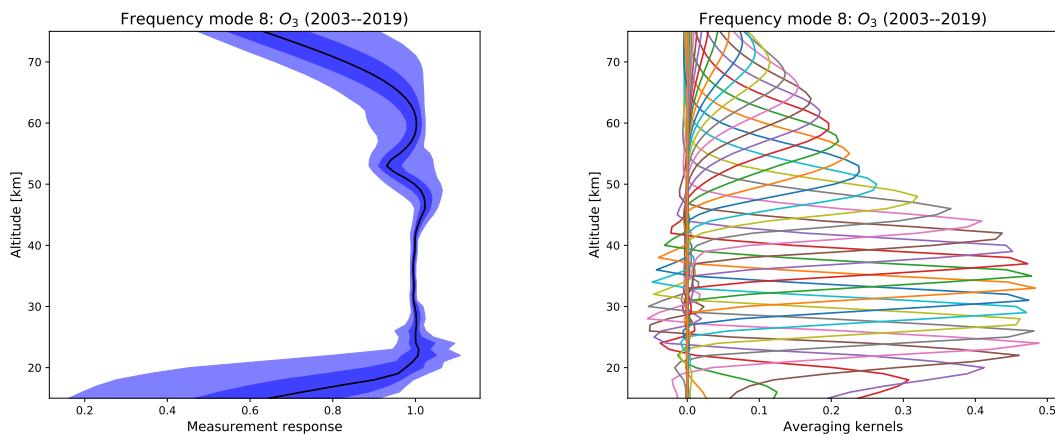

(a) median measurement response with 1 σ and 2 σ percentiles
 (b) median averaging kernels

Figure 3.25: Measurement response and averaging kernels for O₃ retrievals for Odin/SMR v3 at different altitudes for frequency mode 08.

3.3.2.2 H₂O


The retrievals for H₂O have been compared with data from the MIPAS, MLS and SAGE III instruments. Annual average differences to these instruments are shown in Figure 3.26. In Figure 3.28 individual retrievals for the instruments for the entire period are plotted against the retrievals from the new and old versions of the Odin/SMR processing chain. Though the results show a considerably improved coherency with the updated version of the processing compared to all considered instruments, the correlation is still poor, and the water content is still systematically underestimated, in particular for higher concentrations. Again there appears to have been a change in performance in the last few years. Figure 3.29 suggests that the product is useful over the range 19–78 km with a vertical resolution of around 4.5 km.

3.3.3 Discussion

The Pearson correlation between the Odin/SMR retrievals and the other instruments was calculated for the entire period for both versions of the processing chain. The results are summarised in Table 3.3, and show that the new algorithm is an improvement compared to all the instruments for all species used in this investigation. The improvement is considerable for both O₃ and H₂O. However there still seems to be a systematic underestimation of both products. It is unclear if this is due to spectroscopic problems or some sort of underestimation of the intensity. Spectroscopic data are taken from the HITRAN 12 database updated with the latest laboratory results; see Eriksson (2017).


Table 3.3: Pearson correlation and fit parameters of the old and new Odin/SMR retrievals for frequency mode 08, compared with collocated data from other instruments for the period 2003–2019.

Species	Instrument	SMR	corr.	slope	intercept	$ \langle \text{res.} \rangle $
O ₃	MIPAS (KIT)	v3	0.851	1.004	-0.207 ppm	1.582 ppm
		v2.x	0.911	0.872	-0.059 ppm	1.179 ppm
	MIPAS (ESA)	v3	0.843	0.956	-0.052 ppm	1.639 ppm
		v2.x	0.906	0.831	0.085 ppm	1.260 ppm
	MLS	v3	0.879	1.001	-1.130 ppm	1.378 ppm
		v2.x	0.878	0.884	0.031 ppm	1.238 ppm
	OSIRIS	v3	0.853	0.983	0.132 ppm	1.408 ppm
		v2.x	0.909	0.913	-0.091 ppm	1.089 ppm
H ₂ O	MIPAS (KIT)	v3	0.837	1.078	-0.144 ppm	0.566 ppm
		v2.x	0.737	0.975	-0.324 ppm	0.650 ppm
	MIPAS (ESA)	v3	0.426	0.596	1.851 ppm	2.026 ppm
		v2.x	0.432	0.377	2.816 ppm	1.662 ppm
	MLS	v3	0.428	0.437	2.892 ppm	2.250 ppm
		v2.x	0.455	0.320	3.146 ppm	1.854 ppm
	SAGE III	v3	0.490	0.702	0.870 ppm	2.094 ppm
		v2.x	0.411	0.486	2.022 ppm	1.907 ppm

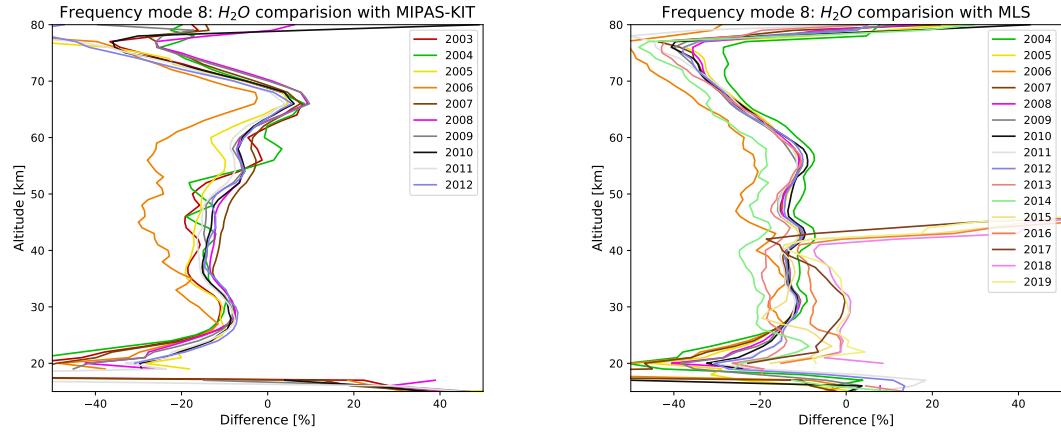


(a) average difference to MIPAS

(b) average difference to MLS

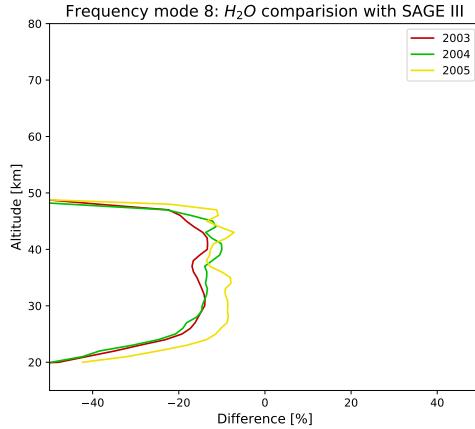


(c) average difference to SAGE III

Figure 3.26: Average difference in percent between retrievals of H_2O from Odin/SMR v3 and collocated measurements from various instruments at different altitudes for frequency mode 08.

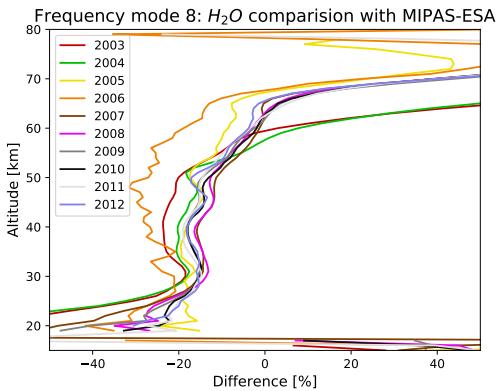


(a) average difference to MIPAS - ESA

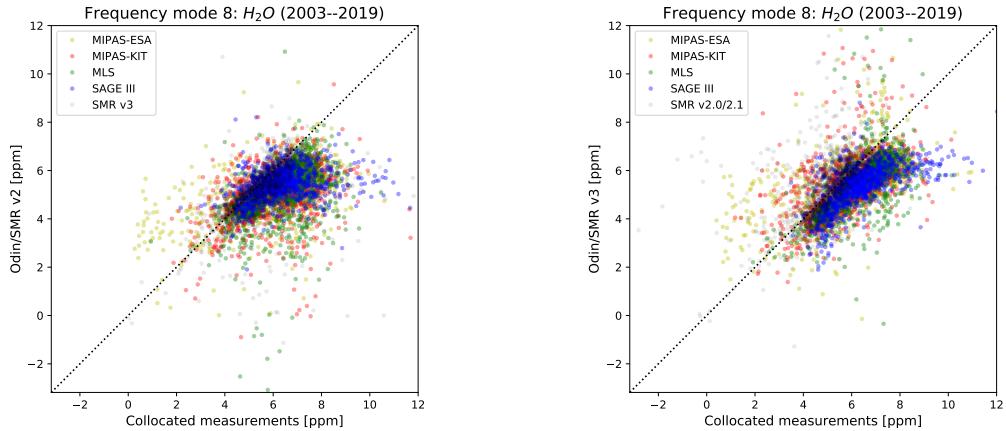

(a) correlation of collcated instruments with (b) correlation of collcated instruments with
Odin/SMR v2.X Odin/SMR v3

Figure 3.28: Correlation between retrievals of H_2O using Odin/SMR versions 2.X and 3 and collocated measurements from various instruments for frequency mode 08.

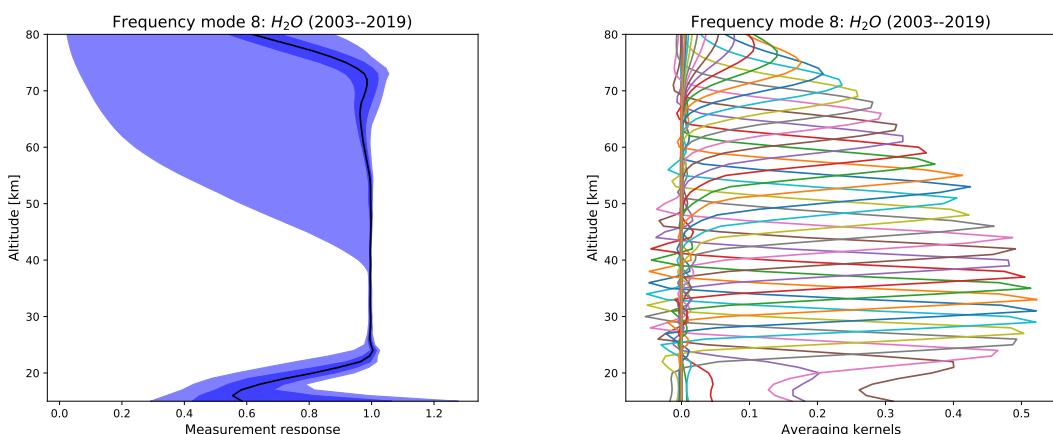

(a) median measurement response with 1σ and (b) median averaging kernels
 2σ percentiles

Figure 3.29: Measurement response and averaging kernels for H_2O retrievals for Odin/SMR v3 at different altitudes for frequency mode 08.

3.3.4 Conclusions

Based on the discussion above, retrievals based on frequency mode 08 can be used with confidence for the species O₃ while noting that the values may be underestimated by 5–10 %. The data should be used with some caution for H₂O but this requires more investigation.

3.4 Frequency mode 13

3.4.1 Overview

Frequency mode 13 monitors the band 556.598–557.398 GHz. Its main use is retrievals of H₂O and O₃. This is the strongest water vapour line available in the sub-mm wave spectrum and is used to reach the highest possible altitude particularly to study water vapour around the mesopause region. The line centre is saturated up to approximately 90 km and therefore temperatures can be derived throughout the mesosphere. This band and FM 19 remain problematic and have been subject to a dedicated study since the first version of this report to understand the effect of instrumental and other influences. Various instrumental uncertainties such as sideband filter values and non-linearity effects in the amplifiers and spectrometers have been investigated without any clear conclusion. However a value for the maximum suppression value different from that in the first version of the report was selected leading to some improvements in the agreement in both temperature and water vapour. Even the uncertainty in the pressure broadening coefficient has been revisited. Spectra from this observation mode are shown in Figure 3.30.

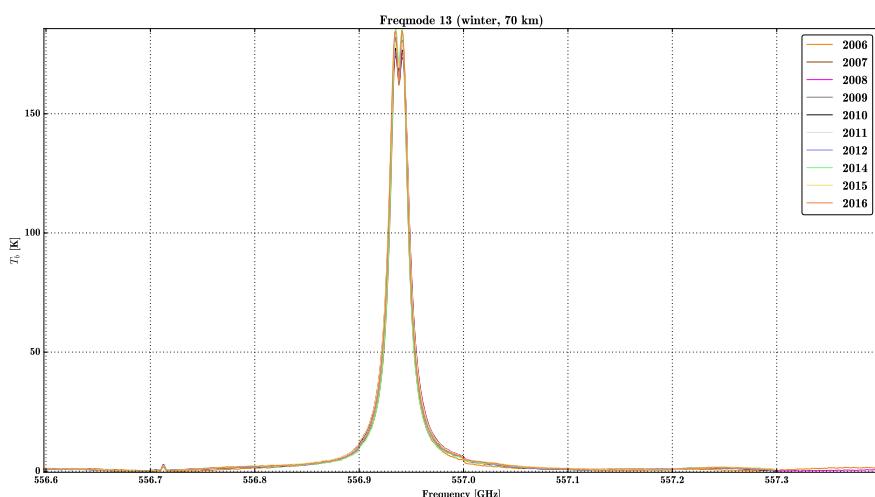


Figure 3.30: Annual median spectra for FM 13 for altitude interval 65–75 km at equatorial latitudes during the arctic winter.

3.4.2 Comparison of retrieved profiles

3.4.2.1 O₃

The retrievals for O₃ have been compared with data from the MIPAS, MLS and OSIRIS instruments. Annual average differences to these instruments are shown in Figure 3.31. In Figure 3.32 individual retrievals for the instruments for the entire period are plotted against the retrievals from the new and old versions of the Odin/SMR processing chain. The results show a better overall coherency with the updated version of the processing compared to all considered instruments, but a systematic under estimation of the concentrations has been introduced. The reason for this is that a previously introduced (ver 2.1) empirical correction to the intensities has been removed since there was no physical basis for its inclusion. We suspect that some sort of non-linearity is causing the underestimation.

Investigations of this band are continuing. Above about 65 km diurnal variability in the ozone concentration introduce problems when comparing with instruments on different platforms. We assume that this is the main reason for the differences at such altitudes. Figure 3.33 suggests that the product is useful over the range 44–80 km with a vertical resolution of around 6 km.


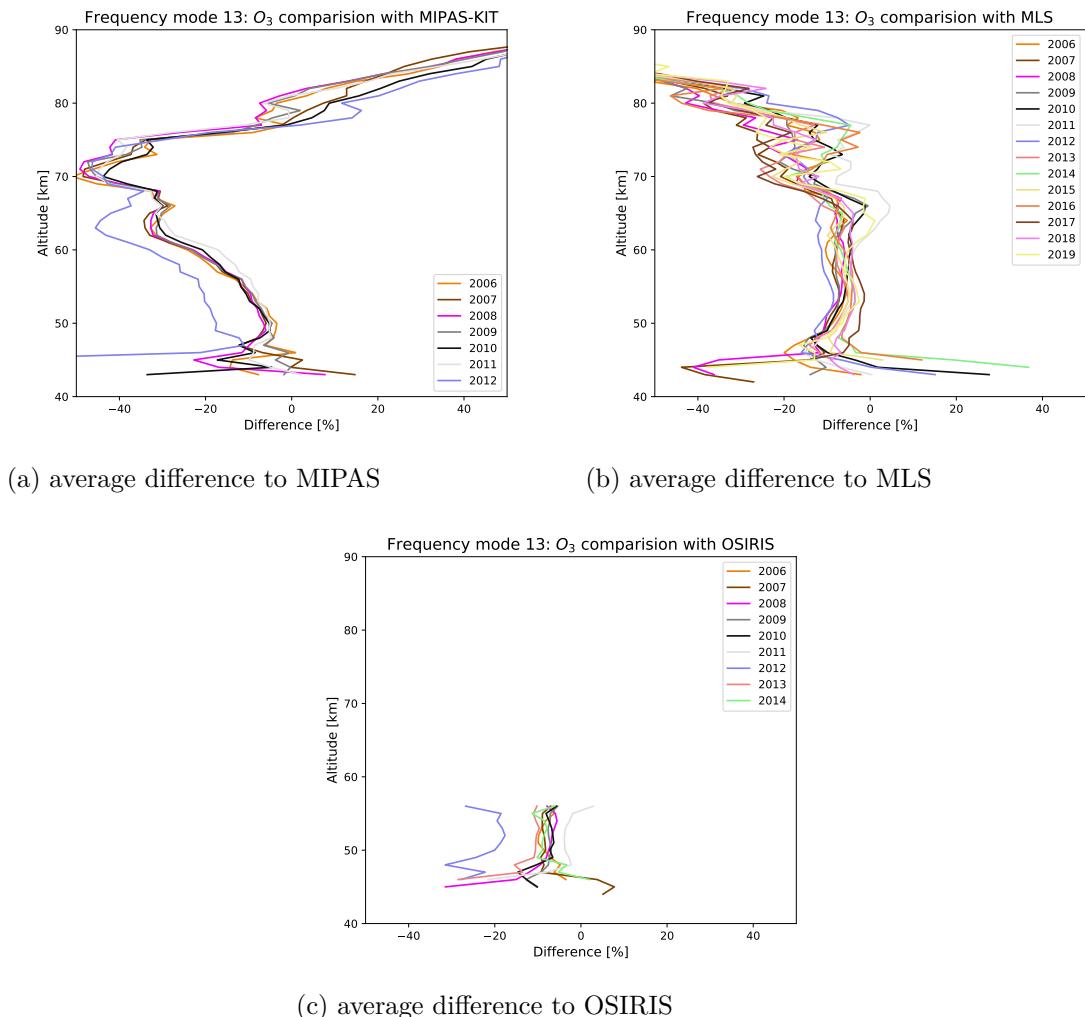


Figure 3.31: Average difference in percent between retrievals of O_3 from Odin/SMR v3 and collocated measurements from various instruments at different altitudes for frequency mode 13.


3.4.2.2 H_2O

The retrievals for H_2O have been compared with data from the MIPAS and MLS instruments. SAGE does not provide reliable water vapour profiles above 33km [Rydberg et al. \(2016b\)](#). Annual average differences to these instruments are shown in Figure 3.34. In Figure 3.35 individual retrievals for the instruments for the entire period are plotted against the retrievals from the new and old versions of the Odin/SMR processing chain. The results show a slightly improved overall coherency with the updated version of the processing compared to both considered instruments, but a systematic under estimation

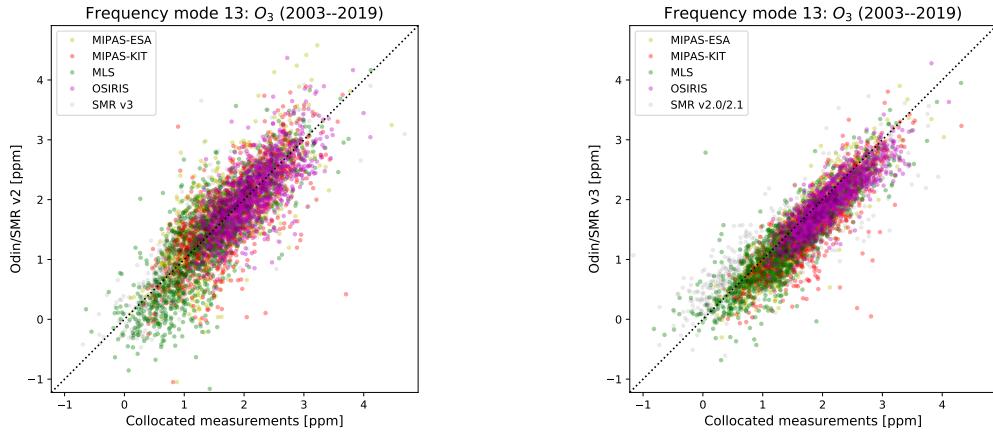

(a) correlation of collocated instruments with Odin/SMR v2.X
 (b) correlation of collocated instruments with Odin/SMR v3

Figure 3.32: Correlation between retrievals of O₃ using Odin/SMR versions 2.X and 3 and collocated measurements from various instruments for frequency mode 13.

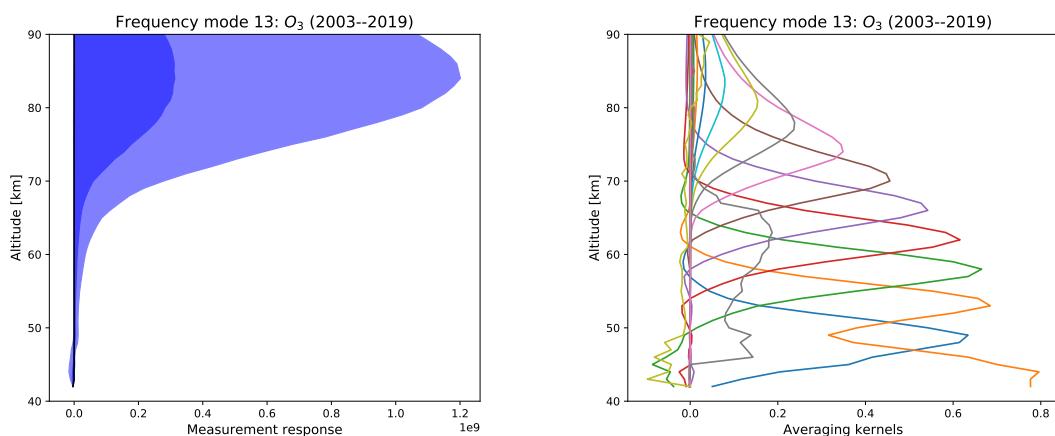

(a) median measurement response with 1 σ and 2 σ percentiles
 (b) median averaging kernels

Figure 3.33: Measurement response and averaging kernels for O₃ retrievals for Odin/SMR v3 at different altitudes for frequency mode 13.

of the concentrations has been introduced, and the correlation, in particular with MIPAS, remains poor. This would suggest that the MIPAS values are unreliable for this data product. (To be confirmed with KIT) Figure 3.36 suggests that the product is useful over the range 44–110 km with a vertical resolution of around 4.5 km.

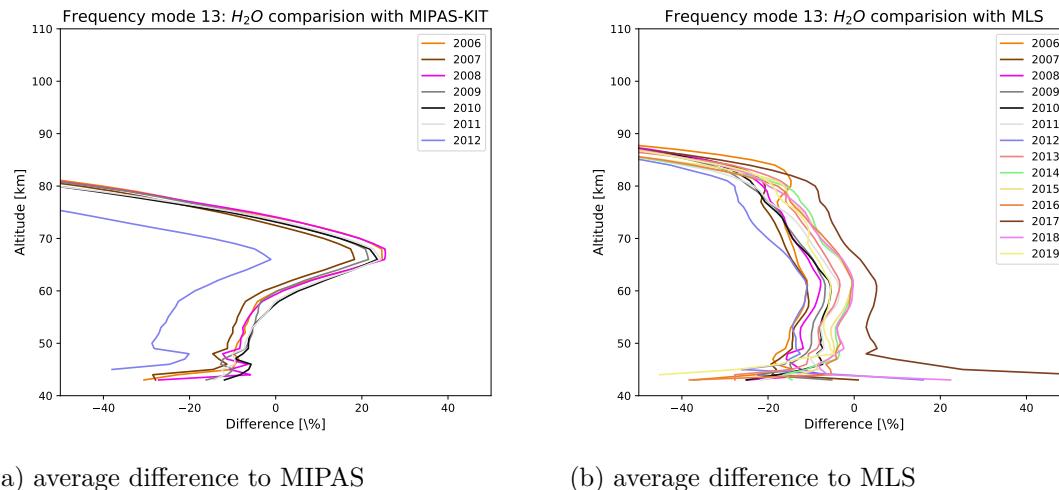


Figure 3.34: Average difference in percent between retrievals of H_2O from Odin/SMR v3 and collocated measurements from various instruments at different altitudes for frequency mode 13.


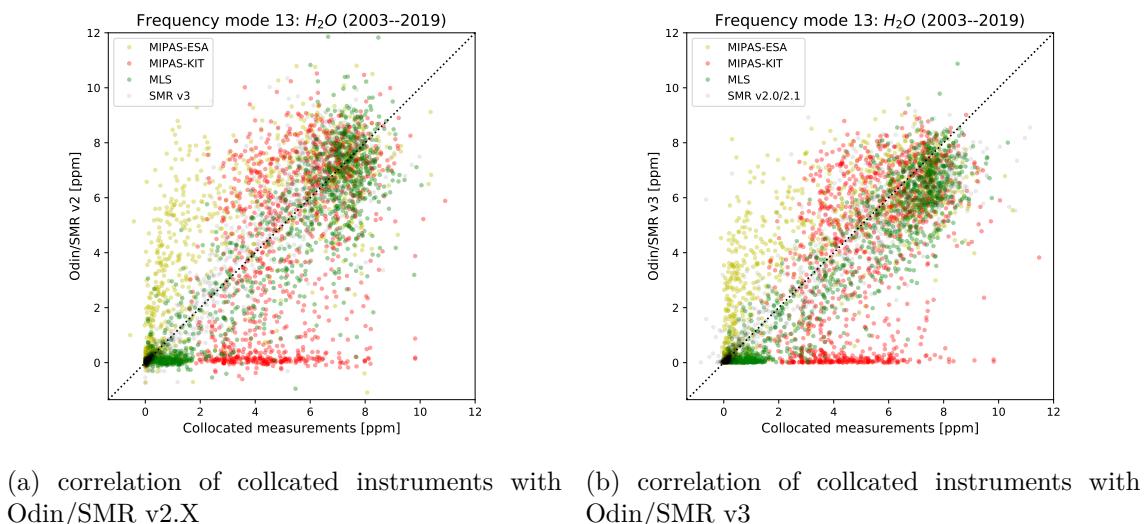


Figure 3.35: Correlation between retrievals of H_2O using Odin/SMR versions 2.X and 3 and collocated measurements from various instruments for frequency mode 13.

3.4.2.3 Temperature

The retrievals for temperature have been compared with data from the MLS instrument. Annual average differences to this instrument are shown in Figure 3.37. In Figure 3.38 individual retrievals from MLS for 2003–2019 are plotted against the retrievals from the

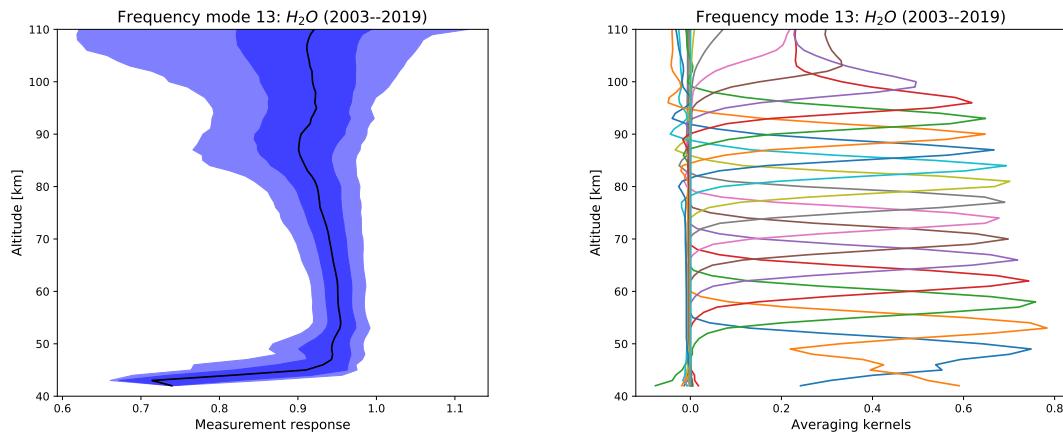

(a) median measurement response with 1 σ and 2 σ percentiles (b) median averaging kernels

Figure 3.36: Measurement response and averaging kernels for H₂O retrievals for Odin/SMR v3 at different altitudes for frequency mode 13.

new and old versions of the Odin/SMR processing chain. The results show little or no improvement with the updated version of the processing. Whereas with the previous version of the system, the temperature was systematically over estimated, a small under estimation of the temperature is now seen. This is a result of the removal of the arbitrary scaling factor. Figure 3.39 suggests that the product is useful over the range 44–95 km with a vertical resolution of around 5.5 km.

3.4.3 Discussion

The Pearson correlation between the Odin/SMR retrievals and the other instruments was calculated for the entire period for both versions of the processing chain. The results are summarised in Table 3.4, and show that the new algorithm shows little or no improvement compared to all the instruments for the species used in this investigation.

3.4.4 Conclusions

Based on the discussion above, retrievals based on frequency mode 13 should be used with caution for both O₃ and H₂O. The temperature retrievals, on the other hand, appear reliable albeit with a cold bias of 3–5 K. For water vapour he comparisons with MLS seem to suggest a consistent -20 % bias.

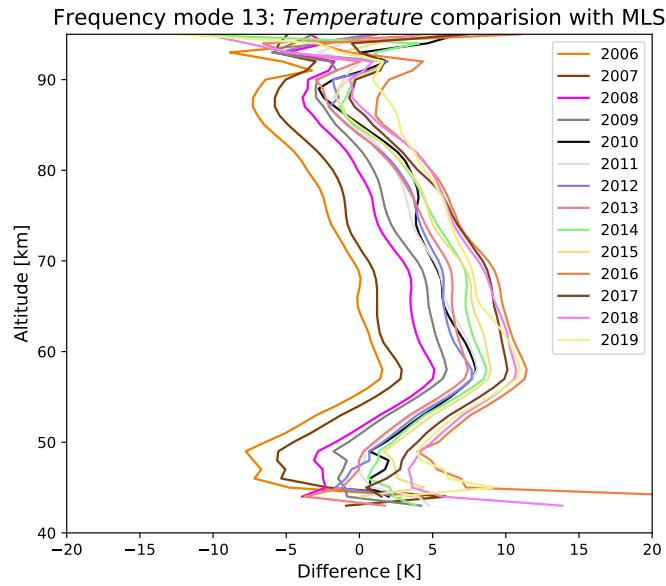


Figure 3.37: Average difference in K between retrievals of temperature from Odin/SMR v3 and collocated measurements from MLS at different altitudes.


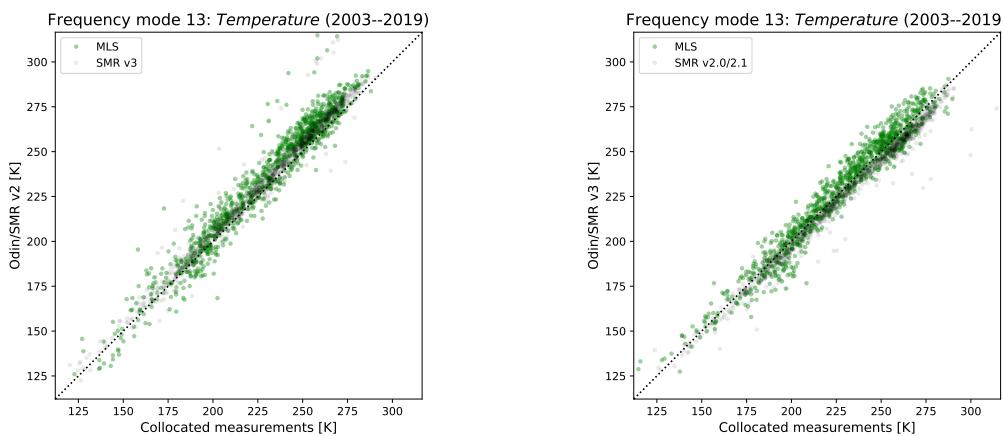


Figure 3.38: Correlation between retrievals of temperature using Odin/SMR versions 2.X and 3 and collocated measurements from various instruments.

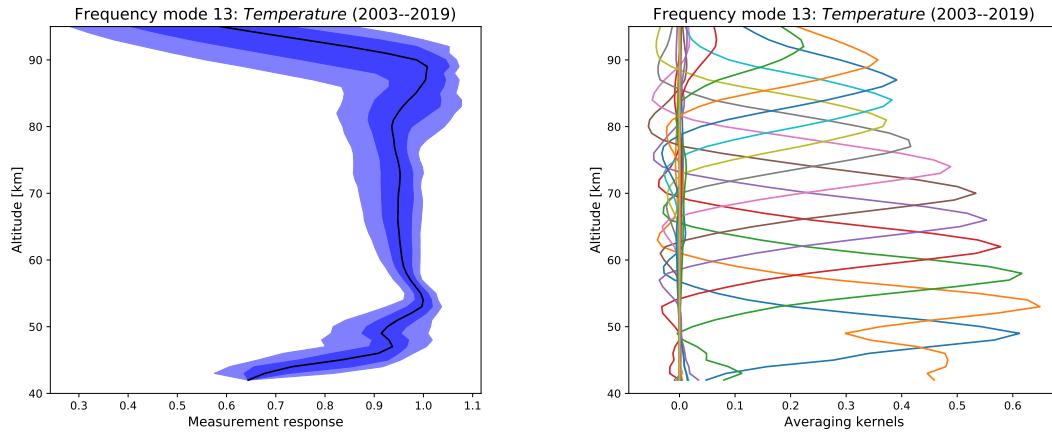

(a) median measurement response with 1σ and 2σ percentiles (b) median averaging kernels

Figure 3.39: Measurement response and averaging kernels for temperature retrievals for Odin/SMR v3 at different altitudes for frequency mode 13.

Table 3.4: Pearson correlation and fit parameters of the old and new Odin/SMR retrievals for frequency mode 13, compared with collocated data from other instruments for the period 2003–2019.

Species	Instrument	SMR	corr.	slope	intercept	$ \langle \text{res.} \rangle $
O3	MIPAS (KIT)	v3	0.643	0.470	0.503 ppm	0.801 ppm
		v2.x	0.750	0.886	0.128 ppm	0.489 ppm
	MIPAS (ESA)	v3	0.750	0.696	0.282 ppm	0.560 ppm
		v2.x	0.788	0.905	0.201 ppm	0.451 ppm
H ₂ O	MLS	v3	0.436	0.262	0.658 ppm	1.183 ppm
		v2.x	0.829	0.979	-0.083 ppm	0.500 ppm
OSIRIS	v3	0.845	0.845	0.176 ppm	0.332 ppm	
	v2.x	0.765	0.884	0.207 ppm	0.372 ppm	
H ₂ O	MIPAS (KIT)	v3	0.432	0.706	-0.376 ppm	3.254 ppm
		v2.x	0.445	0.823	-0.187 ppm	3.086 ppm
	MIPAS (ESA)	v3	0.824	0.803	1.061 ppm	1.821 ppm
		v2.x	0.787	0.842	1.508 ppm	2.275 ppm
Temp.	MLS	v3	0.923	0.935	-0.362 ppm	1.345 ppm
		v2.x	0.897	0.964	-0.448 ppm	1.534 ppm
Temp.	MLS	v3	0.968	1.029	-2.859 K	8.773 K
		v2.x	0.965	1.043	-3.836 K	11.260 K

3.5 Frequency mode 19

3.5.1 Overview

Frequency mode 19 monitors the band 556.598–557.398 GHz. Its main use is retrievals of H₂O and O₃. FM 19 is an alternative mode for measuring water vapour in the mesosphere. As with FM 13 we suspect some non-linearity problems that we have not yet managed to track down. Indications of this are the underestimation of temperature and water vapour itself. Spectra from this observation mode are shown in Figure 3.40.

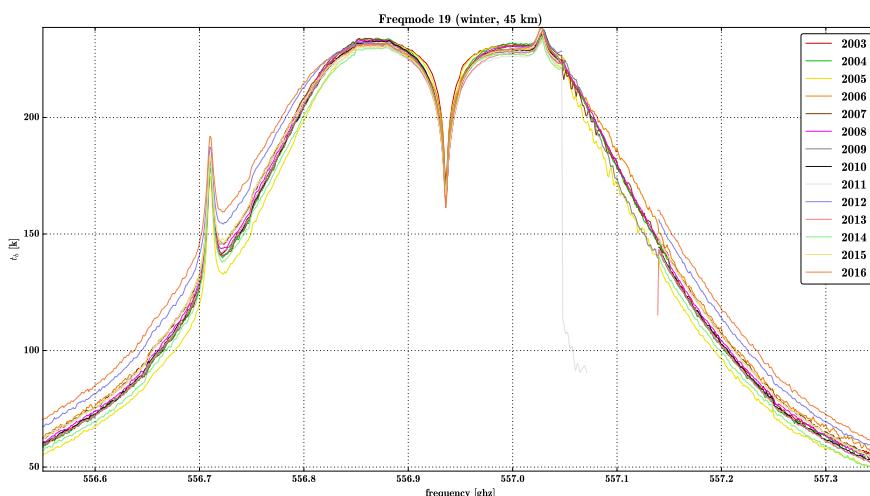


Figure 3.40: Annual median spectra for FM 19 for altitude interval 42–48 km at equatorial latitudes during the arctic winter.

3.5.2 Comparison of retrieved profiles

3.5.2.1 O₃

The retrievals for O₃ have been compared with data from the MIPAS, MLS, OSIRIS and SAGE III instruments. Annual average differences to these instruments are shown in Figure 3.41. In Figure 3.42 individual retrievals for the instruments for the entire period are plotted against the retrievals from the new and old versions of the Odin/SMR processing chain. The results show a better over-all coherency with the updated version of the processing compared to SAGE III and OSIRIS, but worse correlation with MIPAS and MLS, and a systematic under estimation of the concentrations remains compared to all considered instruments. Above about 65 km diurnal variability in the ozone concentration introduces problems when comparing with instruments on different platforms. We assume that this is the main reason for the differences at such altitudes. Figure 3.43 suggests that the product is useful over the range 44–80 km with a vertical resolution of around 6 km.

3.5.2.2 H₂O

The retrievals for H₂O have been compared with data from the MIPAS and MLS instruments. Annual average differences to these instruments are shown in Figure 3.44. In Figure 3.45 individual retrievals for the instruments for the entire period are plotted

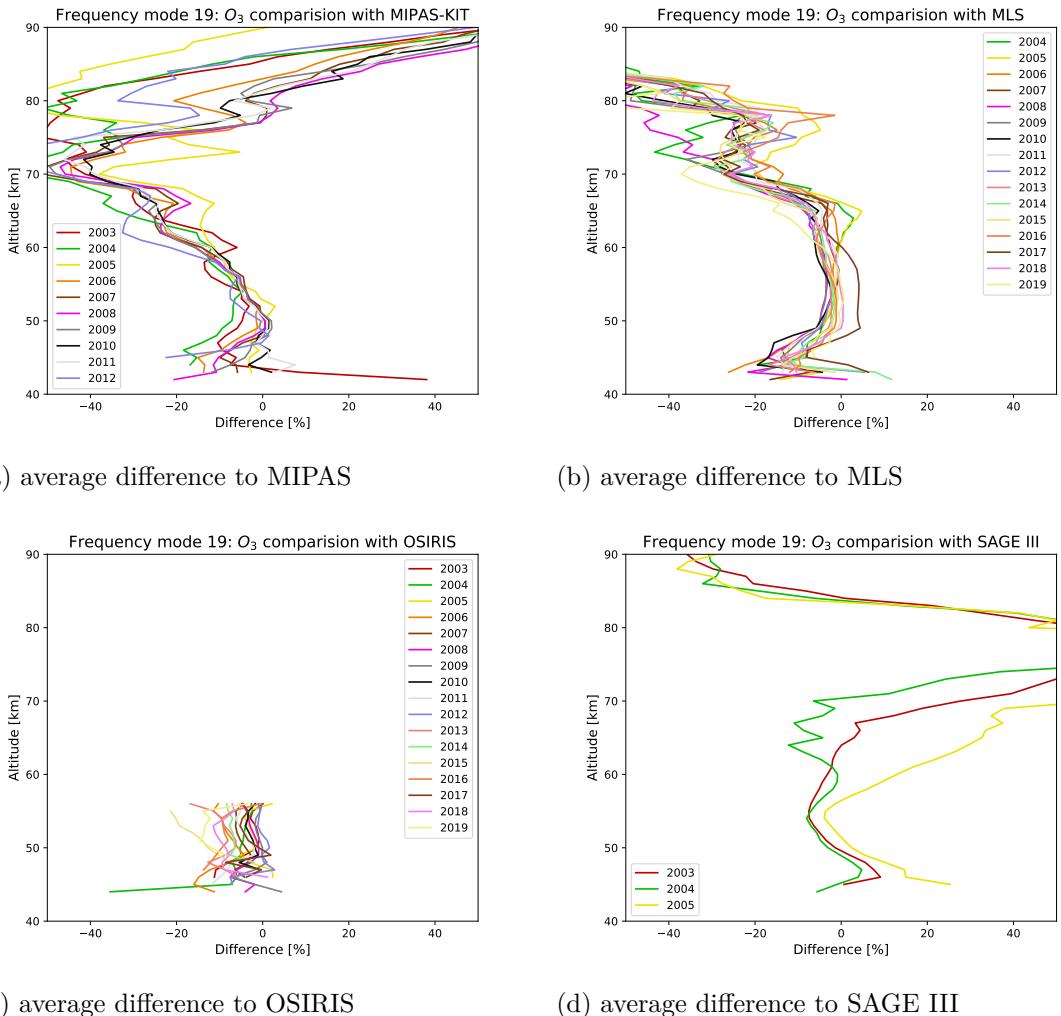


Figure 3.41: Average difference in percent between retrievals of O₃ from Odin/SMR v3 and collocated measurements from various instruments at different altitudes for frequency mode 19.


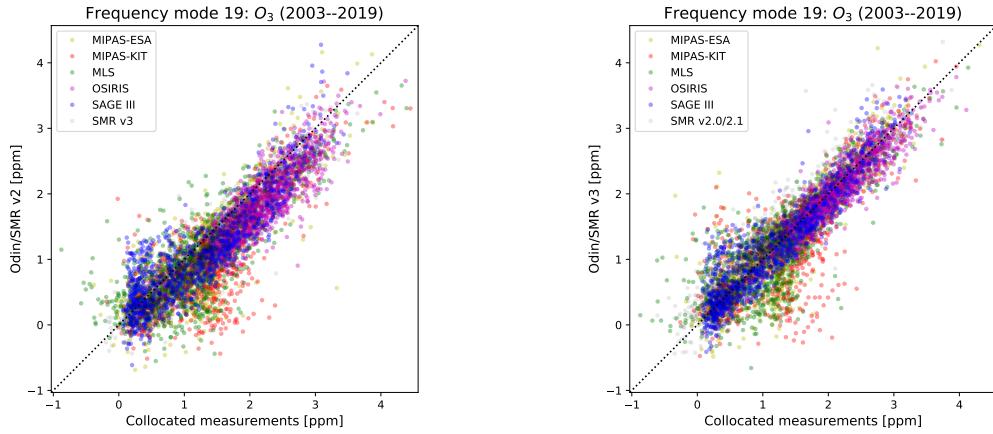


Figure 3.42: Correlation between retrievals of O_3 using Odin/SMR versions 2.X and 3 and collocated measurements from various instruments for frequency mode 19.

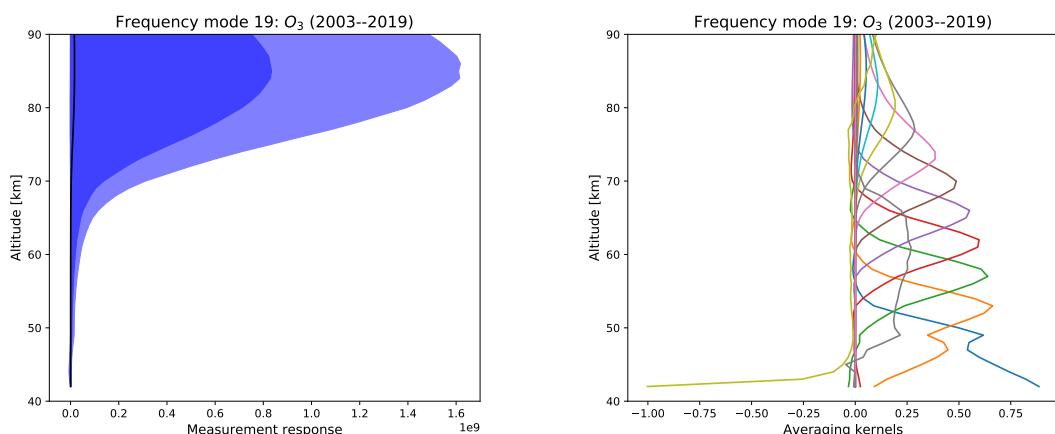


(a) median measurement response with 1σ and
 2σ percentiles

(b) median averaging kernels

Figure 3.43: Measurement response and averaging kernels for O_3 retrievals for Odin/SMR v3 at different altitudes for frequency mode 19.

against the retrievals from the new and old versions of the Odin/SMR processing chain. The results show a slightly improved over-all coherency with the updated version of the processing compared to both considered instruments, but a systematic under estimation of the concentrations has been introduced. Comparisons with MLS suggest a -20 % bias as with FM13 but with a increasing bias with altitude. The MIPAS product used seems to be unreliable at these altitudes


The SAGE III instrument also measures H₂O, but there are too few collocated measurements with frequency mode 19 for a relevant analysis. Figure 3.46 suggests that the product is useful over the range 44–110 km with a vertical resolution of around 4 km.

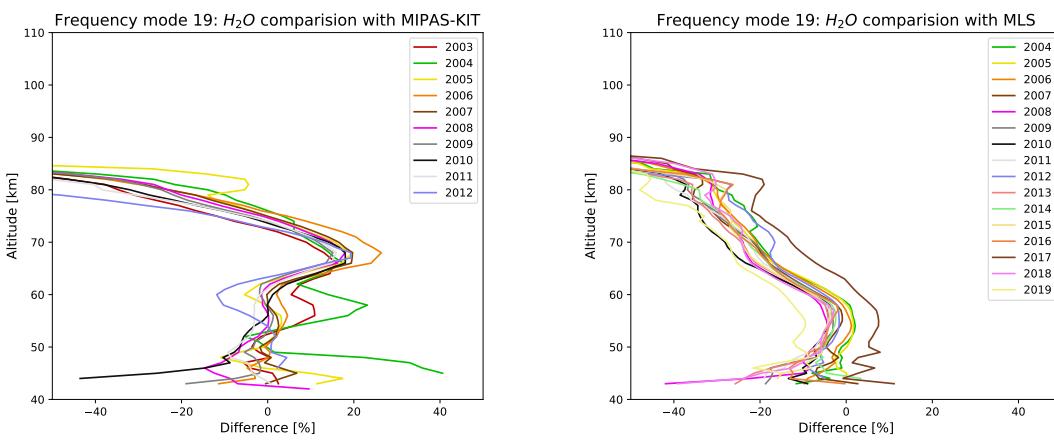

(a) average difference to MIPAS

(b) average difference to MLS


Figure 3.44: Average difference in percent between retrievals of H₂O from Odin/SMR v3 and collocated measurements from various instruments at different altitudes for frequency mode 19.

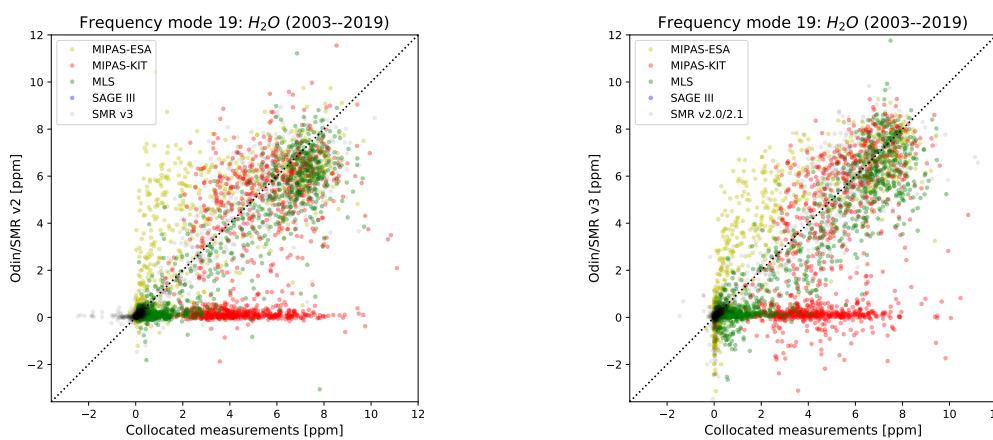

(a) correlation of collocated instruments with Odin/SMR v2.X

(b) correlation of collocated instruments with Odin/SMR v3

Figure 3.45: Correlation between retrievals of H₂O using Odin/SMR versions 2.X and 3 and collocated measurements from various instruments for frequency mode 19.

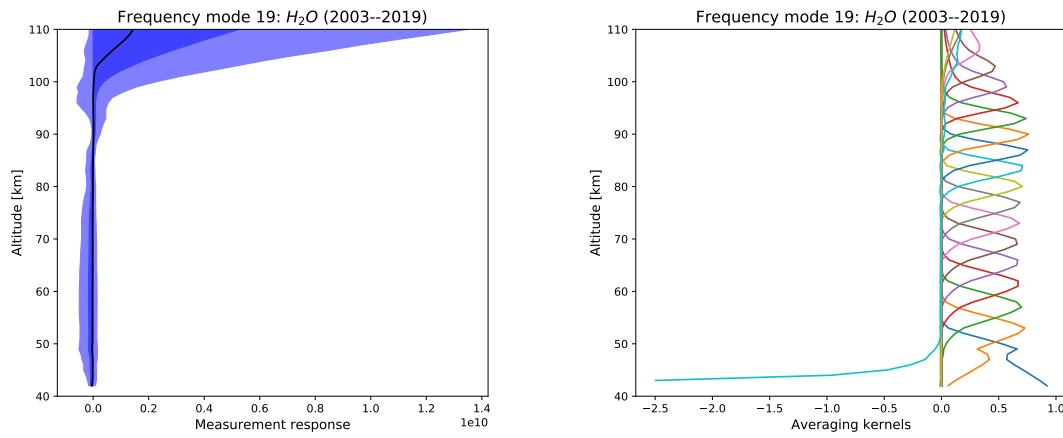

(a) median measurement response with 1 σ and 2 σ percentiles (b) median averaging kernels

Figure 3.46: Measurement response and averaging kernels for H₂O retrievals for Odin/SMR v3 at different altitudes for frequency mode 19.

3.5.2.3 Temperature

The retrievals for temperature have been compared with data from the MLS instrument. Annual average differences to this instrument are shown in Figure 3.47. In Figure 3.38 individual retrievals from MLS for the entire period are plotted against the retrievals from the new and old versions of the Odin/SMR processing chain. The results show a little or no improvement with the updated version of the processing. Whereas with the previous version of the system, the temperature was under estimated for lower temperatures and over estimated for higher, and a small systematic under estimation of the temperature is still seen. Figure 3.49 suggests that the product is useful over the range 44–95 km with a vertical resolution of around 5 km.

3.5.3 Discussion

The Pearson correlation between the Odin/SMR retrievals and the other instruments was calculated for the entire period for both versions of the processing chain. The results are summarised in Table 3.5, and show that the new algorithm is a general improvement compared to all the instruments for all species used in this investigation. Specifically the improvement is largest for water vapour and temperature while the secondary ozone product shows some variability. The agreement is best with OSIRIS over a limited height region. This is to be expected since they are on the same platform. For MLS and MIPAS diurnal variability biases the results. The improvement is considerable for both O₃ and H₂O.

3.5.4 Conclusions

Based on the discussion above, retrievals based on frequency mode 19 should be used with caution for both O₃ and H₂O, but can be used with confidence for temperature retrievals.



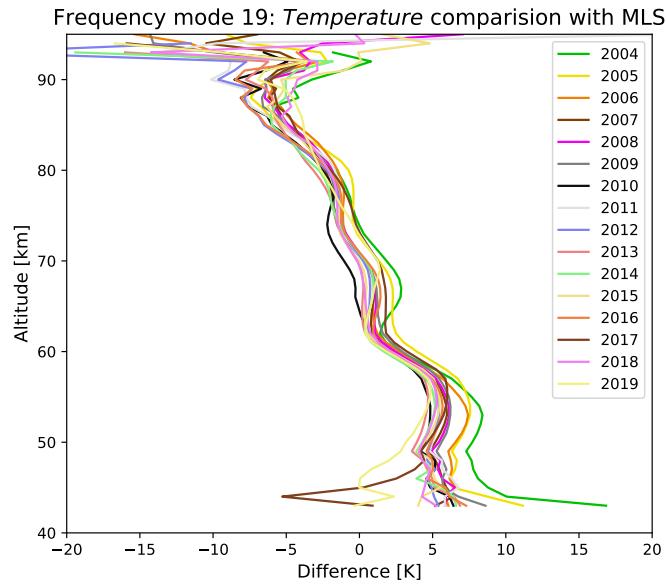


Figure 3.47: Average difference in K between retrievals of temperature from Odin/SMR v3 and collocated measurements from MLS at different altitudes.

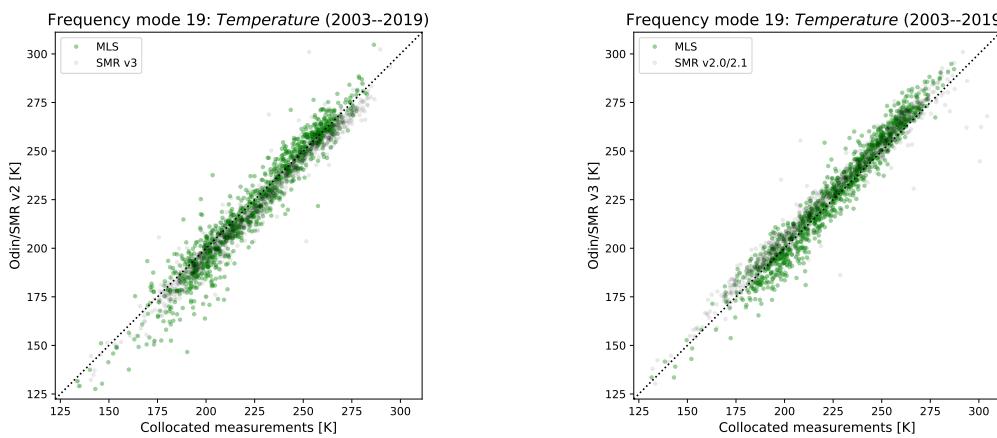

(a) correlation of collocated instruments with Odin/SMR v2.X (b) correlation of collocated instruments with Odin/SMR v3

Figure 3.48: Correlation between retrievals of temperature using Odin/SMR versions 2.X and 3 and collocated measurements from various instruments.

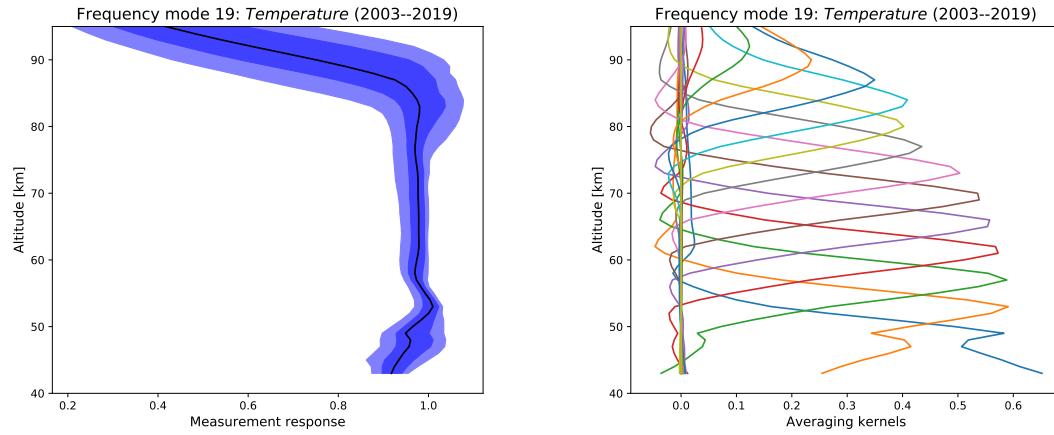

(a) median measurement response with 1σ and 2σ percentiles (b) median averaging kernels

Figure 3.49: Measurement response and averaging kernels for temperature retrievals for Odin/SMR v3 at different altitudes for frequency mode 19.

Table 3.5: Pearson correlation and fit parameters of the old and new Odin/SMR retrievals for frequency mode 19, compared with collocated data from other instruments for the period 2003–2019.

Species	Instrument	SMR	corr.	slope	intercept	$ \langle \text{res.} \rangle $
O ₃	MIPAS (KIT)	v3	0.678	0.492	0.505 ppm	0.780 ppm
		v2.x	0.800	0.810	-0.099 ppm	0.591 ppm
	MIPAS (ESA)	v3	0.787	0.739	0.275 ppm	0.523 ppm
		v2.x	0.845	0.861	-0.070 ppm	0.479 ppm
MLS	v3	0.476	0.292	0.655 ppm	1.150 ppm	
	v2.x	0.810	0.767	0.089 ppm	0.533 ppm	
OSIRIS	v3	0.883	0.894	0.161 ppm	0.257 ppm	
	v2.x	0.847	0.878	-0.042 ppm	0.422 ppm	
SAGE III	v3	0.895	0.918	0.092 ppm	0.363 ppm	
	v2.x	0.885	0.819	0.068 ppm	0.395 ppm	
H ₂ O	MIPAS (KIT)	v3	0.444	0.720	-1.153 ppm	3.699 ppm
		v2.x	0.411	0.635	-0.556 ppm	3.590 ppm
	MIPAS (ESA)	v3	0.867	0.937	0.525 ppm	1.536 ppm
		v2.x	0.819	0.839	0.785 ppm	1.762 ppm
MLS	v3	0.926	0.911	-0.569 ppm	1.442 ppm	
	v2.x	0.920	0.884	-0.416 ppm	1.451 ppm	
Temp.	MLS	v3	0.976	1.085	-18.131 K	7.551 K
		v2.x	0.965	1.084	-21.231 K	8.798 K

Chapter 4 | Conclusions

4.1 General comments

Table 4.1 shows an overview of the characteristics of the main data products from the updated Odin/SMR processing chain for the frequency modes investigated in Chapter 3. The vertical coverage has been defined as the altitude interval where the *measurement response* for the retrievals is > 0.8 . The vertical resolution and precision are calculated from the $\pm 2\sigma$ percentiles of the *full widths at half maximum* of the averaging kernels and the *total error* as defined in Eriksson (2017) respectively.

The results presented in Table 4.1 should be compared with the results for the old processing chain, presented in Tables 2.1 and 2.2.

Table 4.1: Characteristics of Odin/SMR Level2 main data products.

Product	Frequency [GHz]	Vertical coverage	Vertical resolution	Precision
O ₃	501.5 (FM 01)	19–53 km	5.3–5.5 km	0.70–0.85 ppmv
ClO	501.3 (FM 01)	18–58 km	5.3–5.6 km	0.07–0.08 ppbv
N ₂ O	502.3 (FM 01)	15–62 km	4.4–5.6 km	5.00–6.10 ppbv
O ₃	544.9 (FM 02)	17–77 km	2.9–4.9 km	0.18–0.26 ppmv
HNO ₃	544.4 (FM 02)	20–61 km	5.0–7.2 km	0.24–0.28 ppbv
Temperature	544.9 (FM 02)	21–64 km	7.5–7.9 km	1.13–2.18 K
O ₃	489.2 (FM 08)	16–71 km	4.1–6.0 km	0.29–0.39 ppmv
H ₂ O	489.5 (FM 08)	19–78 km	4.0–4.7 km	0.32–0.55 ppmv
O ₃	556.9 (FM 13)	44–80 km	6.1–6.7 km	0.19–0.24 ppmv
H ₂ O	556.7 (FM 13)	44–110 km	4.3–4.8 km	0.06–0.33 ppbv
Temperature	556.9 (FM 13)	44–95 km	5.3–5.6 km	1.85–2.73 K
O ₃	556.9 (FM 19)	43–81 km	5.8–6.6 km	0.19–0.24 ppmv
H ₂ O	556.7 (FM 19)	43–109 km	4.1–4.4 km	0.13–0.26 ppbv
Temperature	556.9 (FM 19)	43–93 km	5.2–5.5 km	1.72–2.65 K

4.2 Recomendations

4.2.1 Ozone

The best ozone product for general use is that from FM 02. The new product is in much better agreement with other instruments and does not seem to show any temporal drifts although a thorough analysis of drifts has not yet been attempted. The other ozone

products show some biases but could be used in conjunction with simultaneously measured products if account is taken of this.

4.2.2 Chlorine Monoxide

The ClO product should be reliable until 2009 and after January 2018. Unfortunately a gradually deteriorating instrument malfunction has disturbed the intervening period. We will attempt to correct for this as soon as possible. This will require some effort and will probably not be possible within the scope of the project.

4.2.3 Water vapour

Water vapour continues to be a difficult product. the FM 08 product has improved and is stable over time although shows a 15 % low bias compared to MLS. For the upper stratosphere and mesosphere FM 13 appears to be the best product, but also shows a small bias of around 15 % and some variability above 70 km that needs further investigation.

4.2.4 Temperature

FM 02 provides stratospheric temperatures with a possible increasing bias with altitude. There does not appear to be any systematic drift with time. For higher altitudes FM 13 can be used with knowledge of a possible cold bias of 3–5 K

Bibliography

- E. Dupuy, J. Urban, P. Ricaud, E. Le Flochmoën, N. Lautié, D. Murtagh, J. de La Noë, L. El Amraoui, P. Eriksson, P. Forkman, U. Frisk, F. Jegou, C. Jimenez, and M. Olberg. Strato-mesospheric measurements of carbon monoxide with the Odin Sub-Millimetre Radiometer: Retrieval and first results. *Geophys. Res. Lett.*, 31:L20101, 2004. doi: 10.1029/2004GL020558.
- P. Eriksson. Odin/SMR Algorithm Theoretical Basis Document – Level 2 processing. Technical report, Department of Space, Earth and Environment, Chalmers University of Technology, 2017.
- P. Eriksson and J. Urban. Post launch characterisation of Odin-SMR sideband filter properties. Technical report, Chalmers University of Technology, 2006.
- U. Frisk, M. Hagström, J. Ala-Laurinaho, S. Andersson, J-C Berges, J-P Chabaud, M. Dahlgren, A. Emrich, H-G Florén, G. Florin, M. Fredrixon, T. Gaier, R. Haas, T. Hirvonen, Å. Hjalmarsson, B. Jakobsson, P. Jukkala, P-S Kildal, E. Kollberg, J. Lassing, A. Lecacheux, P. Lehikoinen, A. Lehto, J. Mallat, C. Marty, D. Michet, J. Narbonne, M. Nexon, M. Olberg, A. O. H. Olofsson, G. Olofsson, A. Origné, M. Petersson, P. Piironen, R. Pons, D. Pouliquen, I. Ristorcelli, C. Rosolen, G. Rouaix, A.V. Räisänen, G. Serra, F. Sjöberg, L. Stenmark, S. Torchinsky, J. Tuovinen, C. Ullberg, E. Vinterhav, N. Wadefalk, H. Zirath, P. Zimmermann, and R. Zimmermann. The Odin satellite I. Radiometer design and test. *A&A*, 402(3):L27–L34, 2003. doi: <http://dx.doi.org/10.1051/0004-6361:20030335>.
- D. Murtagh, U. Frisk, F. Merino, M. Ridal, A. Jonsson, J. Stegman, G. Witt, P. Eriksson, C. Jiménez, G. Megie, J. de La Noë, P. Ricaud, P. Baron, J. R. Pardo, A. Hauchcorne, E. J. Llewellyn, D. A. Degenstein, R. L. Gattinger, N. D. Lloyd, W. F. J. Evans, I. C. McDade, C.S. Haley, C. Sioris, C. von Savigny, B. H. Solheim, J. C. McConnell, K. Strong, E. H. Richardson, G. W. Leppelmeier, E. Kyrölä, H. Auvinen, and L. Oikarinen. An overview of the Odin atmospheric mission. *Can. J. Phys.*, 80:309–319, 2002.
- K. Pérot, P. Eriksson, and D. Murtagh. Odin/SMR L2 data – format and overview. Technical report, Department of Space, Earth and Environment, Chalmers University of Technology, 2017.
- B. Rydberg, P. Eriksson, J. Petersson, A. Skyman, and D. Murtagh. Input/output data definition document: Level2 processor. Technical report, Department of Space, Earth and Environment, Chalmers University of Technology, 2016a.
- B. Rydberg, P. Eriksson, A. Skyman, and D. Murtagh. Odin/SMR Verification Dataset: Technical Note. Technical report, Chalmers University of Technology, 2016b.

BIBLIOGRAPHY

- P. E. Sheese, K. Strong, R. L. Gattinger, E. J. Llewellyn, J. Urban, C. D. Boone, and A. K. Smith. Odin observations of Antarctic nighttime NO densities in the mesosphere–lower thermosphere and observations of a lower NO layer. *J. Geophys. Res.*, 118:7414–7425, 2013. doi: 10.1002/jgrd.50563.
- J. Urban, N. Lautié, E. Le Flochmoën, C. Jiménez, P. Eriksson, E. Dupuy, L. El Amraoui, M. Ekström, U. Frisk, D. Murtagh, J. de La Noë, M. Olberg, and P. Ricaud. Odin/SMR limb observations of stratospheric trace gases: level 2 processing of ClO, N₂O, O₃, and HNO₃. *J. Geophys. Res.*, 110:D14307, July 2005. doi: 10.1029/2004JD005741.
- J. Urban, N. Lautié, D. Murtagh, P. Eriksson, Y. Kasai, S. Lossow, E. Dupuy, J. de La Noë, U. Frisk, M. Olberg, E. Le Flochmoën, and P. Ricaud. Global observations of middle atmospheric water vapour by the Odin satellite: An overview. *Planet. Space Sci.*, 55:1093–1102, June 2007. doi: 10.1016/j.pss.2006.11.021.
- J. Urban, D. P. Murtagh, Y. Kasai, A. Jones, and K. A. Walker. Global observations of stratospheric heavy ozone isotopologue enrichment with the Odin Sub-Millimetre Radiometer. *Proc. ESA Living Planet Symposium*, ESA-SP-722, 2013.

Appendix A | API description

This section describes the API calls used to get data from the DDS. The data is accessed through a hierarchical REST API where deeper URIs return more specific data. All call URIs have a common root `rest_api/v5`, which has been omitted below for clarity. All GET calls return JSON objects unless otherwise noted. Key/value pairs are listed as name of the key along with the type of the corresponding value within parentheses, followed by a brief description of the contents. See the sections on the different data sources for specifications on the structure of their respective JSON objects. This description is only for the Odin/SMR version 3 Level2 data. For details on how to access the collocated measurements from the VDS, see Rydberg et al. (2016b), for more details on the Level2 data format see Rydberg et al. (2016a); Pérot et al. (2017), and for a more general description of the Odin/SMR API, see <http://odin.rss.chalmers.se/apidocs/index.html>.

A.1 API calls

A.1.1 `level2/DDS/`

Method: *GET*

Get project information.

A.1.1.0.1 Parameters: None.

A.1.1.0.2 Data structure: Returns JSON object with the following structure:

```
{  
    "Data": [  
        {  
            "FreqMode": <int>,  
            "URLS": {  
                "URL-comment": <string: URL for comments for scans>,  
                "URL-failed": <string: URL for failed scans>,  
                "URL-scans": <string: URL for scans>  
            },  
            ...  
        },  
        ...  
    ],  
    "Count": <int: number of FreqModes in project>,  
    "Type": "level2_project_freqmode"  
}
```

A.1.2 `level2/DDS/area`

Method: *GET*

Get data in provided area.

A.1.2.0.1 Parameters:

- product (*array of strings*): Return data only for these products
- min_lat (*float*): Minimum latitude (-90 to 90)
- max_lat (*float*): Maximum latitude (-90 to 90)
- min_lon (*float*): Minimum longitude (0 to 360)
- max_lon (*float*): Maximum longitude (0 to 360)
- min_pressure (*float*): Minimum pressure (Pa)
- max_pressure (*float*): Maximum pressure (Pa)
- min_altitude (*float*): Minimum altitude (m)
- max_altitude (*float*): Maximum altitude (m)
- start_time (*date*): Return data after this date (inclusive)
- end_time (*date*): Return data before this date (exclusive)

Provide latitude and/or longitude limits to get data for a certain area of the earth. If no latitude or longitude limits are provided, data for the whole earth is returned. Choose between min/max altitude and min/max pressure.

A.1.2.0.2 Data structure: Returns JSON object with the following structure:

```
{  
  "Data": <array of Level2 Data Structures as described below>,  
  "Count": <int: number of matching data>,  
  "Type": "L2"  
}
```

A.1.3 level2/DDS/locations

Method: *GET*

Get data close to provided location.

A.1.3.0.1 Parameters:

- product (*array of strings*): Return data only for these products
- location (*array of strings; required*): Return data close to these locations ('lat,lon').
- radius (*float; required*): Return data within this radius from the provided locations (km).
- min_pressure (*float*): Minimum pressure (Pa)
- max_pressure (*float*): Maximum pressure (Pa)
- min_altitude (*float*): Minimum altitude (m)
- max_altitude (*float*): Maximum altitude (m)

- start_time (*date*): Return data after this date (inclusive)
- end_time (*date*): Return data before this date (exclusive)

Provide one or more locations and a radius to get data within the resulting circles on the earth surface. Choose between min/max altitude and min/max pressure.

A.1.3.0.2 Data structure: Returns JSON object with the same structure as endpoint A.1.2.

A.1.4 `level2/DDS/products/`

Method: *GET*

Get available products.

A.1.4.0.1 Parameters: None.

A.1.4.0.2 Data structure: Returns JSON object with the following structure:

```
{  
  "Data": <array of strings: product names>,  
  "Count": <int: number of available products>,  
  "Type": "level2_product_name"  
}
```

A.1.5 `level2/DDS/<string:date>/`

Method: *GET*

Get data for the provided date.

A.1.5.0.1 Parameters:

- product (*array of strings*): Return data only for these products
- min_pressure (*float*): Minimum pressure (Pa)
- max_pressure (*float*): Maximum pressure (Pa)
- min_altitude (*float*): Minimum altitude (m)
- max_altitude (*float*): Maximum altitude (m)
- start_time (*date*): Return data after this date (inclusive)
- end_time (*date*): Return data before this date (exclusive)

Choose between min/max altitude and min/max pressure.

A.1.5.0.2 Data structure: Returns JSON object with the same structure as endpoint A.1.2.

A.1.6 `level2/DDS/<int:frequencymode>/comments/`

Method: *GET*

Get list of comments for a frequency mode.

A.1.6.0.1 Parameters:

- offset (*int*): Skip scans before returning
- limit (*int; default: 1000*): Number of scans to return

A.1.6.0.2 Data structure: Returns JSON object with the following structure:

```
{  
    "Data": [  
        {  
            "Comment": <string: comment from processing>,  
            "URLS": {  
                "URL-failed": <string: URL for failed scans with comment>,  
                "URL-scans": <string: URL for successful scans with comment>  
            }  
        },  
        ...  
    ],  
    "Count": <int: number of unique comments>,  
    "Type": "level2_scan_comment"  
}
```

A.1.7 level2/DDS/<int:frequencymode>/failed/Method: *GET*

Get list of matching scans that failed the level2 processing.

A.1.7.0.1 Parameters:

- start_time (*date*): Return data after this date (inclusive)
- end_time (*date*): Return data before this date (exclusive)
- comment (*string*): Return scans with this comment
- offset (*int*): Skip scans before returning
- limit (*int; default: 1000*): Number of scans to return

A.1.7.0.2 Data structure: Returns JSON object with the following structure:

```
{  
    "Data": [  
        {  
            "Date": <string: date>,  
            "Error": <string: error message>,  
            "ScanID": <int: scan number>,  
            "URLS": {  
                "URL-ancillary": <string: URL for Level2 ancillary data>,  
                "URL-level2": <string: URL for Level2 data>,  
                "URL-log": <string: URL for Level1 log data>,  
                "URL-spectra": <string: URL for Level1 spectra>  
            }  
        },  
        ...  
    ],  
    "Count": <int: number of matching scans>,  
    "Type": "level2_failed_scan_info"  
}
```

A.1.8 `level2/DDS/<int:frequencymode>/products/`

Method: *GET*

Get available products for a given project and frequency mode.

A.1.8.0.1 Parameters:

A.1.8.0.2 Data structure: Returns JSON object with the same structure as endpoint A.1.4.

A.1.9 `level2/DDS/<int:frequencymode>/scans/`

Method: *GET*

Get list of matching scans.

A.1.9.0.1 Parameters:

- `start_time (date)`: Return data after this date (inclusive)
- `end_time (date)`: Return data before this date (exclusive)
- `comment (string)`: Return scans with this comment
- `offset (int)`: Skip scans before returning
- `limit (int; default: 1000)`: Number of scans to return

A.1.9.0.2 Data structure: Returns JSON object with the following structure:

```
{  
    "Data": [  
        {  
            "Date": <string: date>,  
            "ScanID": <int: scan number>,  
            "URLS": {  
                "URL-ancillary": <string: URL for Level2 ancillary data>,  
                "URL-level2": <string: URL for Level2 data>,  
                "URL-log": <string: URL for Level1 log data>,  
                "URL-spectra": <string: URL for Level1 spectra>  
            }  
        },  
        ...  
    ],  
    "Count": <int: number of matching scans>,  
    "Type": "level2_scan_info"  
}
```

A.1.10 `level2/DDS/<int:frequencymode>/<int:scannumber>/`

Method: *GET*

Get level2 data, info, comments, and ancillary data for one scan and frequency mode.

A.1.10.0.1 Parameters:

A.1.10.0.2 Data structure: Returns JSON object with the following structure:

```
{  
  "Data": {  
    "L2": <Level2 Data Structure as described below>,  
    "L2anc": <Level2 Ancillary Data Structure as described below>,  
    "L2c": <Level2 Comments Data Structure as described below>,  
    "L2i": <Level2 Info Data Structure as described below>,  
  },  
  "Count": null,  
  "Type": "mixed"  
}
```

A.1.11 level2/DDS/<frequencymode>/<scannumber>/L2/

Method: *GET*

Get level2 data for one scan and frequency mode.

A.1.11.0.1 Parameters :

- product (*array of strings*): Return data only for these products

A.1.11.0.2 Data structure: Returns JSON object with the following structure:

```
{  
  "Data": [  
    {  
      "AVK": <array of arrays of floats: averaging kernels at altitudes>,  
      "Altitude": <array of floats: altitudes>,  
      "Apriori": <array of floats: apriori data at altitudes>,  
      "ErrorNoise": <array of floats: noise error at altitudes>,  
      "ErrorTotal": <array of floats: total error at altitudes>,  
      "FreqMode": <int: frequency mode>,  
      "InvMode": "string",  
      "Lat1D": <float: approximate latitude of retrieval>,  
      "Latitude": <array of floats: latitudes for retrieval at altitudes>,  
      "Lon1D": <float: approximate longitude of retrieval>,  
      "Longitude": <array of floats: longitude for retrieval at altitudes>,  
      "MJD": <float: Modified Julian Date for retrieval>,  
      "MeasResponse": <array of floats: measurement response at altitudes>,  
      "Pressure": <array of floats: pressure at altitudes [Pa]>,  
      "Product": <string: product name>,  
      "Quality": <int: quality flag>,  
      "ScanID": <int: scan number>,  
      "Temperature": <array of float: retrieved temperature at altitudes [K]>,  
      "VMR": <array of float: retrieved volumetric mixing ratio at altitudes>  
    }  
  ],  
  "Count": null,  
  "Type": "L2"  
}
```

A.1.12 level2/DDS/<int:frequencymode>/<int:scannumber>/L2anc/

Method: *GET*

Get ancillary data for one scan and frequency mode.

A.1.12.0.1 Parameters: None.

A.1.12.0.2 Data structure: Returns JSON object with the following structure:

```
{
  "Data": [
    {
      "FreqMode": <int: frequency mode>,
      "InvMode": <string: inversion mode used in retrieval>,
      "LST": <float: local solar time>,
      "Lat1D": <float: approximate latitude of retrieval>,
      "Latitude": <array of floats: latitudes for retrieval at altitudes>,
      "Lon1D": <float: approximate longitude of retrieval>,
      "Longitude": <array of floats: longitude for retrieval at altitudes>,
      "MJD": <float: Modified Julian Date for retrieval>,
      "Orbit": <int: orbit number>,
      "Pressure": <array of floats: pressure at altitudes [Pa]>,
      "SZA": <array of floats: solar zenith angle for retrieval at altitudes>,
      "SZA1D": <float: approximate solar zenith angle for retrieval>,
      "ScanID": <int: scan number>,
      "Theta": <array of floats: potential temperature>
    }
  ],
  "Count": 1,
  "Type": "string"
}
```

A.1.13 level2/DDS/<int:frequencymode>/<int:scannumber>/L2i/

Method: *GET*

Get level2 auxiliary data for one scan and frequency mode.

A.1.13.0.1 Parameters: None.

A.1.13.0.2 Data structure: Returns JSON object with the following structure:

```
{
  "Data": {
    "BlineOffset": <array of arrays of floats: baseline offsets for spectra>,
    "ChannelsID": <array of floats: channel identifier>,
    "FitSpectrum": <array of arrays of floats: fitted spectra [K]>
    "FreqMode": <int: frequency mode>,
    "FreqOffset": <float: retrieved LO frequency offset [Hz]>,
    "InvMode": <string: inversion mode used in retrieval>,
    "LOFreq": <array of floats: LO frequency for each spectrum in scan [Hz]>,
    "MinLmFactor": <float: minimum Levenberg–Marquardt factor of OEM>,
    "PointOffset": <float: retrieved pointing offset [degree]>,
    "Residual": <float: residual of retrieved and measured spectra>,
    "SBpath": <float: sideband path used for retrieving spectra [m]>,
    "STW": <array of floats: satellite time words for spectra>,
    "ScanID": <int: scan number>,
    "Tsat": <float: satellite onboard temperature [K]>,
    "URLS": {
      "URL-ancillary": <string: URL for Level2 ancillary data>,
      "URL-level2": <string: URL for Level2 data>,
      "URL-log": <string: URL for Level1 log data>,
      "URL-spectra": <string: URL for Level1 spectra>
    }
  },
  "Count": null,
  "Type": "L2i"
```

}

A.1.14 `level2/DDS/<int:frequencymode>/<int:scannumber>/L2c/`

Method: *GET*

Get level2 comments for one scan and frequency mode.

A.1.14.0.1 Parameters: None.

A.1.14.0.2 Data structure: Returns JSON object with the following structure:

```
{  
    "Data": <array of strings: comments>  
    "Count": <int: number of comments for scan>,  
    "Type": L2c  
}
```

A.2 Example usage

This is a brief example of how to use the Odin/SMR API to access the DDS in Python. The basic procedure for navigating the call hierarchy is the same in all major programming languages and browsers.

```
# Setup the name space:  
import requests  
  
# Start by making a request to the root URI of the DDS API:  
r0 = requests.get('http://odin.rss.chalmers.se/rest_api/v5/level2/DDS/')  
  
# The request contains the returned JSON object, which in Python is a  
# dictionary, which can be printed or inspected to find out its keys and  
# contents. Let's assume that we have done that, or that we have read  
# the API documentation, so that we know that 'FreqMode' is a key.  
# Use this to single out the frequency mode of interest, in this case 2:  
FM2 = [x for x in r0.json()['Data'] if x['FreqMode'] == 2][0]  
  
# Make a new request using the URI provided in the JSON object:  
r1 = requests.get(FM2["URLS"]["URL-scans"])  
  
# Filter out data from 2012-03-11 and fetch the level2 data for the  
# first scan in the list:  
day = [x for x in r1.json()['Data'] if x['Date'] == '2012-03-11']  
r2 = requests.get(day[0]['URLS']['URL-level2'])  
  
# The Level2 data available to us, along with the ancillary and  
# auxilliary data:  
  
L2 = r2.json()['Data'][ 'L2']  
L2anc = r2.json()['Data'][ 'L2anc']  
L2aux = r2.json()['Data'][ 'L2i']  
  
# Now we have the data at hand and can proceed with crunching it!
```

Appendix B | Observation modes

Table B.1: Odin/SMR operational modes in aeronomy for AC1 and AC2 and the sub-mm frontends (FM = frequency mode)

Backend	Frontend	LO freq [GHz]	Source mode	FM
AC1	495 A2	492.750	Transport	23
		499.698	Transport	25
	549 A1	548.502	Stratospheric	02
		553.050	Water isotope	19
		547.752	Water isotope	21
		553.302	Transport	23
		553.298	Summer mesosphere	13
	572 B1	572.762	Transport	24
	AC2	497.880	Stratospheric	01
		492.750	Water isotope	08
		494.750	Water isotope	17
		499.698	Transport	25
	572 B1	572.762	Summer mesosphere	14
		572.964	Transport	22

Table B.2: Odin/SMR frontend and backend frequency specification for modes that are measured during part of the summer (when only backend AC2 is used, which is the case for 2013 and onwards). These modes are normally measured by backend AC1 (e.g. FM 102 and FM 2, FM 119 and FM 19, FM 121 and FM 21, and FM 113 and 13, are all identical except the Backend used).

Backend	Frontend	LO freq [GHz]	Source mode	FM
AC2	549 A1	548.502	Stratospheric	102
		553.050	Water isotope	119
		547.752	Water isotope	121
	555 B2	553.298	Summer mesosphere	113

Table B.3: Odin/SMR frontend and backend frequency specification

FM	SMR mode	LO Freq. [GHz]	Freq. Range [GHz]	Species	Name / ID
01	s1a or s1a	497.880	501.180–501.580	ClO, O ₃ , N ₂ O	SM-AC2a / 01
			501.980–502.380		SM-AC2b / 02
					SM-AC2ab / 29
02	s1a	548.502	544.102–544.902	HNO ₃ , O ₃	SM-AC1e / 03
08	w3a or w5a	492.750	488.950–489.350	H ₂ ¹⁸ O, O ₃ , H ₂ ¹⁶ O	IM-AC2a / 13
			488.350–488.750		IM-AC2b / 14
					IM-AC2ab / 30
17	w4a or w5b	494.250	489.950–490.750	HDO, 18 ₃ ^O	IM-AC2c / 21
19	w3a or w4a	553.050	556.550–557.350	H ₂ O, O ₃	IM-AC1c / 22
21	w5a or w5b	547.752	551.152–551.552	NO, O ₃ , H ₂ ¹⁷ O	IM-AC1de / 31
			551.752–552.152		
13	sm1a	553.298	556.598–557.398	H ₂ ¹⁶ O, O ₃	HM-AC1c / 19
14	sm1a	572.762	576.062–576.862	CO, O ₃	HM-AC2c / 20
22	cola	572.964	576.254–576.654	CO, O ₃ , HO ₂ , ¹⁸ O ₃	HM-AC2ab / 32
			577.069–577.469		
23	cola	492.750	488.350–488.750	H ₂ ¹⁶ O, O ₃	HM-AC1d / 33
			553.302	556.702–557.102	HM-AC1e / 34
24	sc1a	572.762	576.062–576.862	CO, O ₃	HM-AC1e / 35
25	ut1a	499.698	502.998–504.198	H ₂ ¹⁶ O, O ₃	TM-ACs1 / 36

Table B.4: Order of sub-bands from lowest frequency range to highest for some of the most common frequency modes. Sub-bands that are in bad condition have been *emphasised*, broken bands are in **bold**.

FM	Freq. Range [GHz]	Sub-band order
01	501.180–501.585	2 1 5 6
	501.980–502.380	4 3 7 8
02	544.102–544.902	1 2 6 5 8 7 3 4
08	488.950–489.350	8 7 3 4 6 5 1 2
17	489.950–490.750	8 7 3 4 6 5 1 2
19	556.550–557.350	4 3 7 8 2 1 5 6
21	551.152–551.552	4 3 7 8
	551.752–552.152	2 1 5 6