




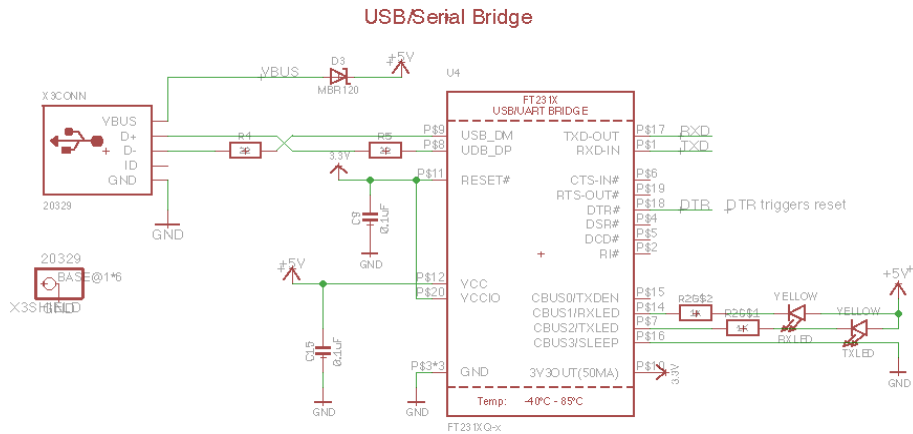

- > ATmega328 - 32KB of flash (500B reserved for bootloader) - 2KB of RAM - clocked at 16MHz
- > GPIO Logic level 5V - convert to 3.3V with solder jumper
- > FTDI FT231X based USB Programming and debugging

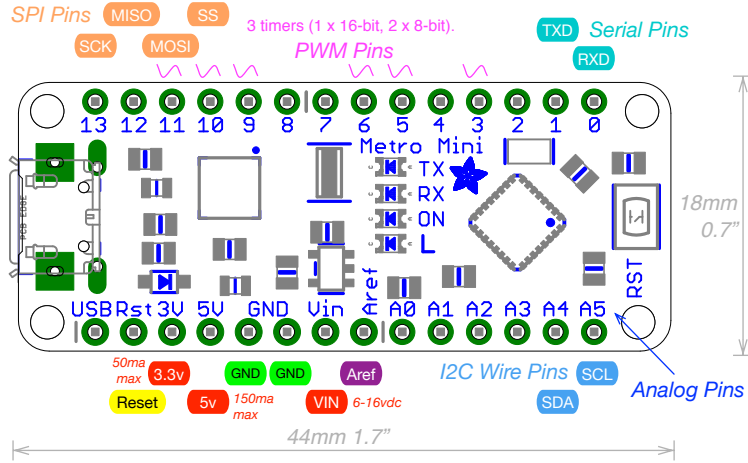


POWER SUPPLY: 5V

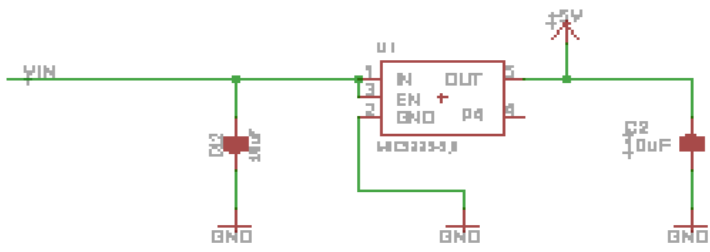

POWER SUPPLY: 3.3V



IO LEVEL SELECTION



ATMEGA328 MCU

