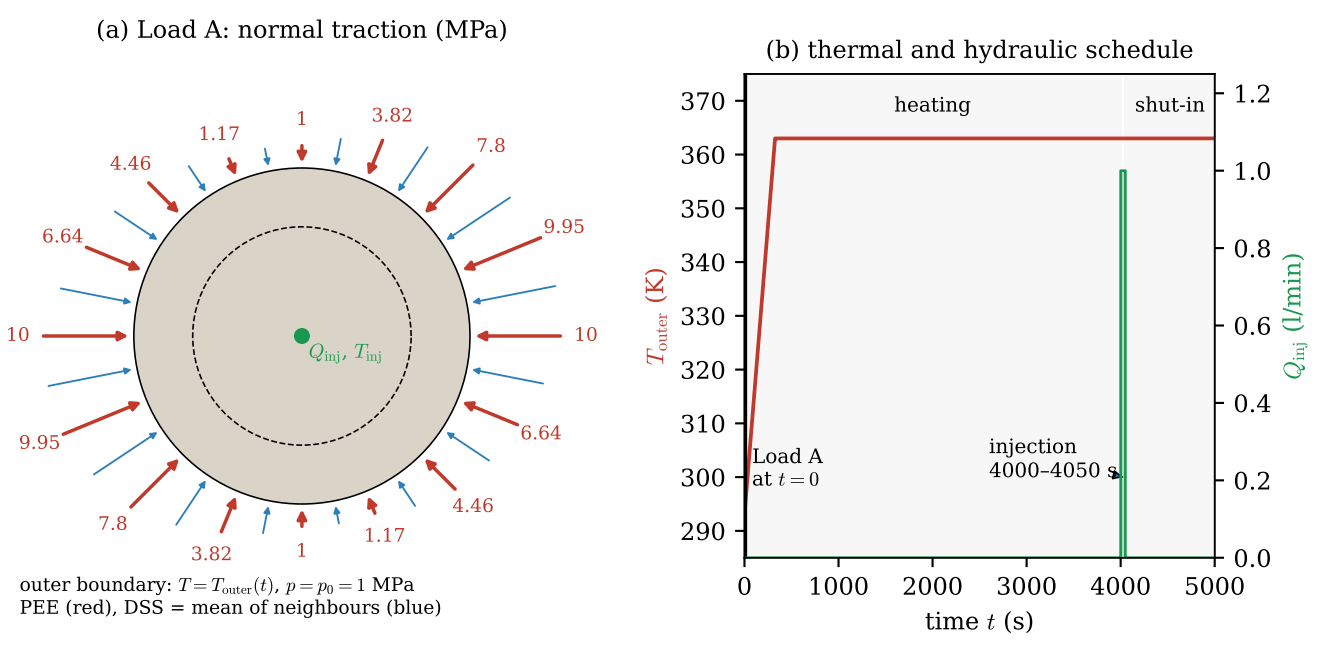
(a) Load A: normal traction (MPa)
1
3.82
7.8
9.95
10
6.64
4.46
1.17
Q_{inj}, T_{inj}
outer boundary: $T = T_{\mathrm{outer}}(t)$, $p = p_0 = 1$ MPa
PEE (red), DSS = mean of neighbours (blue)
(b) thermal and hydraulic schedule
heating
shut-in
Load A
at $t = 0$
injection
4000–4050 s
T_{outer} (K)
Q_{inj} (l/min)
time t (s)