



CH04 §2.6 — Paddle-frequency IN contamination & window-size sensitivity

Top: OUT/IN vs analysis window length (flat = metric robust). Bottom: A_in raw vs A_in corrected for wind PSD at paddle bin (green $\approx$ blue $\Rightarrow$ T_cross assumption holds).


Window sensitivity | 0.10 V

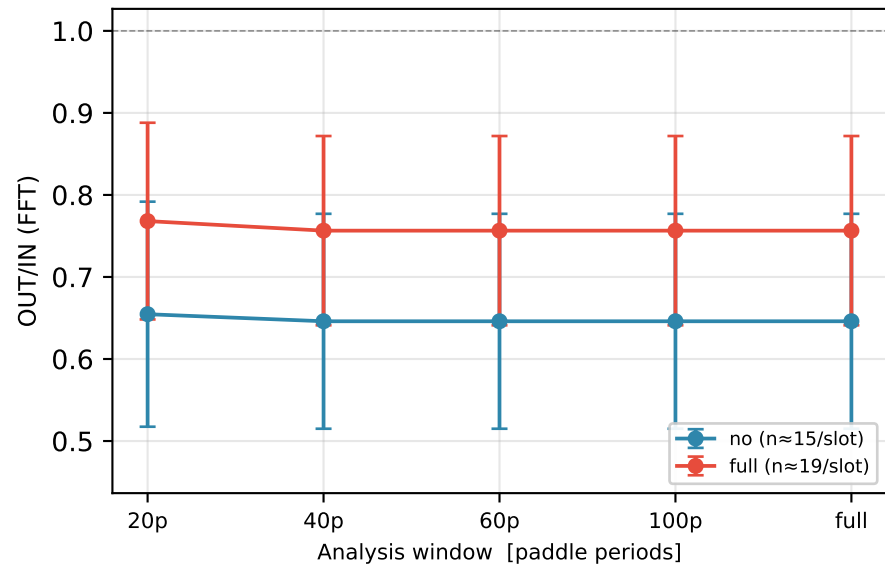


Window sensitivity | 0.20 V

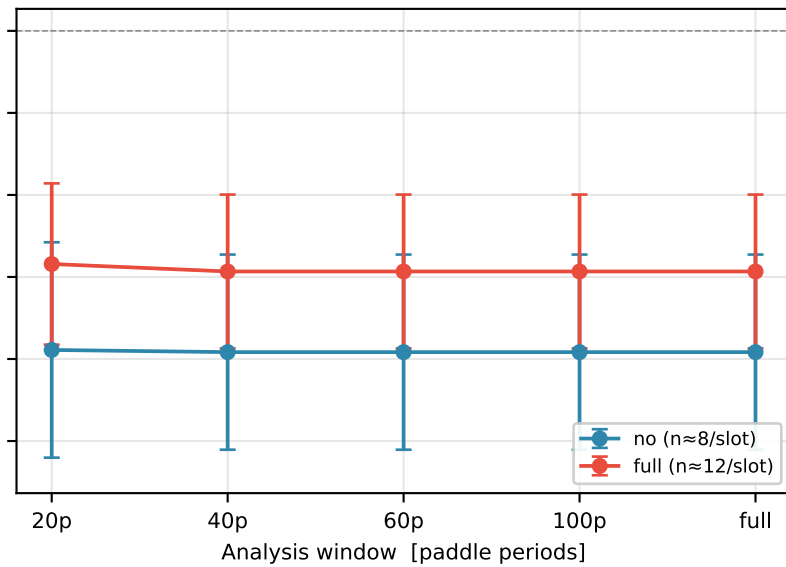


Window sensitivity | 0.30 V

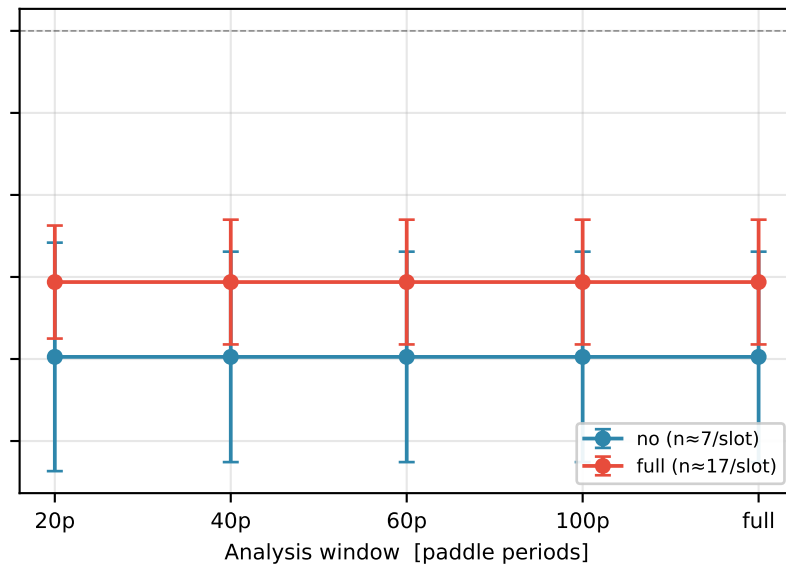

Wind correction | 0.10 V

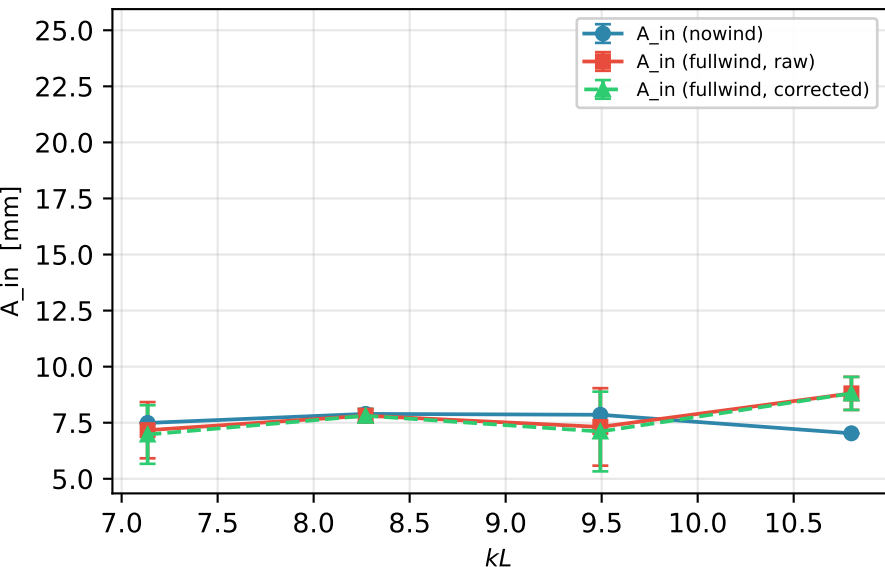

Wind correction | 0.20 V

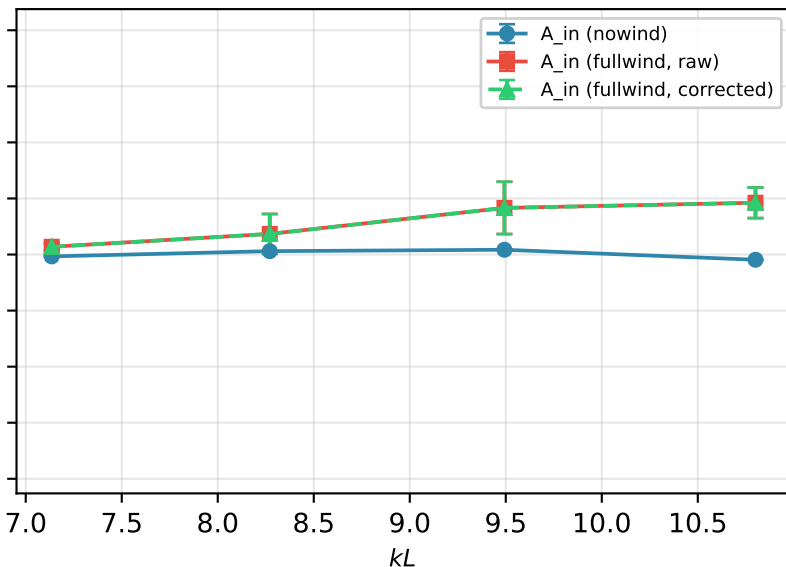

Wind correction | 0.30 V

