PCB schematic — Relay interface board

Relay interface board

Two 24 V DC relays switch two contactor coils from PLC outputs. Input header -J1 takes the PLC outputs and the coil return; output header -J2 carries the relay common and the two normally open contacts.

Revision	Date	Description	Created	Checked	Approved
1.1	2026-09-23	First issue	SK		
1.2	2026-10-02	Finder 40.61 relays, no flyback diodes	SK		
1.3	2026-10-05	Unit tag U2, connector pins not drawn when unused	SK		

Title **Relay interface board**			Number SKX-RIB-2	Revision 1.3	Revision date 2026-10-05		
Customer	Author SK	Page title Cover	Scope Relay interface board	Sheet	Page 1 of 5		

Notes

The relay coils carry no flyback diode: they are small, and the PLC output module switches them.

Title: **Relay interface board**			Number: SKX-RIB-2	Revision: 1.3	Revision date: 2026-10-05		
Customer	Author: SK	Page title: Notes	Scope: Relay interface board	Sheet	Page: 2 of 5		

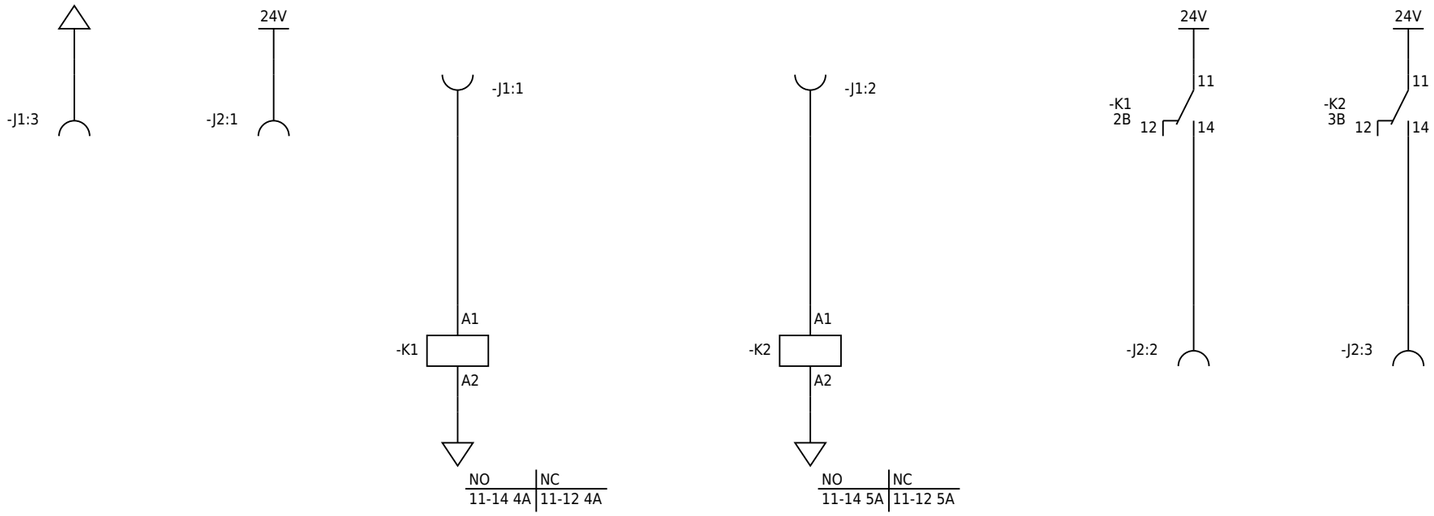

Title **Relay interface board**			Number SKX-RIB-2	Revision 1.3	Revision date 2026-10-05	
Customer	Author SK	Page title Relay interface board	Scope Relay interface board	Sheet 1 / 1	Page 3 of 5	

-J1

Pin	Ends
1	-K1:A1
2	-K2:A1
3	-K1:A2; -K2:A2

-J2

Pin	Ends
1	-K1:11; -K2:11
2	-K1:14
3	-K2:14

Title **Relay interface board**			Number SKX-RIB-2	Revision 1.3	Revision date 2026-10-05	
Customer	Author SK	Page title Connector list	Scope Relay interface board	Sheet	Page 4 of 5	

Mpn	Manufacturer	Description	Count	Designations
1757255	Phoenix Contact	PCB header, 3-pin, 5.08 mm pitch	2	-J1; -J2
40.61.9.024.1000	Finder	PCB relay, 1 changeover contact, 16 A, 24 V DC coil	2	-K1; -K2
SKX-RIB-2	this repo	Relay interface board, 2 channels, revision 01	1	

Title: **Relay interface board**			Number: SKX-RIB-2	Revision: 1.3	Revision date: 2026-10-05		
Customer	Author: SK	Page title: BOM	Scope: Relay interface board	Sheet	Page: 5 of 5		