
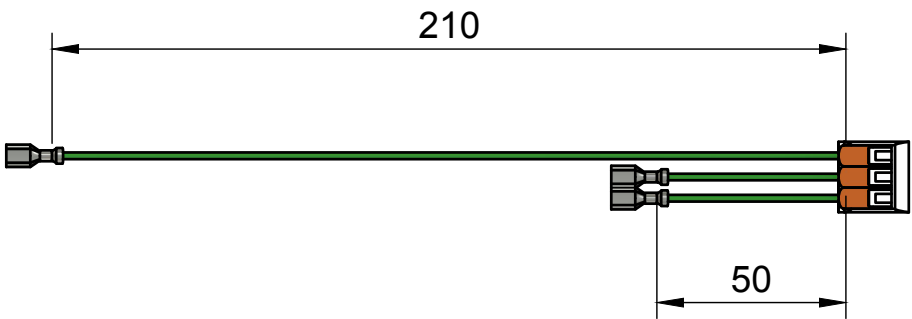


# CBL003

- 1. CBL003 CONNECTS EARTH GROUND BETWEEN THE RR-300-72 SMPS, MAGNETIC SHIELD, AND PEM
- 2. MAXIMUM VOLTAGE: 256 VAC (EMERGENCY ONLY)
- 3. BLADE CONNECTS ARE SIZED FPR 0.187" TERMINALS
- 4. BLADE CONNECTOR CRIMPS MAY BE SUBSTITUTED
- 5. 3-POSITION WAGO CONNECTOR MAY BE SUBSTITUTED WITH CRIMP
- 6. SILICONE WIRE INSULATION PREFERRED



CONDUCTOR	FROM REF.	WIRE	CRIMP
1	RR-300-72 SMPS GND	20 AWG, GREEN, STRANDED	1742883-1
2	MAGNETIC SHIELD	20 AWG, GREEN, STRANDED	1742883-1
3	PEM GND	20 AWG, GREEN, STRANDED	1742883-1

REVISION HISTORY				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	A	INITIAL RELEASE	[24.06.12]	J. PHILLIPS

DESIGNED J. PHILLIPS	[24.06.12]
APPROVED J. PHILLIPS	[24.06.12]

TITLE CBL003  
UNLESS OTHERWISE SPECIFIED

**RACK  
ROBOTICS**

DEPARTMENT	PROJECT CODE PC-02		
	PROTOTYPE CODE REVB		
	UNITS mm	SCALE 1:2	SHEET NO. 1/1