


## LOCATION OF CONTROLS

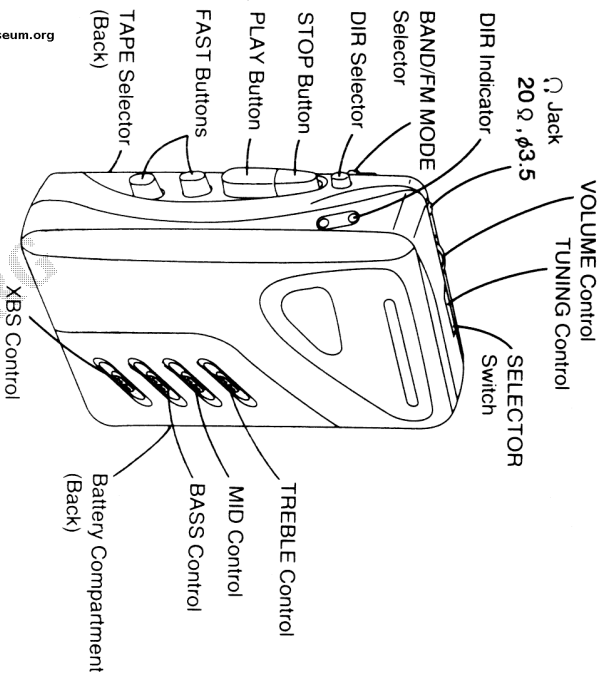

## DISASSEMBLY INSTRUCTIONS

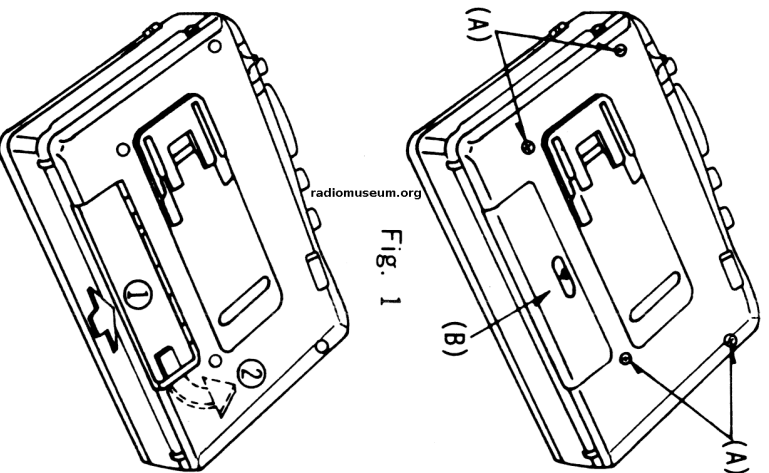


Fig. 1

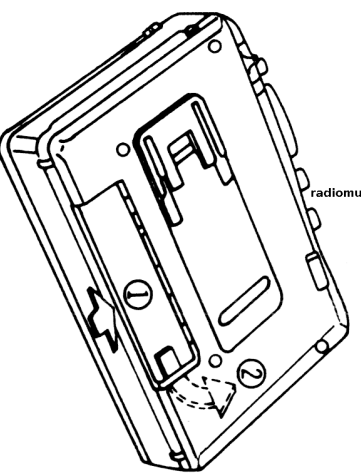


Fig. 2

- **Removal of the Rear Cabinet**
1. Remove the screws (A) (2×10mm×4)
  2. Open the battery cover (B)×1
  3. Remove the rear cabinet in the direction of arrow ① & ②.

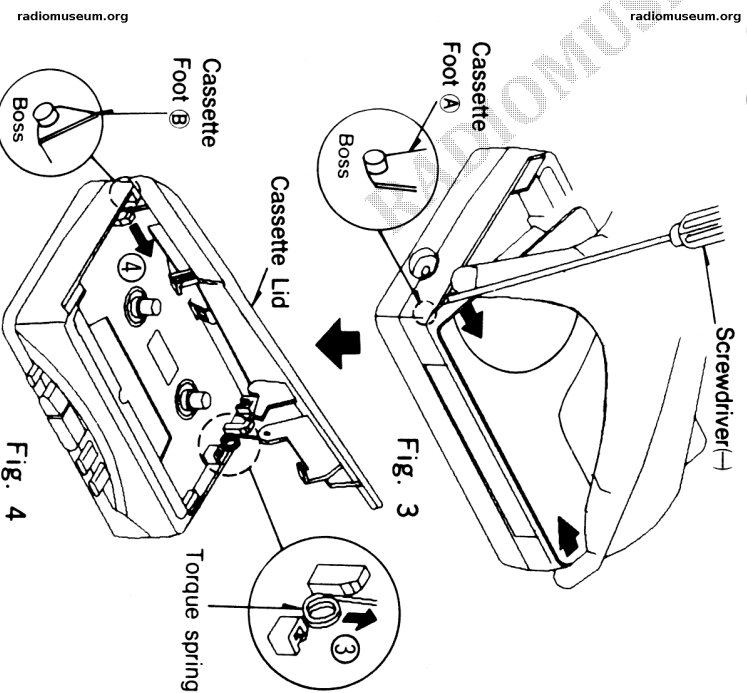


Fig. 3

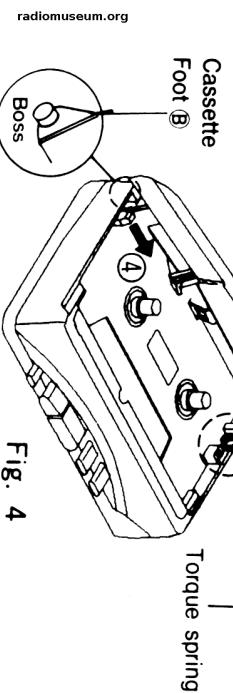


Fig. 4

- **How to Removal of the Cassette Lid**
- Note: Be careful not to break cassette foots ① and ② when removing the cassette lid.
1. Strongly press two sides of the cassette lid, then it was bent a little.
  2. With a (–) screwdriver as shown in Fig 3, and pull out the right-side of the cassette lid.
  3. Remove the torque spring ③ in the direction of arrow.
  4. By the direction of ④, remove the cassette foot.