Block Diagram:

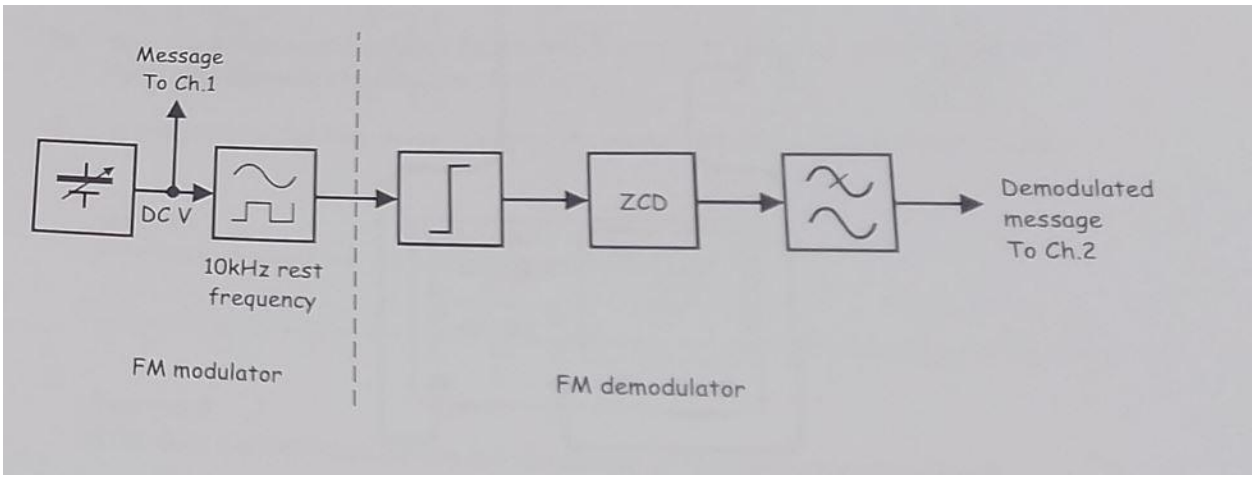

Set Up and Result:

Part A:

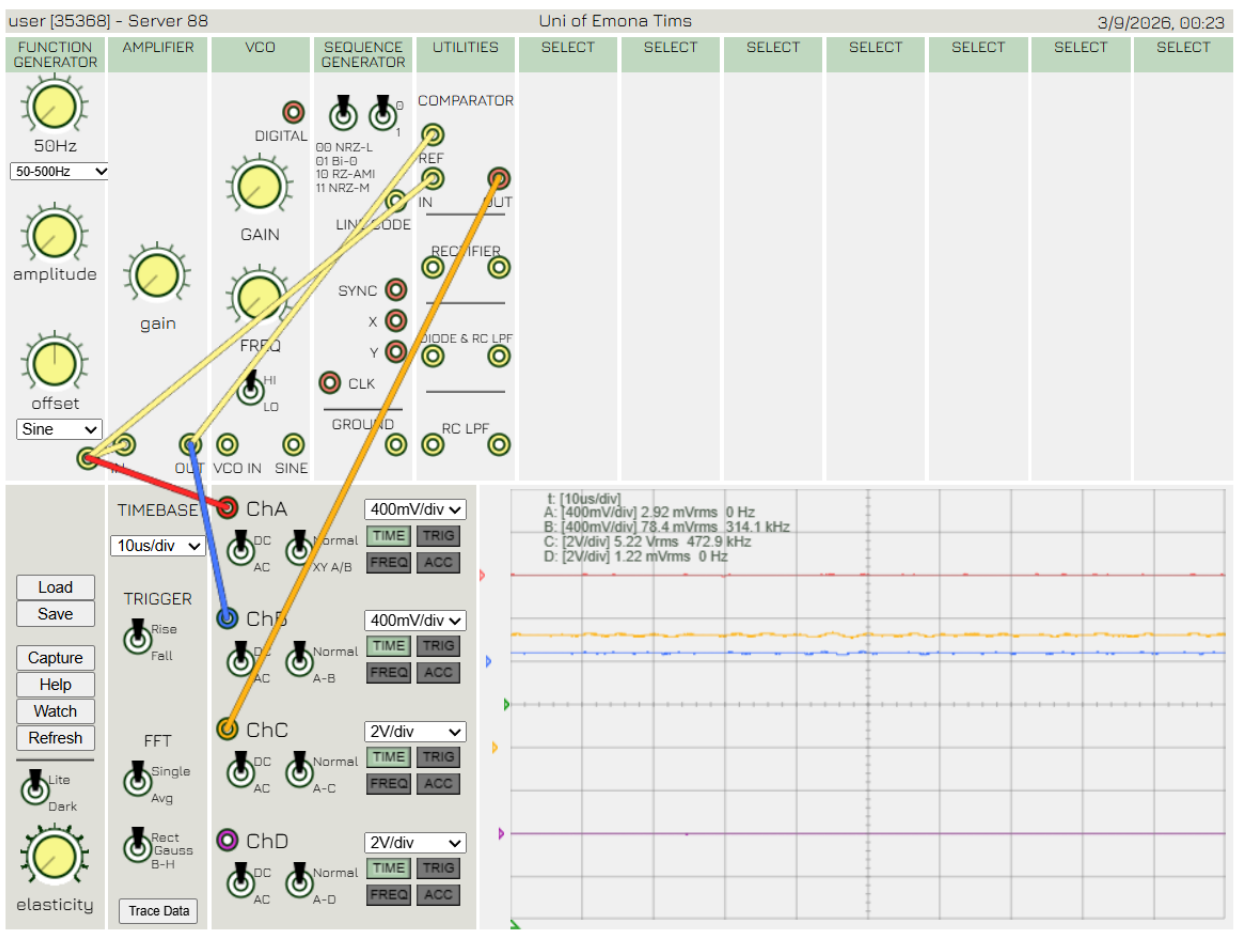

Part B:

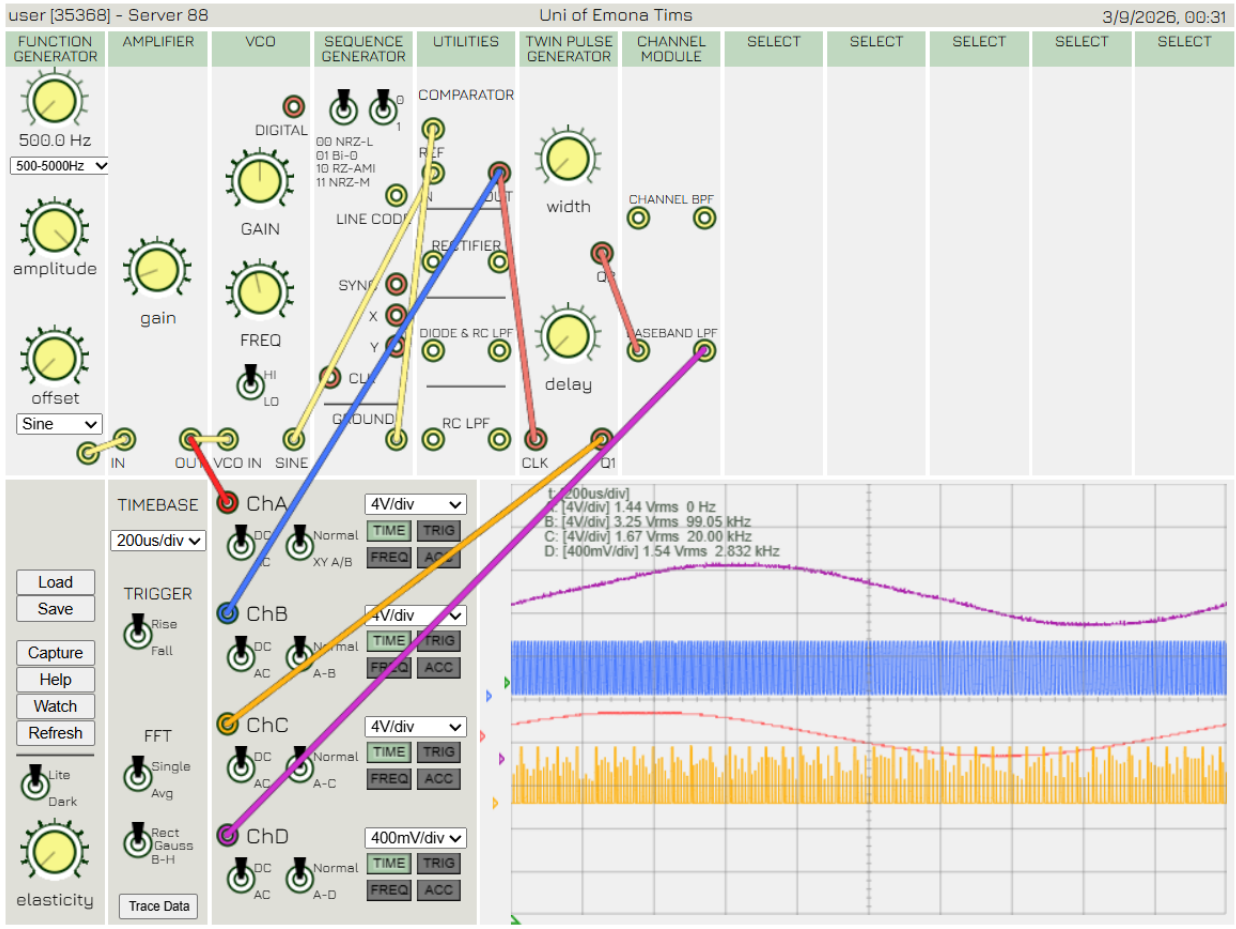
user [35368] - Server 88
Uni of Emona Tims
3/9/2026, 00:31
FUNCTION GENERATOR
AMPLIFIER
VCO
SEQUENCE GENERATOR
UTILITIES
TWIN PULSE GENERATOR
CHANNEL MODULE
SELECT
500.0 Hz
500-5000Hz
amplitude
offset
Sine
gain
DIGITAL
GAIN
FREQ
HI
LO
00 NRZ-L
01 Bi-0
10 RZ-AMI
11 NRZ-M
COMPARATOR
REF
LINE CODE
RECTIFIER
DIODE & RC LPF
RC LPF
GROUND
width
delay
CHANNEL BPF
BASEBAND LPF
IN
OUT
VCO IN
SINE
CLK
Q1
TIMEBASE
200us/div
TRIGGER
Rise
Fall
FFT
Single
Avg
Rect
Gauss
B-H
Trace Data
Load
Save
Capture
Help
Watch
Refresh
Lite
Dark
elasticity
ChA
ChB
ChC
ChD
4V/div
400mV/div
DC
AC
Normal
XY A/B
A-B
A-C
A-D
TIME
TRIG
FREQ
ACC
[200us/div]
[4V/div] 1.44 Vrms 0 Hz
B: [4V/div] 3.25 Vrms 99.05 kHz
C: [4V/div] 1.67 Vrms 20.00 kHz
D: [400mV/div] 1.54 Vrms 2.832 kHz