

TEK4090 – Introduction to Modern Control

Assignment 2 v4.0

Due: October 23 2024, 13:15

1. (10 points) Consider the continuous-time system,

$$\ddot{x} = u \tag{1}$$

$$J(t_0) = \frac{1}{2}x^2(0) + r \int_0^2 u^2 dt. \tag{2}$$

Hint: read §6.3 in Lewis, Syrmos, & Vraibie for some relevant example problems

- (a) Write the Hamilton-Jacobi-Bellman (HJB equation), eliminating $u(t)$

Ans: We begin by writing the hamiltonion equation:

$$H(x, u, \lambda, t) = ru^2 + \lambda^T f(x, u, t)$$

Where $\lambda \in \mathbb{R}^2$. We define f as a vector in $\mathbb{R}^2$ as well where

$$f = \begin{bmatrix} x_2 \\ u \end{bmatrix}$$

if we take $\dot{x} = x_2$ and $\dot{x}_2 = u$. We not get that the Hamiltonion is

$$H = ru^2 + \lambda_1 x_2 + \lambda_2 u$$

Our goal is to find the Hamilton Jacobi equation,

$$-J_t^* = \min_u (ru^2 + \lambda_1 x_2 + \lambda_2 u)$$

which we find by optimizing H for u and substituting the optimal u in H . First note that $\frac{\partial^2 H}{\partial u^2} = 2r \geq 0$, which is a condition for global convexity, assuming $r \geq 0$. This means that the optimal u^* we find is the global minimum of the Hamiltonion.

$$\begin{aligned} \frac{\partial H}{\partial u} &= 0 \\ &= 2ru + \lambda_2 \\ u^* &= -\frac{\lambda_2}{2r} \end{aligned}$$

We now substitute optimal control into h

$$\begin{aligned} H^* &= r \left(-\frac{\lambda_2}{2r} \right)^2 + \lambda_1 x_2 - \frac{\lambda_2^2}{2r} \\ &= \frac{\lambda_2}{4r} + \lambda_1 x_2 - \frac{\lambda_2^2}{2r} \\ &= \frac{-\lambda_2^2}{4r} + \lambda_1 x_2 \end{aligned}$$

Substituting this into J^* we get that

$$-J_t^* = \min_u (ru^2 + \lambda_1 x_2 + \lambda_2 u) = \frac{-\lambda_2^2}{4r} + \lambda_1 x_2$$

(b) Assume that the optimal cost-to-go function $J^*(t)$ is given by,

$$J^*(t) = \frac{1}{2}s_1(t)x^2(t) + s_2(t)x(t)\dot{x}(t) + \frac{1}{2}s_3(t)\dot{x}^2(t). \quad (3)$$

Use the HJB equation to derive coupled differential equations for these $s_i(t)$'s, and find boundary conditions for these equations.

Ans: We find that

- $\lambda_1 = \frac{\partial J^*}{\partial x} = s_1 x + s_2 \dot{x}$
- $\lambda_2 = \frac{\partial J^*}{\partial \dot{x}} = s_2 x + s_3 \dot{x}$
- $\frac{\partial J^*}{\partial t} = \frac{1}{2}s_1 \dot{x}^2 + s_2 x \ddot{x} + \frac{1}{2}s_3 \ddot{x}^2$

If we plug this into the HJB equation we found from a), we get

$$\begin{aligned} - \left[\frac{\partial J^*}{\partial t} = \frac{1}{2}\dot{s}_1 x^2 + \dot{s}_2 s_2 x \dot{x} + \frac{1}{2}\dot{s}_3 \dot{x}^2 \right] &= \frac{-1}{4r} (s_2 x + s_3 \dot{x})^2 + (s_1 x + s_2 \dot{x}) \dot{x} \\ &= \frac{-1}{4r} (s_2^2 x^2 + 2s_2 s_3 x \dot{x} + s_3^2 \dot{x}^2) + s_1 x \dot{x} + s_2 \dot{x}^2 \\ &= \frac{-s_2^2 x^2}{4r} + x \dot{x} \left(s_1 - \frac{s_2 s_3}{2r} \right) + \dot{x}^2 \left(s_2 - \frac{s_3^2}{4r} \right) \end{aligned}$$

Now we can match the coefficients with the original J^* and get

$$-\frac{1}{2}\dot{s}_1 x^2 - \dot{s}_2 x \dot{x} - \frac{1}{2}\dot{s}_3 \dot{x}^2 = \frac{-s_2^2 x^2}{4r} + x \dot{x} \left(s_1 - \frac{s_2 s_3}{2r} \right) + \dot{x}^2 \left(s_2 - \frac{s_3^2}{4r} \right)$$

- $-\frac{1}{2}\dot{s}_1 = -\frac{s_2^2}{4r}$
- $-\dot{s}_2 = s_1 - \frac{s_2 s_3}{2r}$
- $-\frac{1}{2}\dot{s}_3 = s_2 - \frac{s_3^2}{4r}$

Which makes

- $\dot{s}_1 = \frac{s_2^2}{2r}$
- $\dot{s}_2 = \frac{s_2 s_3}{2r} - s_1$
- $\dot{s}_3 = \frac{s_3^2}{2r} - 2s_2$

Now for the initial conditions. At $t = 2 = T$, cost to go is $J^*(T) = \frac{1}{2}x(T)^2$. From $J^* = \frac{1}{2}s_1(T)x^2 + s_2(T)xx + s_3(T)\dot{x}^2$, we draw that

- $s_1(T) = 1$
- $s_2(T) = 0$
- $s_3(T) = 0$

- (c) Write the linear state feedback optimal control policy in terms of the $s_i(t)$'s.
2. (10 points) Pick a system from a paper that you have found on a topic that you are interested in, potentially the topic you will choose for your final project.
- (a) What is/are the paper(s) you are drawing from?
 - (b) What are the dynamics of the system in question? What are the inputs and outputs?
 - (c) What is the system trying to achieve?
 - (d) What are the challenges for the system?
 - (e) What control tools can help the system overcome the challenges in achieving its goals?
3. (20 points) Suppose that $f : \mathbb{R} \mapsto \mathbb{R}$ is convex, and $a < b$ are in the domain of f .
- (a) Show that

$$f(x) \leq \frac{b-x}{b-a}f(a) + \frac{x-a}{b-a}f(b) \quad (4)$$

for all $x \in [a, b]$

Ans: A criteria for a function to be convex is that

$$f(x) \leq \lambda f(a) + (1 - \lambda) f(b)$$

$\forall x \in \mathbb{R}$

If we set $x = \lambda a + (1 - \lambda) b$ where $\lambda = \frac{b-x}{b-a}$, then

$$\begin{aligned} 1 - \lambda &= 1 - \frac{b-x}{b-a} \\ &= \frac{(b-a) - (b-x)}{b-a} \\ &= \frac{x-a}{b-a} \end{aligned}$$

And we get that

$$f(x) = f(\lambda a + (1 - \lambda) b) \leq \lambda f(a) + (1 - \lambda) f(b)$$

Which is the criteria for a function to be convex, and it is proved.

(b) Show that

$$\frac{f(x) - f(a)}{x - a} \leq \frac{f(b) - f(a)}{b - a} \leq \frac{f(b) - f(x)}{b - x} \quad (5)$$

for all $x \in (a, b)$. Draw a sketch that illustrates this inequality

Ans: If we pick up our old calculus text book, we find that a function $f : \mathbb{R} \rightarrow \mathbb{R}$ iff. $a \leq b \forall c \in \mathbb{R}$

$$\frac{f(c) - f(a)}{c - a} \leq \frac{f(b) - f(c)}{b - c}$$

If we assume that f is convex, then the line between the points $(a, f(a))$ and $(b, f(b))$ will never be under the point $(c, f(c))$.

1. Lets now denote the slope of the line $d((a, f(a)), (b, f(b)))$ as k . In this case, we use the $\frac{\text{rise}}{\text{run}}$ formula to get that $\frac{f(b)-f(a)}{b-a} = k$
2. The line $d((c, f(c)), (a, f(a)))$ as the line $\frac{f(c)-f(a)}{c-a} = k_1$

3. And finally, the line $d((b, f(b)), (c, f(c)))$ as the line $\frac{f(b)-f(c)}{b-c} = k_2$

If f is truly convex, then $k_1 \leq k \leq k_2$. Therefore,

$$\frac{f(c) - f(a)}{c - a} \leq \frac{f(b) - f(a)}{b - a} \leq \frac{f(b) - f(c)}{b - c}$$

Now we can just replace c with x , because this inequality is valid $\forall x \in (a, b)$

(c) Suppose that f is differentiable. Use the result in (b) to show that

$$f'(a) \leq \frac{f(b) - f(a)}{b - a} \leq f'(b). \quad (6)$$

Ans: From b we have that

$$\frac{f(c) - f(a)}{c - a} \leq \frac{f(b) - f(a)}{b - a} \leq \frac{f(b) - f(c)}{b - c}$$

We know from a definition of derivatives in our calculus book, that

$$f'(a) = \lim_{x \rightarrow a} \frac{f(x) - f(a)}{x - a}$$

. Then since $x - b \leq 0$ we have that

$$f'(b) = \lim_{x \rightarrow b} \frac{f(b) - f(x)}{b - x}$$

From this we get what we wanted to prove, if we allow x to approach both a and b respectively

(d) Suppose f is twice differentiable. Use the result in (c) to show that $f''(a) \geq 0$ and $f''(b) \geq 0$.

Ans: Assume that f is convex, then, $\forall c \in (a, b)$ we have $\frac{f(c)-f(a)}{c-a} \leq \frac{f(b)-f(c)}{b-c}$. From the mean value theorem, $\exists c_1, c_2 \in (a, c), (c, b)$ s.t. $\frac{f(c)-f(a)}{c-a} = f'(c_1)$ and $\frac{f(b)-f(c)}{b-c} = f'(c_2)$

Since we have that $a < c < b$ and f is convex, $f'(c_1) \leq f'(c_2)$, and we get that $f'(x) \geq 0 \forall x \in (a, b)$

Ans:

(a)

4. (20 points) (LQR for Buildings) Consider a multi-zone building as in Fig. 2.

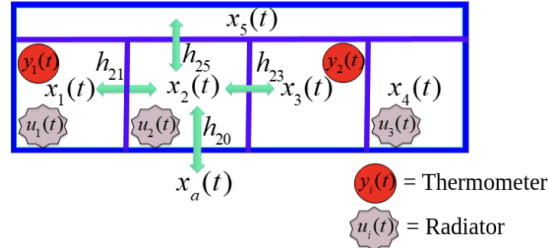


Fig. 2: Building model schematic

- (a) Write down the dynamical equations of the building in state-space form, including a term for disturbances $d(t)$, and for the ambient temperature $x_a(t)$, assuming the parameters are

$$\frac{h_{ij}}{C_i} = \begin{cases} 10 \text{ W/}^\circ\text{K} & i \text{ is adjacent to } j \\ 0 & \text{else} \end{cases} \quad (7)$$

$$C_i = 1.08 \times 10^6 \text{ J/}^\circ\text{K} \quad (8)$$

- (b) Consider an LQR cost function of the form

$$\int_0^T [(x - \bar{x})^T Q (x - \bar{x}) + u^T R u] dt, \quad (9)$$

where $T = 24\text{h} \times 60\frac{\text{m}}{\text{h}} \times 60\frac{\text{s}}{\text{m}} = 86400\text{s}$ is one day in seconds. Set $\bar{x} = 20^\circ$, and write the dynamics in the coordinates $z := x - \bar{x}$.

- (c) Note that driving the variable $z(t) \rightarrow 0$ is therefore equivalent to driving $x(t) \rightarrow 20^\circ$. Write a `matlab` script to solve the finite-time horizon LQR problem. Select a positive semi-definite Q and a positive-definite R that gives you “decent” results. Assume the initial conditions, disturbance, and ambient temperature follow:

$$x_i(0) = 15 - i \times \text{sign}\{(-1)^i\} \quad [^\circ \text{C}] \quad (10)$$

$$d(t) = \max \left[0, 500 \sin \left(\frac{2\pi t}{86400\text{s}} \right) - 300 \right] \quad [\text{W}] \quad (11)$$

$$x_a(t) = 20^\circ + 5 \sin \left(\frac{2\pi t}{86400\text{s}} \right) \quad [^\circ \text{C}] \quad (12)$$

where the sign function is:

$$\text{sign}(x) = \begin{cases} 1 & x > 0 \\ -1 & x < 0 \\ 0 & x = 0. \end{cases} \quad (13)$$

Note: If solving the finite-time problem proves too difficult, feel free to solve the infinite-time problem instead. **Matlab** has a built-in function called **lqr** that produces the (constant) gain K ; read the documentation for details.

(d) Provide:

- A description of your simulation code
- Plots of $d(t)$, $x_a(t)$, $x_i(t)$, and $u(t)$.
- A discussion of the effects of varying Q and R

Ans:

(a) To find the dynamical equations of the building in state-space form, we have to find the system on the form

$$\dot{x} = Ax + Bu, y = Cx$$

The individual room equations are

$$C_i \dot{x}_i(t) = \sum_{j \in \text{neighbors}} h_{ij} (x_j(t) - x_i(t)) + h_{i0} (x_a(t) - x_i(t)) + u_i(t) + d_i(t)$$

We rearrange this to get

$$\dot{x} = \sum_j \frac{h_{ij}}{C_i} (x_j(t) - x_i(t)) + \frac{h_{i0}}{C_i} (x_a(t) - x_i(t)) + \frac{u_i(t)}{C_i} + \frac{d_i(t)}{C_i}$$

We have 5 rooms, thus 5 states, so $x(t) = \begin{bmatrix} x_1(t) \\ x_2(t) \\ x_3(t) \\ x_4(t) \\ x_5(t) \end{bmatrix}$, 3 controllers that

regulate temperature, $u(t) = \begin{bmatrix} u_1(t) \\ u_2(t) \\ u_3(t) \end{bmatrix}$ and finally, one disturbance term for

every room $d(t) = \begin{bmatrix} d_1(t) \\ d_2(t) \\ d_3(t) \\ d_4(t) \\ d_5(t) \end{bmatrix}$

We incorporate the disturbance term, ambient temperatures and the controls

(radiators) into a single vector $u^* = \begin{bmatrix} u \\ d \\ x_a \end{bmatrix}$

$$\frac{h_{ij}}{C_i} = \begin{cases} 10W/^\circ K, & \text{if } i \text{ adjacent to } j \\ 0, & \text{else} \end{cases}$$

This makes A to be a banded matrix. Since all rooms are adjacent to room 5, the matrix A becomes

$$A = \begin{bmatrix} -\sum_j \frac{h_{1j}}{C_1} & \frac{h_{12}}{C_1} & 0 & 0 & \frac{h_{15}}{C_1} \\ \frac{h_{21}}{C_2} & -\sum_j \frac{h_{2j}}{C_2} & \frac{h_{23}}{C_2} & 0 & \frac{h_{25}}{C_2} \\ 0 & \frac{h_{32}}{C_3} & -\sum_j \frac{h_{3j}}{C_3} & \frac{h_{34}}{C_3} & \frac{h_{35}}{C_3} \\ 0 & 0 & \frac{h_{43}}{C_4} & -\sum_j \frac{h_{4j}}{C_4} & \frac{h_{45}}{C_4} \\ \frac{h_{51}}{C_5} & \frac{h_{52}}{C_5} & \frac{h_{53}}{C_5} & \frac{h_{54}}{C_5} & -\sum_j \frac{h_{5j}}{C_5} \end{bmatrix} = \begin{bmatrix} -30 & 10 & 0 & 0 & 10 \\ 10 & -40 & 10 & 0 & 10 \\ 0 & 10 & -40 & 10 & 10 \\ 0 & 0 & 10 & -30 & 10 \\ 10 & 10 & 10 & 10 & -50 \end{bmatrix}$$

Since there are three actuators in rooms 1, 2 and 4, the B matrix is written as

$$B = \begin{bmatrix} \frac{1}{C_1} & 0 & 0 \\ 0 & \frac{1}{C_2} & 0 \\ 0 & 0 & 0 \\ 0 & 0 & \frac{1}{C_4} \\ 0 & 0 & 0 \end{bmatrix} = \begin{bmatrix} \frac{1}{1.08 \times 10^6} & 0 & 0 \\ 0 & \frac{1}{1.08 \times 10^6} & 0 \\ 0 & 0 & 0 \\ 0 & 0 & \frac{1}{1.08 \times 10^6} \\ 0 & 0 & 0 \end{bmatrix}$$

We have the vector b that takes into account the ambient coupling of temperatures.

$$b = \begin{bmatrix} H_{10} \\ H_{20} \\ H_{30} \\ H_{40} \\ H_{50} \end{bmatrix} = \begin{bmatrix} 10 \\ 10 \\ 10 \\ 10 \\ 10 \end{bmatrix}$$

and D is a diagonal matrix with $\frac{1}{C_i} = \frac{1}{1.08 \times 10^6}$ for disturbance inputs.

If we now follow the notes on building control from the lecture slides of optimal control (lecture 4), we obtain the dynamic equations $\dot{x} = Ax(t) + Bu(t) + bx_a(t) + Dd(t)$

- (b) For this problem, we note that $z = x - \bar{x}$, then $x = z + \bar{x}$ and $\dot{x} = \dot{z}$ since $\bar{x}$ is a constant temperature of $20^\circ C \approx 293^\circ K$ since $1^\circ C = 1K$ ($K = \text{Kelvin}$)

so we get the dynamics in the z coordinates as

$$\begin{aligned}\dot{z} &= A(z + \bar{x}) + Bu \\ &= Az + A\bar{x} + Bu\end{aligned}$$

$A\bar{x}$ can be seen as the forcing term towards the reference temperature in the system.

- (c) Solving the finite-time horizon problem seems to me very hard, as we don't have any initial points to work backwards from. So I just used the infinite-time horizon

I will attach the matlab script below. From experimenting, I see that a larger value of Q on the diagonals, makes the system more stable, and temperatures in all rooms converge to 20 degrees. Moderate R values allow for moderate control, without spending too much energy. For large values on the diagonal of Q , we prioritize error tracking accuracy. This leads to smaller steady state errors. Values Can go as far as 1000

For the R matrix, we should have smaller values, as far down as 100. What this leads to, is sufficient control action. It means that we don't overdo control, and don't underdo, such that we don't oscillate the control effort.

We see that the Q and R values become weights that account for how important we want to optimize different parts of our system

- (d) The plant system from the exercise, $\dot{x} = Ax + Bu$, $y = Cx$. From b), we got that $\dot{z} = Az + A\bar{x} + Bu$. Because of the disturbance terms, we have several terms to include

$$B_d = \begin{bmatrix} 1.08 \times 10^{-6} & 0 & 0 & 0 & 0 \\ 0 & 1.08 \times 10^{-6} & 0 & 0 & 0 \\ 0 & 0 & 1.08 \times 10^{-6} & 0 & 0 \\ 0 & 0 & 0 & 1.08 \times 10^{-6} & 0 \\ 0 & 0 & 0 & 0 & 1.08 \times 10^{-6} \end{bmatrix}$$

$$\text{and } B_u = \begin{bmatrix} 1.08 \times 10^{-6} & 0 & 0 \\ 0 & 1.08 \times 10^{-6} & 0 \\ 0 & 0 & 0 \\ 0 & 0 & 1.08 \times 10^{-6} \\ 0 & 0 & 0 \end{bmatrix} \quad \text{and finally } B_a = \begin{bmatrix} 10 \\ 10 \\ 10 \\ 10 \\ 10 \end{bmatrix}$$

We are then allowed to rewrite our system as

$$\begin{aligned}
\dot{z} &= Az + A\bar{x} + B_d d + B_a x_a \\
\dot{z} &= Az + B_u u^* + B_d d + \begin{bmatrix} 10 \\ 10 \\ 10 \\ 10 \\ 10 \end{bmatrix} \left(293 + 5 \sin \left(\frac{2\pi t}{86400s} \right) \right) - 293 * \begin{bmatrix} 10 \\ 10 \\ 10 \\ 10 \\ 10 \end{bmatrix} \\
\dot{z} &= Az + B_u u^* + B_d d + \begin{bmatrix} 10 \\ 10 \\ 10 \\ 10 \\ 10 \end{bmatrix} * 5 \sin \left(\frac{2\pi t}{86400s} \right)
\end{aligned}$$

The formula for the initial conditional temperature in all 5 rooms is provided, and in degrees they are (17, 13, 18, 11, 20) and in z coordinates, they are (-4, -7, -2, -9, 0)

For the LQR system design, I use the lqr function with $Q = I * q$ and $R = I * r$. The difference ($q - r$) indicates if I favor tracking errors or control effort of the radiators more. In my case, with $q = 1e6$ and $r = 1e2$, the balance is $\frac{q}{r} = 1000$.

For observer design, we must check that the system is observable. The LQR controller $u = -Kz$ requires full state knowledge. With only two temperature measurements in two rooms, we need full state observability over all the states $(z)_i^{1to5}$. We have the true system $\dot{z} = Az + Bu + \text{disturbance term}$, and in parallel, we have an observer running $\dot{\hat{z}} = A\hat{z} + Bu + L(y - C\hat{z})$

To derive the augmented matrix, we have the true state dynamic $\dot{z} = Ax + Bu + B_{ext}w$ where $w = \begin{bmatrix} d \\ x_a \end{bmatrix}$. The observer dynamics is defined as

$$\begin{aligned}
\frac{d\hat{z}}{dt} &= A\hat{z} + Bu + L(Cz - C\hat{z}) \\
&= \hat{z}(A - LC) + Bu + LCz
\end{aligned}$$

The control using the estimates is

$$u = -K\hat{z}$$

Substituting this to the true dynamics gives

$$\dot{z} = Ax + B(-K\hat{z}) + B_{ext}w$$

Also substituting into the observer,

$$\frac{d\hat{z}}{dt} = LCz + (A - LC)\hat{z} - BK\hat{z}$$

And now pulling it into matrix form we get

$$A_{aug} = \begin{bmatrix} A & -B_uK \\ LC & A - B_uK - LC \end{bmatrix}$$

Now

- A_{aug} is a 10×10 matrix
- B_{aug} is a 10×6 matrix
- z_{aug} is a 10×1 matrix

Now the plot looks like this, and it should include everything demanded

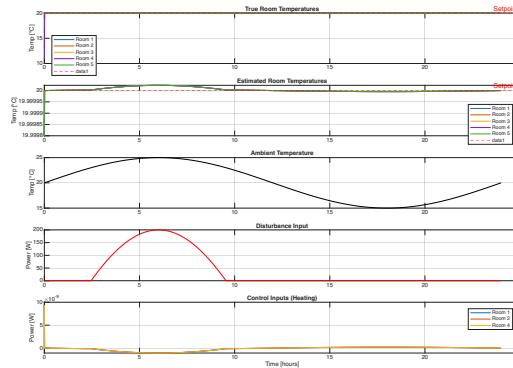


Fig. 2: Building model schematic

5. (10 points) Suppose that $Q = \mathbf{0}$, the zero matrix, and $R = I$. Prove that

$$x_0^T S_0 x_0 = \min_{\{u_k\}_{k=0}^{T-1}} \sum_{k=0}^{T-1} \|u_k\|_2^2, \quad (14)$$

meaning that $J_0 = x_0^T S_0 x_0$ is the minimum control energy required to drive the system to zero.

Ans: We have the discrete LQR with dynamic programming, and an associated cost index

$$J_i = x_N^T S_N x_N + \sum_{k=i}^{N-1} (x_k^T Q x_k + u_k^T R u_k)$$

we are given that $Q = 0$ and $R = I$. Then we get the cost index

$$J_i = x_N^T S_N x_N + \sum_{k=i}^{N-1} u_k^T u_k$$

We want to find the control sequence u^* that minimizes the cost function J_i . So our problem is the optimization problem

$$J_0^* = \min_u J_o(u)$$

s.t. $x_{k+1} = Ax_k + Bu_k$. This is largely already proved on page 270-271 in Optimal Control by Lewis, but I will show the main results. We will have big help of the principle of optimality, which states that along the optimal path, any subpath along that trajectory, is also an optimal trajectory.

So we have that $J_N^* = x_N^T S_N x_N$. Now decrement to $N-1$ and get $J_{N-1} = u_{N-1}^T u_{N-1} + x_N^T S_N x_N$ and substitute in $x_{k+1} = Ax_k + Bu_k$.

$$J_{N-1} = u_{N-1}^T u_{N-1} + (Ax_{N-1} + Bu_{N-1})^T S_N (Ax_{N-1} + Bu_{N-1})$$

Now we optimize, and since the cost function is convex, we know we find the minimum when $\frac{\partial J_{N-1}}{\partial u} = 0 = u_{N-1} + B^T S_N (Ax_{N-1} + Bu_{N-1})$ and get

$$\begin{aligned} 0 &= u_{N-1} + B^T S_N Ax_{N-1} + B^T S_N Bu_{N-1} \\ &= u_{N-1} (I + B^T S_N B) + B^T S_N Ax_{N-1} \\ u_{N-1}^* &= -(I + B^T S_N B)^{-1} + B^T S_N Ax_{N-1} \end{aligned}$$

If we now define the gain as

$$K = -(I + B^T S_N B)^{-1} + B^T S_N A$$

we get that

$$u_{N-1}^* := K_{N-1} x_{N-1}$$

which is the optimal cost to go from step number $N - 1$. We can go recursively back and find that

$$\begin{aligned} J_0^* &= x_0^T S_0 x_0 \\ &= x_N^T S_N x_N + \sum_{k=0}^{N-1} (u_k^*)^T u_k^* \\ &= \sum_{k=0}^{N-1} \|u_k^*\|_2^2 \end{aligned}$$

Now we just also use the fact that $J_0^* = \min_u J_0(u)$ and get that

$$x_0^T S_0 x_0 = \min_u \sum_{k=0}^{N-1} \|u_k\|_2^2$$

6. (10 points) *Crassidis & Junkins* Problem 3.14

Ans:

7. (10 points) *Crassidis & Junkins* Problem 3.15

Ans:

8. (10 points) *Crassidis & Junkins* Problem 7.4

Ans: