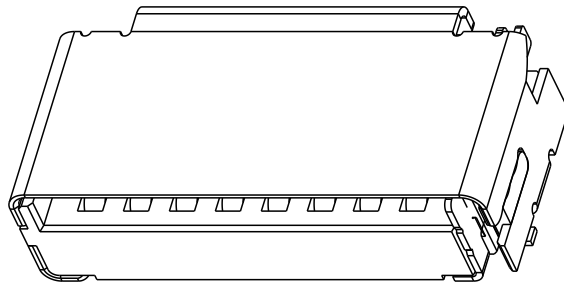
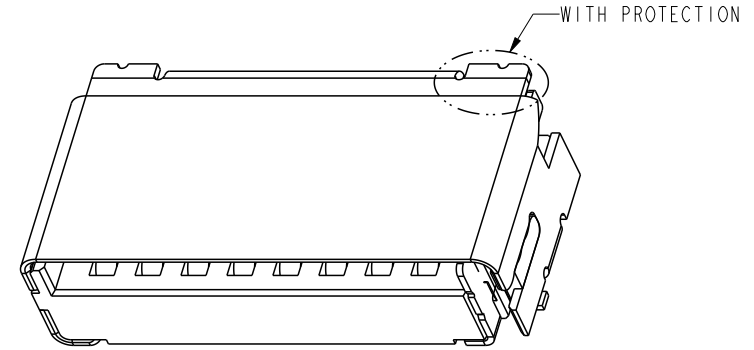


PRODUCT NO	MOTOROLA P/N	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F	REMARK
10067099-100LF	3971730C03	3.05MM	1.85MM	3.40MM	1.00MM	1.20MM	3.05MM	NO PROTECTION
10067099-200LF	3971730C02	2.65MM	1.45MM	3.50MM	0.90MM	1.00MM	2.95MM	NO PROTECTION
10067099-400LF	3971730C03	3.05MM	1.85MM	3.40MM	1.00MM	1.20MM	3.05MM	WITH PROTECTION
10067099-500LF	3971730C02	2.65MM	1.45MM	3.50MM	0.90MM	1.00MM	2.95MM	WITH PROTECTION



10067099-100LF/200LF



10067099-400LF/500LF

NOTES:

1. MATERIAL:

HOUSING: 30% G/F LCP, UL 94V-0, COLOR: BLACK.

CONTACT & DETECT PIN: COPPER ALLOY, THICKNESS=0.15MM.

CONTACT PLATING: 50u" MIN. OF Ni UNDERPLATE, GOLD FLASH

OVER ALL, CONTACT AREA PLATING 30u" GOLD.

DETECT PIN PLATING: 50u" MIN. OF Ni UNDERPLATE, GOLD FLASH

ON CONTACT AREA, TIN PLATED ON SOLDER AREA.


BRACKET: STAINLESS STEEL, THICKNESS=0.20MM, GOLD FLASH ON SOLDER AREA.


2. PRODUCT PERFORMANCE SPEC. PER GS-12-451.


3. PACKAGE SPEC. PER GS-14-1162.

4. "■" REPRESENT CRITICAL DIMS AND NEED TO MEET Cpk>1.5

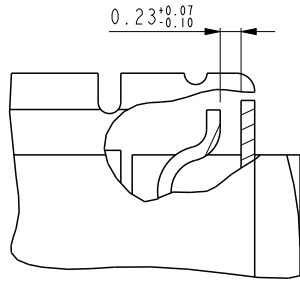
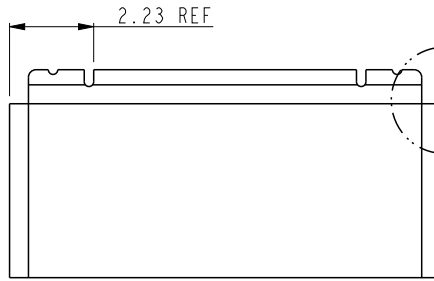
5. THIS PRODUCT IS ROHS COMPLIANT, AND MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS PER GS-22-008.

spec ref		*		dr	wcadmin, wcadm	2007/03/30			size	A4	scale	4.000							
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Li-Qing Lei	2022/06/17			ecn no	ELX-N-44341-1									
				chr	-	-			rel level			Released							
				appr	Tim Yao	2022/06/17			product family										
surface		linear	0.X	±0.30		title			TFLASH CONNECTOR ASSEMBLY				10067099		rev	H			
			0.XX	±0.15													TFLASH CONNECTOR WITH CARD DETECTING		
			0.XXX	±0.08															
	angular	0°	±2°																
				amphenol-icc.com	cat. no.		10067099		Product - Customer Drw				sheet 1 of 3						

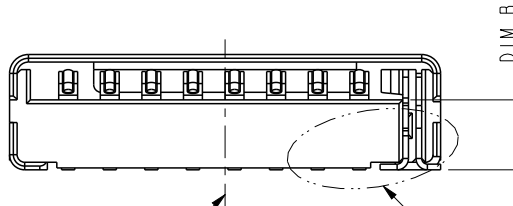

spec ref		*		dr	wcadmin, wcadm	2007/03/30	projection		mm	size	A4	scale	5.000
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Li-Qing Lei	2022/06/17		ecn no ELX-N-44341-1					
				chr	-	-							
				appr	Tim Yao	2022/06/17		product family					rel level Released
surface		linear	0.X	±0.30	Amphenol FCi	+TFLASH CONNECTOR ASSEMBLY TFLASH CONNECTOR WITH CARD DETECTING	dwg no	10067099			rev	H	
			0.XX	±0.15									
			0.XXX	±0.08									
		angular	0°	±2°	amphenol-icc.com	cat. no.	10067099	Product - Customer Drw			sheet 2 of 3		



PRODUCT NO	MOTOROLA P/N	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F	REMARK
10067099-400LF	3971730C03	3.05MM	1.85MM	3.40MM	1.00MM	1.20MM	3.05MM	WITH PROTECTION
10067099-500LF	3971730C02	2.65MM	1.45MM	3.50MM	0.90MM	1.00MM	2.95MM	WITH PROTECTION

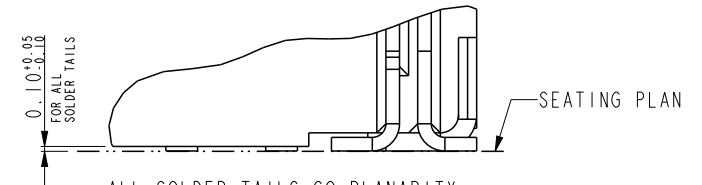
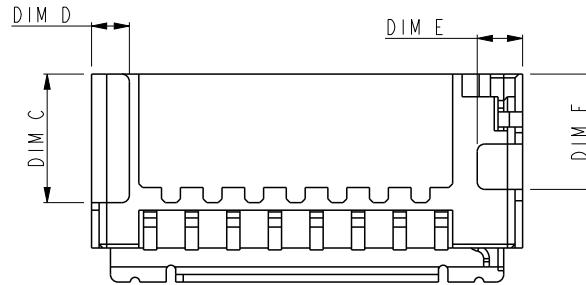

DETAIL C
SCALE 12.000

SEE DETAIL C

NOTE:
1. TOLERANCE FOR PCB LAYOUT: $\pm 0.05\text{MM}$.

Ø OF CONNECTOR

SEE DETAIL A

ALL SOLDER TAILS CO-PLANARITY
FROM SEATING PLANE: 0.08MM MAX.DETAIL A
SCALE 12.000FOR THE OTHER DIMENSIONS
ARE THE SAME AS -100LF

spec ref	*	dr	wcadmin, wcadm	2007/03/30	projection	mm	size	A4	scale	5.000
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng	Li-Qing Lei	2022/06/17			ecn no	ELX-N-44341-1		
		chr	-	-			rel level	Released		
		appr	Tim Yao	2022/06/17	product family					
surface	linear	0.X	±0.30	Amphenol FCI	title	TFLASH CONNECTOR ASSEMBLY	dwg no	10067099	rev	H
		0.XX	±0.15			TFLASH CONNECTOR WITH CARD DETECTING				
		0.XXX	±0.08	amphenol-icc.com	cat. no.	10067099	Product - Customer Drw	sheet 3 of 3		
	angular	0°	±2°							

Crea File: ELX-MC-AAC, REV F, 2020-12-21

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[10067099-500LF](#) [10067099-200LF](#) [10067099-100LF](#) [10067099-400LF](#)