



# Cambridge (CIE) IGCSE Physics



Your notes

## Light

### Contents


- \* Reflection of Light
- \* Investigating Reflection
- \* Refraction of Light
- \* Refractive Index
- \* Total Internal Reflection
- \* Ray Diagrams
- \* Real & Virtual Images
- \* Real Images
- \* Virtual Images
- \* Correcting Sight
- \* Dispersion of Light



# Ray diagrams

- In optics, a **normal line** is drawn at right angles to the **boundary** between two **media**
- In reflection, angles are measured between the ray (showing the wave direction) and the normal line
  - The angle of the wave approaching the boundary is called the **angle of incidence ( $i$ )**
  - The angle of the wave leaving the boundary is called the **angle of reflection ( $r$ )**
- When drawing a ray diagram an arrow is used to show the direction the wave is travelling
  - An **incident ray** has an arrow pointing **towards** the boundary
  - A **reflected ray** has an arrow pointing **away** from the boundary

## Ray diagram of reflection

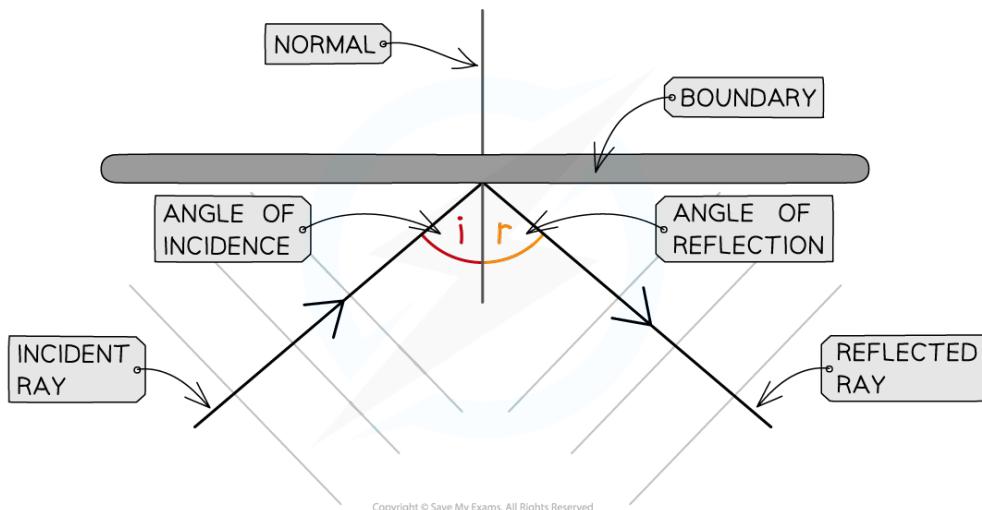

A ray diagram for light reflecting at a boundary, showing the normal, angle of incidence and angle of reflection

# The law of reflection

- The **law of reflection** states that the angles of incidence and reflection are equal:

$$\text{Angle of incidence } (i) = \text{Angle of reflection } (r)$$

- This law of reflection is used in many devices such as:
  - mirrors
  - cameras
  - optical fibres

- periscopes


# Reflection in a plane mirror



Your notes

- When an object is placed in front of a plane mirror, an image of that object can be seen in the mirror
- The image will be:
  - The **same size** as the object
  - The **same distance behind** the mirror as the object is in front of it
  - **Virtual**
- A **plane mirror** defines a **flat, smooth** and **polished surface**
- The formation of this image can be understood by drawing a ray diagram

## Ray diagram showing reflection in a plane mirror

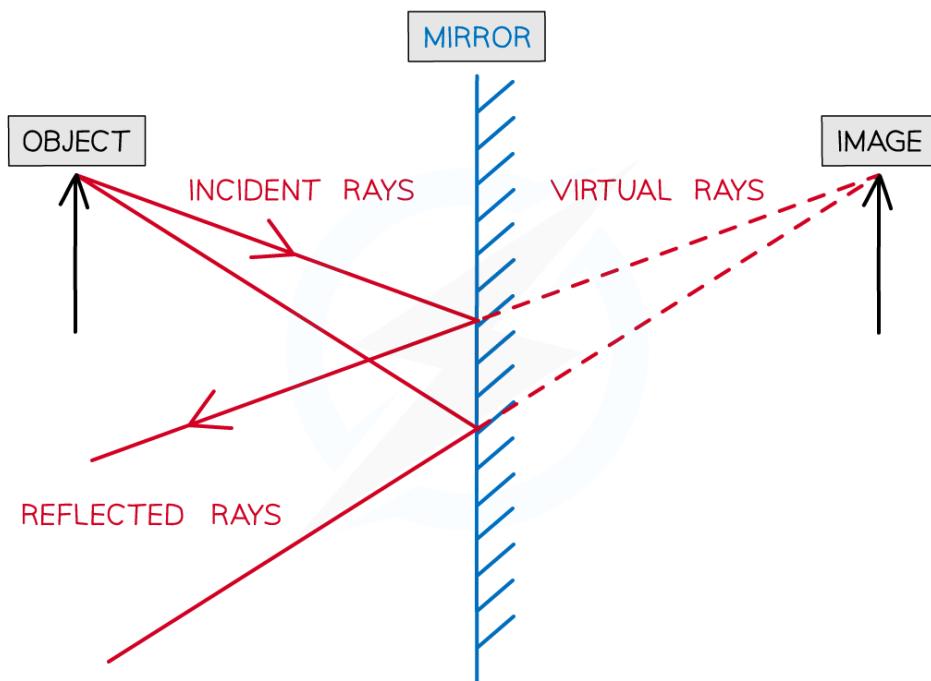

Copyright © Save My Exams. All Rights Reserved

**Diagram showing the formation of an image in a mirror by the reflection of light**

- Each incident ray on the diagram above can be drawn following these steps:
  - Light from the object hits the mirror, reflecting from it ( $i=r$ )
  - To an observer, the reflected ray appears to have come from behind the mirror
  - The reflected ray can be traced back in this same direction behind the mirror, forming a **virtual ray**

- This process is **repeated** for another ray travelling in a slightly different direction
- An image of the object will appear where these two **virtual rays cross**
- The type of image formed in the mirror is called a **virtual image** because of the divergence of the rays from the image
  - It cannot be projected onto a piece of paper (because the rays don't go through the image)



Your notes



### Examiner Tips and Tricks

When drawing light waves being reflected **take care to get the angle about right**.

If they are slightly out it won't be a problem, but if there is an obvious difference between the angle of incidence and the angle of reflection then you will probably lose a mark.



# Investigating reflection

Extended tier only

## Aims of the experiment

- To investigate reflection by a [Plane mirror](#)


## Variables

- Independent variable** = angle of incidence,  $i$
- Dependent variable** = angle of reflection,  $r$
- Control variables:
  - Distance of ray box from mirror
  - Width of the light beam
  - Same frequency / wavelength of the light

## Equipment list

| Equipment      | Purpose  |
|----------------|--|
| Ray Box        | To provide a narrow beam of light that can be easily reflected |
| Protractor     | To measure the angles of incidence and reflection              |
| Sheet of Paper | To mark the lines indicating the incident and reflected rays   |
| Pencil         | To draw the incident and reflected ray lines onto the paper    |
| Ruler          | To draw the incident and reflected ray lines onto the paper    |
| Plane mirror   | To reflect the light beam                                      |

## Method

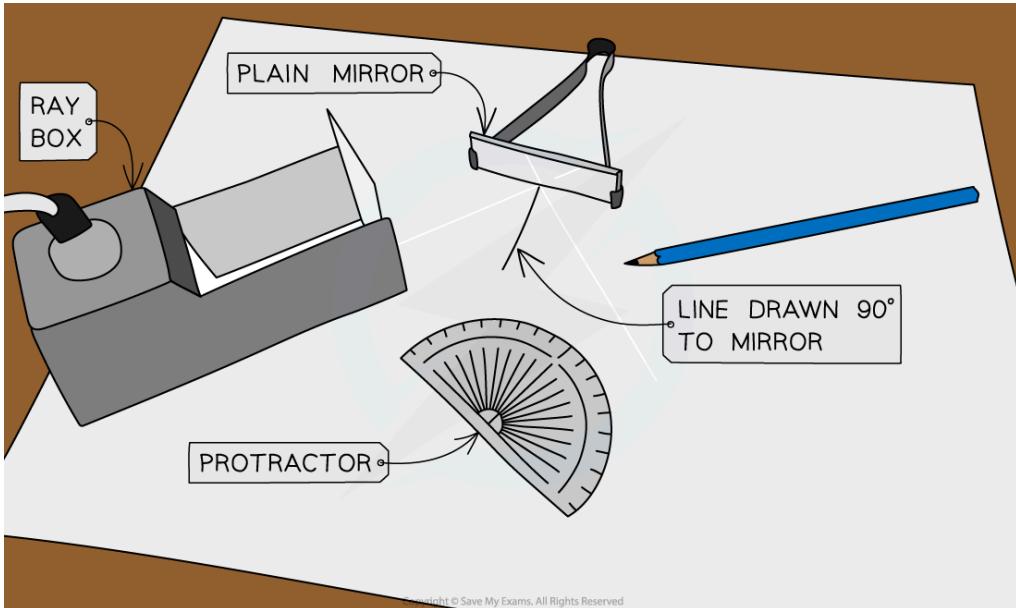

Your notes

### Apparatus to investigate reflection

1. Set up the apparatus as shown in the **diagram**
2. In the middle of the paper use a ruler to mark a straight line about **10 cm** long
3. Use a protractor to draw a **90° line** that bisects (cuts in half) the 10 cm line
4. Place the mirror on the **first line** as shown in the diagram above
5. Switch on the **ray box** and aim a beam of light at the point where the two **drawn lines cross** at an angle
6. Use the pencil to mark **two positions** of the light beam:
  - A point just after leaving the ray box
  - The point on the reflected beam about 10 cm away from the mirror
7. Remove the ray box and mirror
8. **Use a ruler** to join the two marked positions to the point where the originally drawn lines crossed
9. Use the protractor to measure the two angles from the 90° line. The angle for the ray towards the mirror is the angle of incidence, and the other is the angle of reflection
10. **Repeat** the experiment three times with the beam of light aimed at different angles

## Results

### Example results table

| Angle of incidence, $i$ ( $^{\circ}$ ) | Angle of reflection, $r$ ( $^{\circ}$ ) |
|--|---|
|  |   |

|    |  |
|----|--|
| 10 |  |
| 30 |  |
| 45 |  |
| 80 |  |



Your notes

## Analysis of results

- The law of reflection states:

$$i = r$$

- Where:

- $i$  = angle of incidence in degrees ( $^{\circ}$ )
- $r$  = angle of reflection in degrees ( $^{\circ}$ )
- If the experiment was carried out correctly, the angles of incidence and reflection should be the same

## Evaluating the experiment

### Systematic errors

- An error could occur if the  $90^{\circ}$  lines are drawn incorrectly
  - Use a set square to draw perpendicular lines
- If the mirror is distorted, this could affect the reflection angle, so make sure there are little to no blemishes on it

### Random errors

- The points for the incoming and reflected beam may be inaccurately marked
  - Use a sharpened pencil and mark in the middle of the beam
- The protractor resolution may make it difficult to read the angles accurately
  - Use a protractor with a higher resolution

## Safety considerations

- The ray box light could cause **burns** if touched
  - Run burns under cold running water for at least five minutes
- Looking directly into the light may **damage the eyes**
  - Avoid looking directly at the light
  - Stand behind the ray box during the experiment

- Keep all **liquids** away from the electrical equipment and paper
- Take care using the **mirror**
  - Damages on the mirror can affect the outcome of the reflection experiment




Your notes



# Ray diagrams for refraction

- In refraction, angles are measured between the ray (showing the direction of the wave) and the normal line
  - The angle of the wave approaching the boundary is called the **angle of incidence ( $i$ )**
  - The angle of the wave leaving the boundary is called the **angle of refraction ( $r$ )**
- When drawing a ray diagram an arrow is used to show the direction the wave is travelling
  - An **incident** ray has an arrow pointing **towards** the boundary
  - A **refracted** ray has an arrow pointing **away** from the boundary
- The **angles of incidence** and **refraction** are usually labelled  $i$  and  $r$  respectively

## Refraction ray diagram

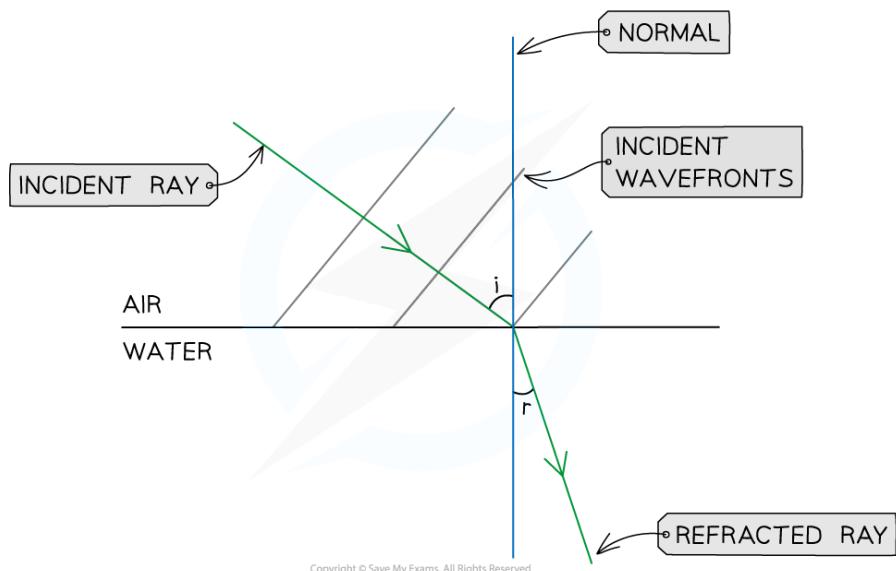

# Refraction of light


- **Refraction** occurs when light passes a **boundary** between two different **transparent** materials
  - At the boundary, the rays of light change **direction**
- This change in direction depends on the difference in **optical density** between the two media:

- From **less dense to more dense** (e.g. air to glass), light bends **towards the normal**
- From **more dense to less dense** (e.g. glass to air), light bends **away from the normal**
- When passing along the **normal** (perpendicular) the light **does not bend** at all
- Note that when a light wave enters and leaves the glass block there are **two** boundaries
- The **refracted** ray at the **first** boundary becomes the **incident** ray at the **second** boundary



Your notes

## Refraction diagram of light from air through a glass block

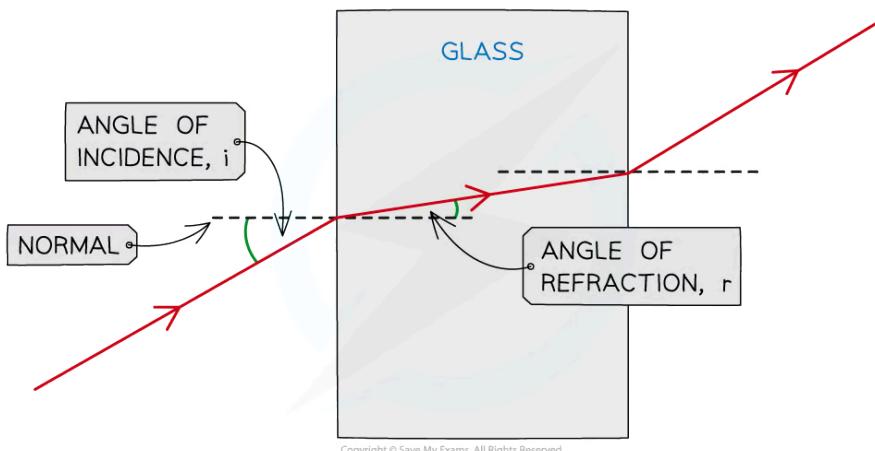

**How to construct a ray diagram showing the refraction of light as it passes through a rectangular block**

- The **change in direction** occurs due to the **change in speed** when travelling in different substances
  - When light passes into a more optically dense substance, the waves will **slow down**; hence, they bend **towards the normal**
  - When light passes into a less optically dense substance, the waves will **speed up**; hence, they bend **away from the normal**
- The only properties that **change** during refraction are **speed and wavelength** – the frequency of waves **does not change**
  - Different frequencies account for different **colours** of light (red has a low frequency, whilst blue has a high frequency)
  - When light refracts, **it does not change colour** (think of a pencil in a glass of water), therefore, the frequency does not change



### Examiner Tips and Tricks

Practice drawing refraction diagrams as much as you can! It's very important to remember which way the light bends when it crosses a boundary:

As the light **enters** the block it bends **towards** the normal line



Your notes

**Remember: Enters Towards**

When it **leaves** the block it bends **away** from the normal line

**Remember: Leaves Away**

You only need to know about light passing through the boundaries between **two** media.

## Investigating Refraction

### Aims of the experiment

- To investigate the refraction of light using rectangular blocks, semi-circular blocks and triangular prisms

### Variables

- Independent variable** = shape of the block
- Dependent variable** = angle of refraction
- Control variables:
  - Width of the light beam
  - Same frequency / wavelength of the light

### Equipment list

| Equipment      | Purpose  |
|----------------|--|
| Ray box        | To provide a narrow beam of light that can be easily refracted |
| Protractor     | To measure the angles of incidence and refraction              |
| Sheet of paper | To mark the lines indicating the incident and refracted rays   |
| Pencil         | To draw the incident and refracted ray lines onto the paper    |
| Ruler          | To draw the incident and refracted ray lines onto the paper    |

Perspex blocks (rectangular, semi-circular & prism)

To refract the light beam



Your notes

- **Resolution** of measuring equipment:

- Protractor =  $1^\circ$
- Ruler = 1 mm

## Refraction diagram for equipment

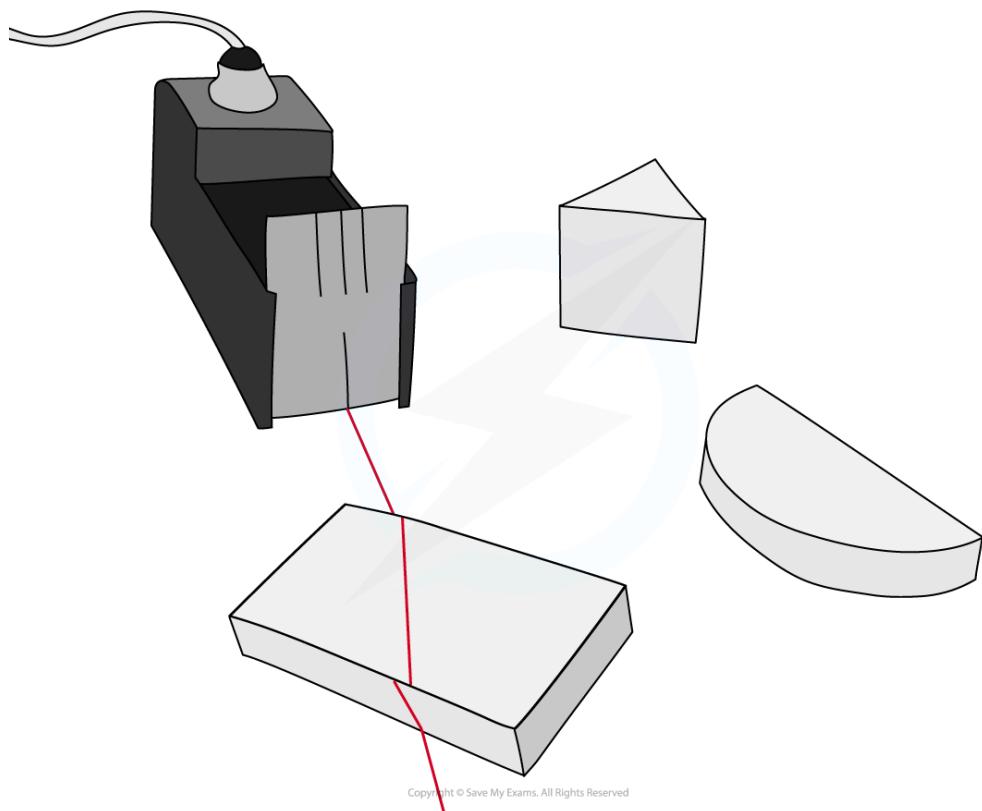



Diagram showing a ray box alongside three different-shaped glass blocks

## Method

### Refraction diagram set up



Your notes

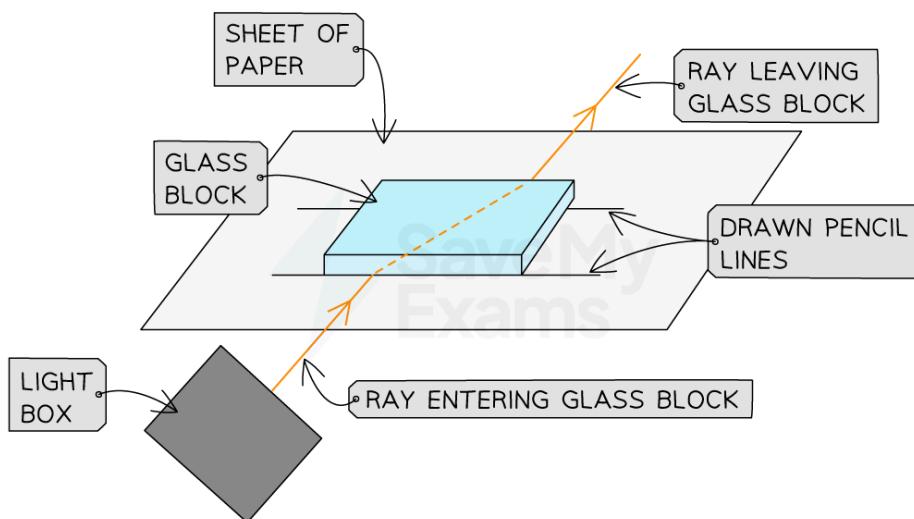

Copyright © Save My Exams. All Rights Reserved

### Apparatus to investigate refraction


1. Place the glass block on a sheet of paper, and carefully draw around the rectangular perspex block using a pencil
2. Switch on the ray box and direct a beam of light at the side face of the block
3. Mark on the paper:
  - A point on the ray close to the ray box
  - The point where the ray enters the block
  - The point where the ray exits the block
  - A point on the exit light ray which is a distance of about 5 cm away from the block
4. Draw a dashed line normal (at right angles) to the outline of the block where the points are
5. Remove the block and join the points marked with three straight lines
6. Replace the block within its outline and repeat the above process for a ray striking the block at a different angle
7. Repeat the procedure for each shape of perspex block (prism and semi-circular)

## Analysis of results


- Consider the light paths through the different-shaped blocks

## Refraction experiment results with different media





### SEMI-CIRCULAR BLOCK



### RECTANGULAR BLOCK



### PRISM BLOCK



Copyright © Save My Exams. All Rights Reserved

### Refraction of light through different shapes of perspex blocks

- The final diagram for each shape will include multiple light ray paths for the different angles of incidences (*i*) at which the light strikes the blocks
- This will help demonstrate how the angle of refraction (*r*) changes with the angle of incidence
  - Label these paths clearly with (1) (2) (3) or **A**, **B**, **C** to make these clearer
- Use the laws of refraction to analyse these results

## Evaluating the experiment

### Systematic errors

- An error could occur if the 90° lines are drawn incorrectly
  - Use a set square to draw perpendicular lines

### Random errors

- The points for the incoming and reflected beam may be inaccurately marked
  - Use a sharpened pencil and mark in the middle of the beam
- The protractor resolution may make it difficult to read the angles accurately
  - Use a protractor with a higher resolution

## Safety considerations

- The ray box light could cause burns if touched
  - Run burns under cold running water for at least five minutes

- Looking directly into the light may damage the eyes
  - Avoid looking directly at the light
  - Stand behind the ray box during the experiment
- Keep all liquids away from the electrical equipment and paper



Your notes



### Examiner Tips and Tricks

In your examination, you might be asked to write a method explaining how you might investigate the refraction of light through different shaped blocks

As part of this method you should describe:

- What equipment you need
- How you will use the equipment
- How you will trace the rays of light before, while and after they pass through the block



# Refractive index as a ratio of speed

Extended tier only

- The refractive index can be calculated in two different ways:
  1. Using the **ratio of speeds**
  2. Using the **ratio of angles**
- The refractive index is a number that is **always larger than 1** and is different for different materials
  - Objects which are more **optically dense** have a **higher** refractive index, e.g.  $n$  is about 2.4 for diamond
  - Objects which are less **optically dense** have a **lower** refractive index, e.g.  $n$  is about 1.5 for glass
- Since the refractive index is a **ratio**, it has **no units**
- The refractive index,  $n$ , for the ratio of speeds, is defined as:

**The ratio of the speeds of a wave in two different regions**

- The refractive index,  $n$ , for the ratio of speeds, is given by the equation:

$$n = \frac{\text{speed of light in a vacuum}}{\text{speed of light in a material}}$$

# Refractive index as a ratio of angles

Extended tier only

- The refractive index,  $n$ , for the ratio of angles, is defined as:

**The ratio of the sine of the angle of incidence and the sine of the angle of refraction of a wave in two different regions**

- The refractive index,  $n$ , for the ratio of angles, is given by the equation:

$$n = \frac{\sin i}{\sin r}$$

- Where:


- $n$  = the refractive index of the material
- $i$  = angle of incidence of the light ( $^{\circ}$ )
- $r$  = angle of refraction of the light ( $^{\circ}$ )

- This equation can be rearranged with the help of the formula triangle:

## A refractive index formula triangle



Your notes

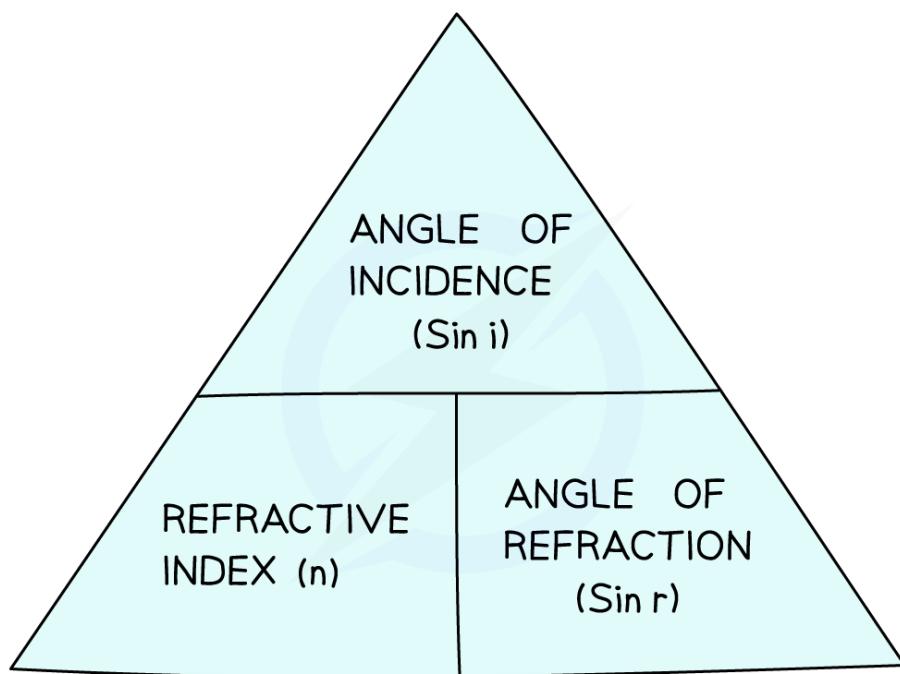

Copyright © Save My Exams. All Rights Reserved

### Formula triangle for the refractive index in terms of angles

- See the example of [Speed & velocity](#) which explains how to use the formula triangle to rearrange equations



### Worked Example

A ray of light enters a glass block of refractive index 1.53 making an angle of  $15^\circ$  with the normal before entering the block.

Calculate the angle it makes with the normal after it enters the glass block.

**Answer:**

#### Step 1: List the known quantities

- Refractive index of glass,  $n = 1.53$
- Angle of incidence,  $i = 15^\circ$

#### Step 2: Write the equation for refractive index in terms of the ratio of angles

$$n = \frac{\sin i}{\sin r}$$

### Step 3: Rearrange the equation and calculate sin (r)



Your notes

$$\sin r = \frac{\sin i}{n}$$

$$\sin r = \frac{\sin 15}{1.53}$$

$$\sin r = 0.1692$$

### Step 4: Find the angle of refraction (r) by using the inverse sin function

$$r = \sin^{-1}(0.1692)$$

$$r = 9.7 = 10^\circ$$



### Examiner Tips and Tricks

$n = \frac{\sin i}{\sin r}$  is also known as Snell's law but you do not need to know this for your exam.

**Important:**  $(\frac{\sin i}{\sin r})$  is not the same as  $(\frac{i}{r})$ . Incorrectly cancelling the sin terms is a very common mistake!

When calculating the value of  $i$  or  $r$  start by calculating the value of  $\sin i$  or  $\sin r$ .

You can then use the **inverse sin** function ( $\sin^{-1}$  on most calculators by pressing 'shift' then 'sine') to find the angle.


One way to remember which way around  $i$  and  $r$  are in the fraction is remembering that 'i' comes before 'r' in the alphabet, and therefore is on the top of the fraction (whilst  $r$  is on the bottom).



# Total internal reflection

- Total internal reflection (TIR) occurs at the boundary between two media when:
  - All the incident ray in medium 1 is reflected back into medium 1
- When light passes between the boundary of an optically **dense** to a **less dense** medium and the **angles of incidence are small**
  - The **refracted ray** is **strong**
  - The **reflected ray** is **weak**
- The weak ray is reflected back into the **denser medium**
  - This means **some internal reflection** occurs
- It is not TIR because not all of the ray is reflected, only **some** of it

## Comparing refraction and total internal reflection

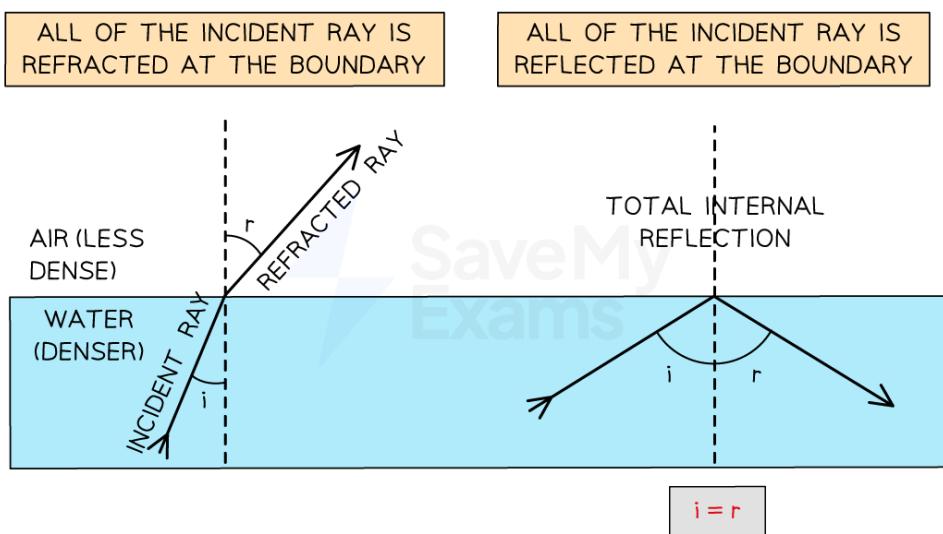

Copyright © Save My Exams. All Rights Reserved


Refraction happens when the angle of incidence is smaller and total internal reflection happens when the angle of incidence equals the angle of reflection

## Comparing internal reflection and total internal reflection

- Normal reflection produces a less intense light compared to TIR
  - In TIR the light ray is **brighter** and more intense
- Normal reflection occurs **independent** of the **refractive indices** of both media

- For TIR to occur, the incident material must be **denser** than the second material

## Conditions for internal reflection

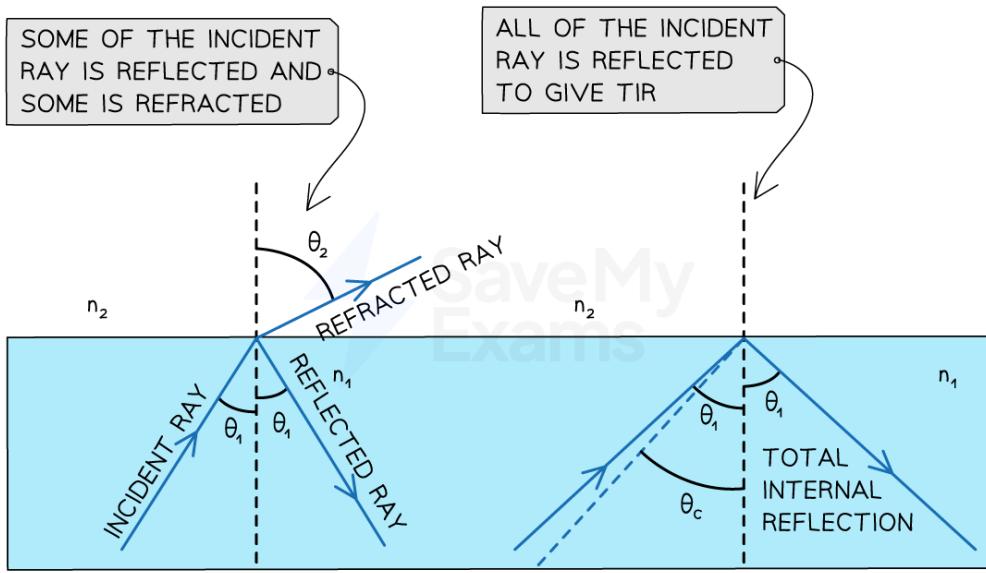

Total internal reflection happens with the angle of incidence is bigger than the critical angle

## Internal reflection examples

- Thin film interference** is an example of **internal reflection**
- An example of this is the shiny side of a CD

## Example of internal reflection




## The colourful pattern observed on a CD is a result of thin film interference



Your notes

- Other examples of thin film interference include:
  - Soap bubbles
  - Thin layers of oil on water
- In these examples, internal reflection occurs at the boundaries between:
  - Air and water
  - Water and oil
- A spectrum of colours will be seen by the observer due to the rays partially reflected at the boundary

## A ray diagram of an example of internal reflection

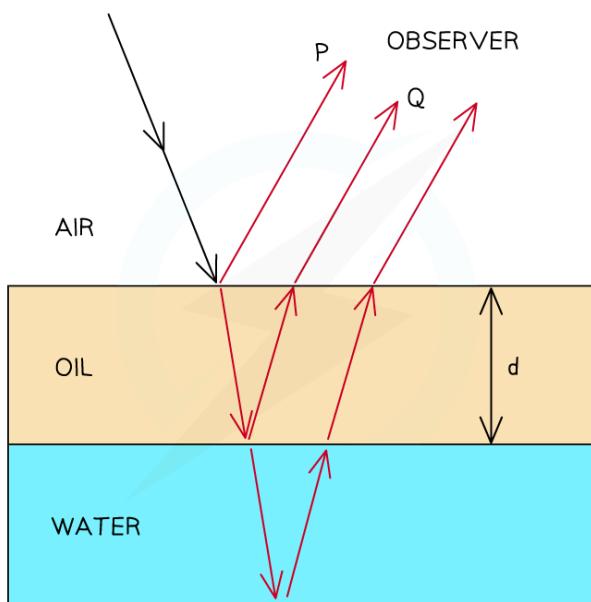

Copyright © Save My Exams. All Rights Reserved

Light is reflected and transmitted at the boundary from a less dense to a more dense material. Light is transmitted only at the boundary from a more dense to a less dense material. Hence, in this diagram P and Q exist but the third unlabelled ray does not.


## Total internal reflection examples

- Total internal reflection is used to reflect light along **optical fibres**, meaning they can be used for
  - communications
  - endoscopes
  - decorative lamps

- Light travelling down an optical fibre is totally internally reflected each time it hits the edge of the fibre



## Total internal reflection example: optical fibre

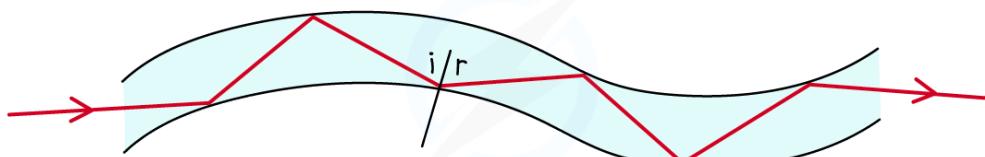


Copyright © Save My Exams. All Rights Reserved

**Optical fibres utilise total internal reflection for communications**

- Prisms are used in a variety of optical instruments, including:
  - Periscopes
  - Binoculars
  - Telescopes
  - Cameras
  - Safety reflectors
- A **periscope** is a device that can be used to see over tall objects
  - It consists of two right-angled prisms

## Total internal reflection example: a periscope

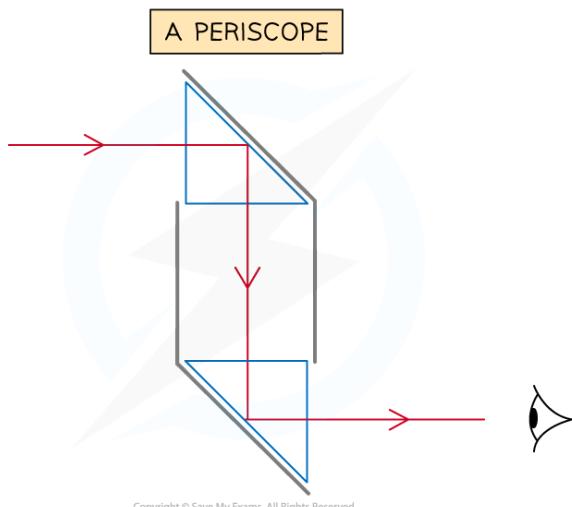

Copyright © Save My Exams. All Rights Reserved

**Reflection of light through a periscope**

- The light totally internally reflects in both prisms



## Examiner Tips and Tricks

If asked to name the phenomena make sure you give the whole name – **total internal reflection**

**Remember:** total internal reflection occurs when light travels from a denser material to less dense material and **ALL** of the light is reflected.

If asked to give an example of a use of total internal reflection, first state the name of the object that causes the reflection (e.g. a right-angled prism) and then name the device in which it is used (e.g. a periscope)




Your notes

## Critical angle

- At the boundary between a more dense and a less dense medium, as the angle of incidence is increased, the angle of refraction also increases until it gets closer to  $90^\circ$
- When the angle of refraction is exactly  $90^\circ$  the light is refracted along the boundary
  - At this point, the angle of incidence is known as the **critical angle  $c$**

## Obtaining total internal reflection examples

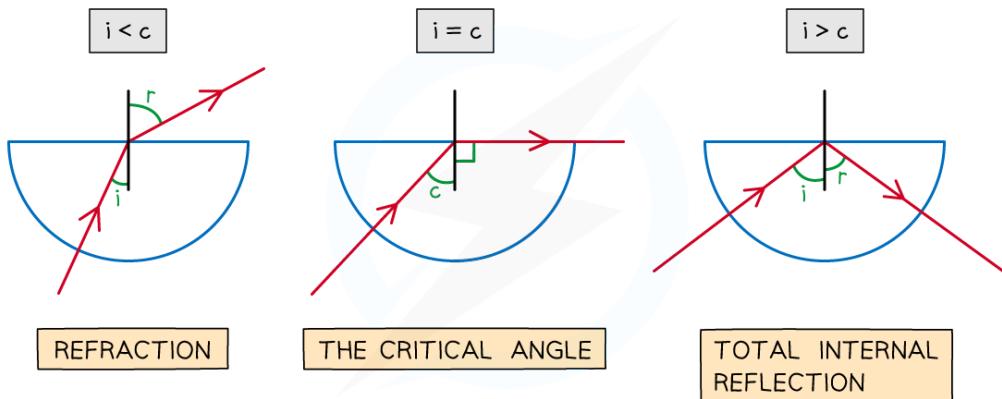

Copyright © Save My Exams. All Rights Reserved


**As the angle of incidence increases it will eventually surpass the critical angle and lead to total internal reflection of the light**

- When the angle of incidence is larger than the critical angle, the refracted ray is now **reflected**
  - This is **total internal reflection**




## Worked Example

A glass cube is held in contact with a liquid and a light ray is directed at a vertical face of the cube. The angle of incidence at the vertical face is  $39^\circ$  and the angle of refraction is  $25^\circ$  as shown in the diagram. The light ray is totally internally reflected for the first time at X.




Your notes

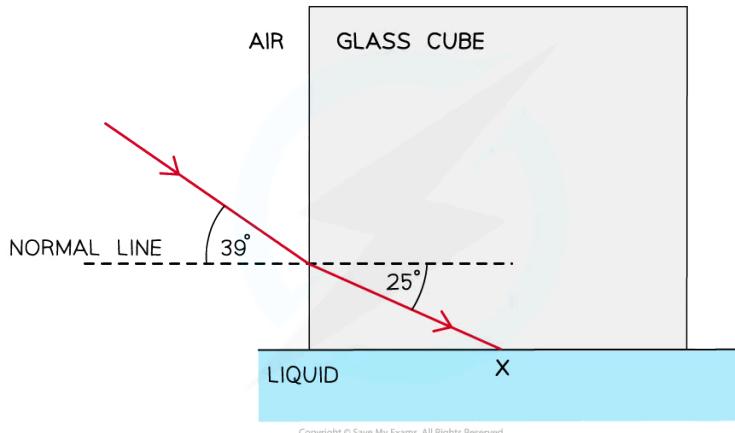

Complete the diagram to show the path of the ray beyond X to the air and calculate the critical angle for the glass-liquid boundary.

**Answer:**

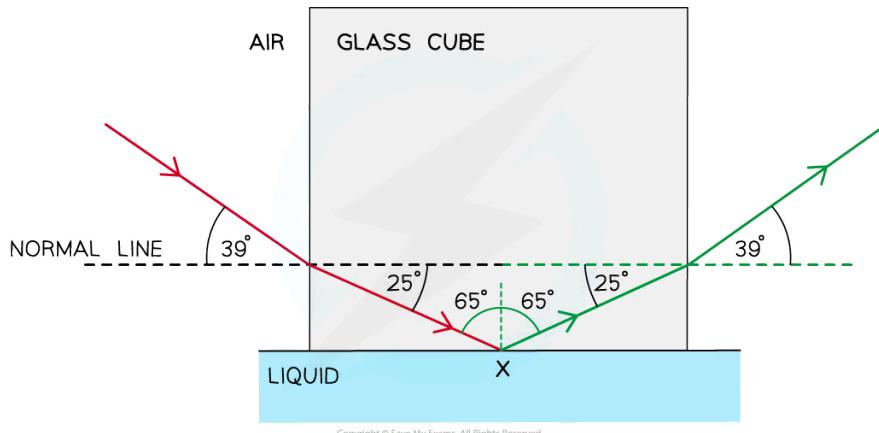

#### Step 1: Draw the reflected angle at the glass–liquid boundary

- When a light ray is reflected, the angle of incidence = angle of reflection
- Therefore, the angle of incidence (or reflection) is  $90^\circ - 25^\circ = 65^\circ$

#### Step 2: Draw the refracted angle at the glass–air boundary

- At the glass-air boundary, the light ray refracts **away** from the normal
- Due to the reflection, the light rays are symmetrical to the other side

#### Step 3: Calculate the critical angle



Your notes

- The question states the ray is “totally internally reflected for the first time” meaning that this is the lowest angle at which TIR occurs
- Therefore,  $65^\circ$  is the critical angle



### Examiner Tips and Tricks

If you are asked to explain what is meant by the critical angle in an exam, you can be sure to gain full marks by drawing and labelling the same diagram above (showing the three semi-circular blocks)

## Refractive index & critical angle equation

Extended tier only

- The critical angle,  $c$ , of a material, is related to its **refractive index**,  $n$
- The relationship between the two quantities is given by the equation:

$$\sin c = \frac{1}{n}$$

- This can also be rearranged to calculate the refractive index,  $n$ :

$$n = \frac{1}{\sin c}$$

- This equation shows that:
  - The larger the **refractive index** of a material, the smaller the **critical angle**
  - Light rays inside a material with a **high refractive index** are more likely to be **totally internally reflected**



### Worked Example

Opals and diamonds are transparent stones used in jewellery. Jewellers shape the stones so that light is reflected inside. Compare the critical angles of opal and diamond and explain which stone would appear to sparkle more.

The refractive index of opal is about 1.5

The refractive index of diamond is about 2.4

**Answer:**

### Step 1: List the known quantities

- Refractive index of opal,  $n_o = 1.5$
- Refractive index of diamond,  $n_d = 2.4$



### Step 2: Write out the equation relating critical angle and refractive index

$$\sin c = \frac{1}{n}$$

### Step 3: Calculate the critical angle of opal ( $c_o$ )

$$\sin(c_o) = \frac{1}{1.5} = 0.6667$$

$$c_o = \sin^{-1}(0.6667) = 41.8 = 42^\circ$$

### Step 4: Calculate the critical angle of diamond ( $c_d$ )

$$\sin(c_d) = \frac{1}{2.4} = 0.4167$$

$$c_d = \sin^{-1}(0.4167) = 24.6 = 25^\circ$$

### Step 5: Compare the two values and write a conclusion

- Total internal reflection occurs when the angle of incidence of light is **larger** than the critical angle ( $i > c$ )
- In opal, total internal reflection will occur for angles of incidence between  $42^\circ$  and  $90^\circ$
- The critical angle of diamond is **lower** than the critical angle of opal ( $c_o > c_d$ )
- This means light rays will be totally internally reflected in diamond over a **larger** range of angles ( $25^\circ$  to  $90^\circ$ )
- Therefore, more total internal reflection will occur in diamond hence it will appear to sparkle more than the opal



### Examiner Tips and Tricks

When calculating the value of the critical angle using the above equation:

- First use the refractive index,  $n$ , to find  $\sin(c)$
- Then use the **inverse** sin function ( $\sin^{-1}$ ) to find the value of  $c$

## Optical fibres



### Extended tier only

- Optical fibres have many uses, particularly in telecommunications
- **Endoscopes** are used to look within the human body

- A camera on the end of an optical fibre is placed down the throat and moved into the stomach
- Light from inside the stomach is captured by the camera, is totally internally reflected along the optical fibre and viewed by doctors through the eyepiece



### Total internal reflection example: endoscope

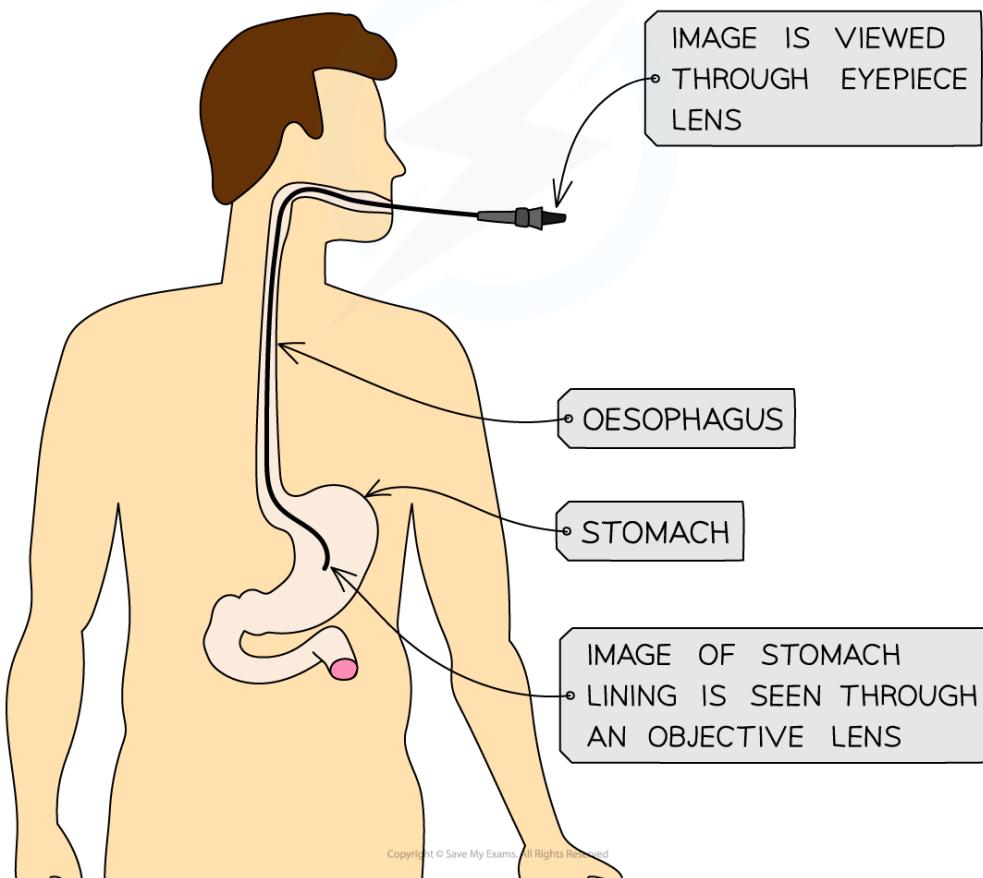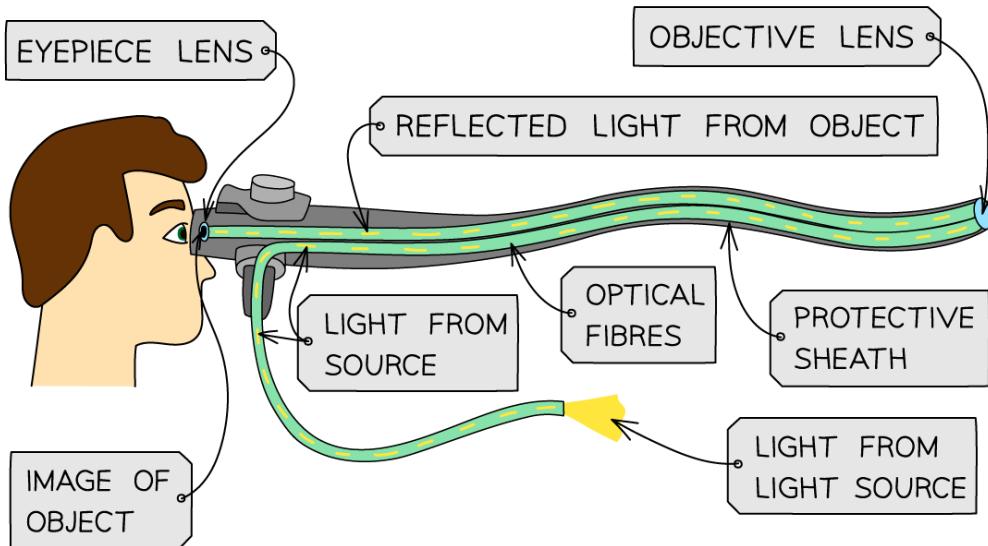




Your notes

## Total internal reflection using telecommunication

- Optical fibres can be used to transmit:
  - Home (landline) telephone signals
  - Internet signals
  - Cable television signals
- In phone calls from landline phones:
  - Electrical signals are converted to **light pulses**
  - That travel close to the speed of light along optical fibres
  - At the receiving end, the digital signal is converted into **sound**

### Total internal reflection example: landline telephone signal path

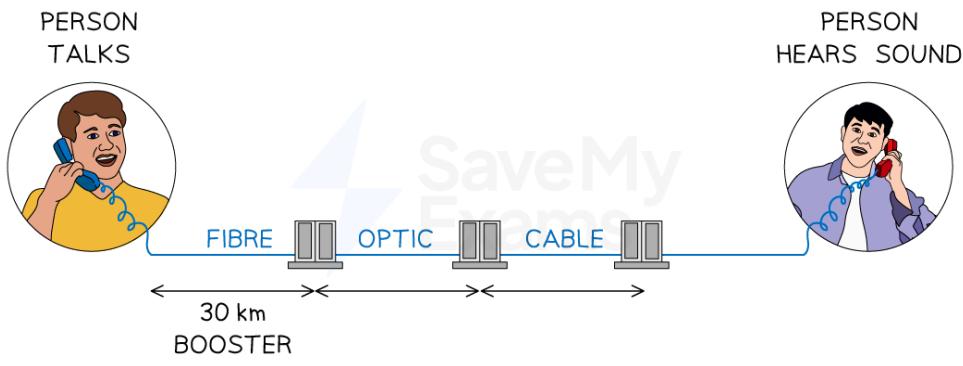

Sound from a landline telephone travels through optical fibres to the landline of the person listening

- Optical fibres are installed:
  - In cables attached to telephone (or telegraph) poles in the street
  - Underground from the service box to the telegraph pole or under the sea

### Total internal reflection example: telegraph poles



Your notes



Copyright © Save My Exams. All Rights Reserved

**Fibre optic cables can be found in the phone cables attached between the telephone poles and the street**



# Features of ray diagrams

- Ray diagrams can be described using the following terms:

- Principal axis
- Principal focus, or focal point
- Focal length

- The principal axis is defined as:

**A line which passes through the centre of a lens**

- The principal focus, or focal point, is defined as:

**The point at which rays of light travelling parallel to the principal axis intersect the principal axis and converge or the point at which diverging rays appear to proceed**

- Focal length is defined as:

**The distance between the centre of the lens and the principal focus**

# Converging & Diverging Lenses

- A lens is a piece of equipment that forms an image by **refracting** light
- There are two types of lens:
  - Converging
  - Diverging


## Converging lenses

- In a converging lens, parallel rays of light are brought to a focus
  - This point is called the **principal focus**
- This lens is sometimes referred to as a **convex** lens
- The distance from the lens to the principal focus is called the **focal length**
  - This depends on how **curved** the lens is
  - The **more curved** the lens, the **shorter** the focal length

## Converging lens diagram



Your notes

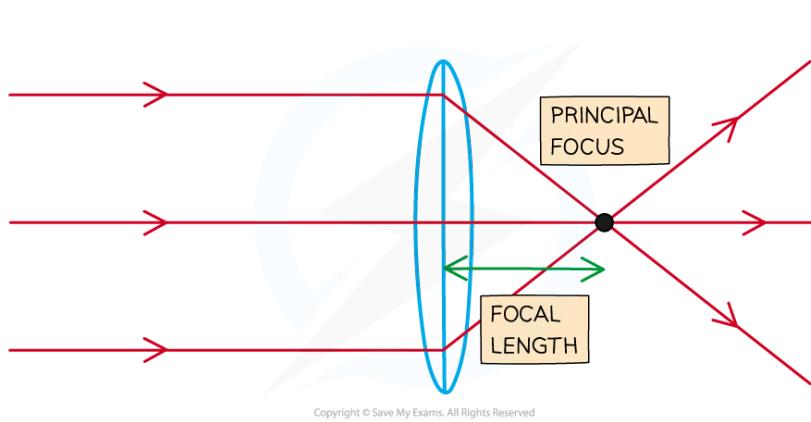


**The focal length is the distance from the lens to the principal focus**

## Diverging lenses

- In a diverging lens, parallel rays of light are made to diverge (spread out) from a point
  - This lens is sometimes referred to as a **concave** lens
- The principal focus is now the point from which the rays appear to diverge from

## Diverging lens diagram

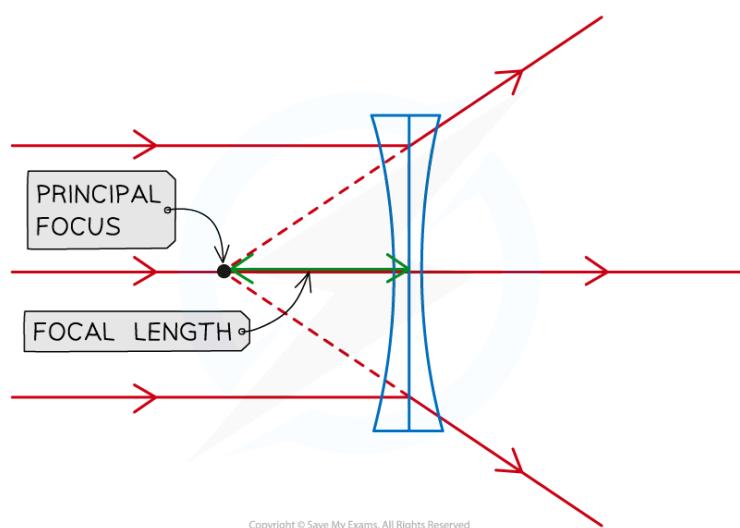

**Parallel rays from a diverging lens appear to come from the principal focus**

## Representing lenses


- In diagrams, the following symbols are often used to represent each type of lens:

## Converging and diverging lens symbols




Your notes

## CONVEX LENSES



## CONCAVE LENSES



Copyright © Save My Exams. All Rights Reserved



### Concave and convex lens symbols



#### Examiner Tips and Tricks

To remember which lens is converging or diverging, think of the following: Convex lens = Converging. You need to be able to describe how the lenses affect the light rays.



# Real images & virtual images

- Images produced by lenses can be one of two types:
  - A real image
  - A virtual image
- Images can be described **compared to their object** as:
  - Enlarged/same size/diminished
  - Upright/inverted
  - Real/virtual


## Real images

- A real image is defined as:

An image that is formed when the light rays from an object converge and meet each other  
and can be projected onto a screen

- A real image is one produced by the **convergence** of light towards a focus
- Real images are always **inverted**
- Real images can be projected onto pieces of paper or screens
  - An example of a real image is the image formed on a cinema screen

### A real image

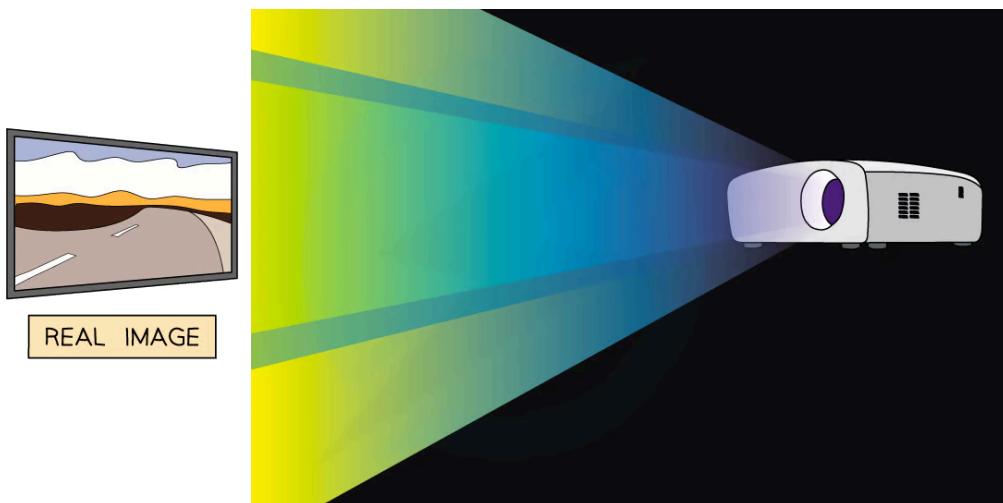

*A real image can be projected onto a screen*

# Virtual images



Your notes

- A virtual image is defined as:

An image that is formed when the light rays from an object do not meet but appear to meet behind the lens and cannot be projected onto a screen

- A virtual image is formed by the **divergence** of light away from a point
- Virtual images are always **upright**
- Virtual images **cannot** be projected onto a piece of paper or a screen
  - An example of a virtual image is a person's reflection in a mirror

## A virtual image



A reflection in a mirror is an example of a virtual image




# Converging lens – real image


## Constructing converging ray diagrams

- The three main rules for constructing ray diagrams are as follows:

1. Rays passing through the principal axis will pass through the optical centre of the lens undeviated

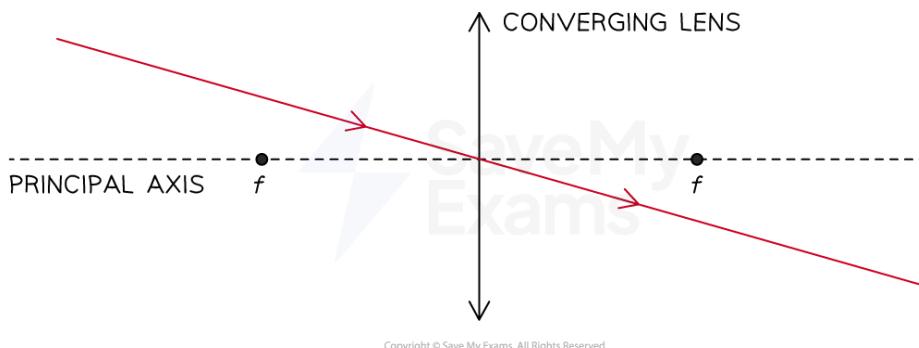


2. Rays that are parallel to the principal axis will be refracted and pass through the focal point f

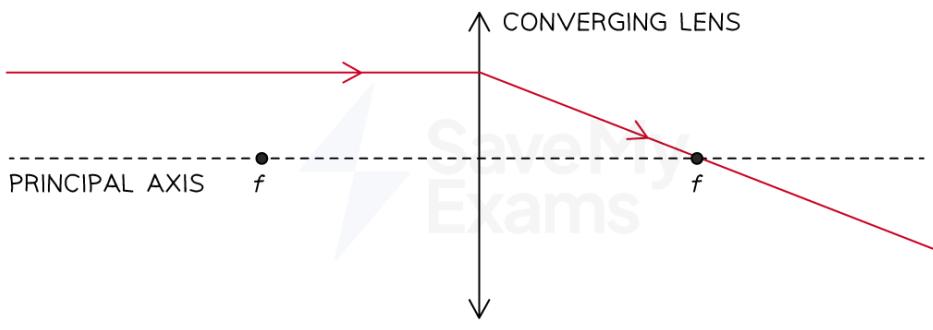

3. Rays passing through the focal point f will emerge parallel to the principal axis




Your notes

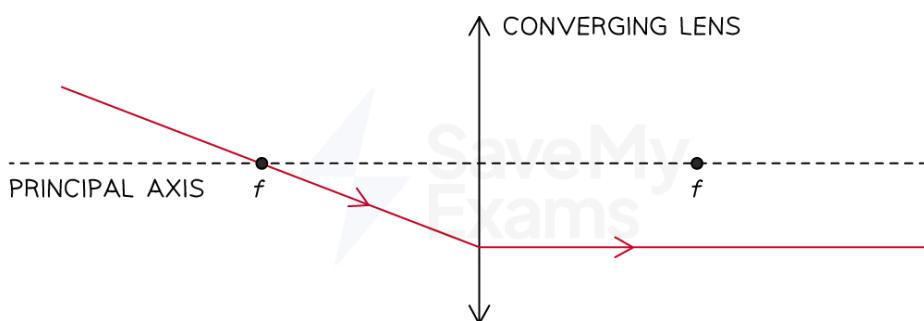

Copyright © Save My Exams. All Rights Reserved

## Drawing converging ray diagrams of real images

### Object placed beyond $2f$

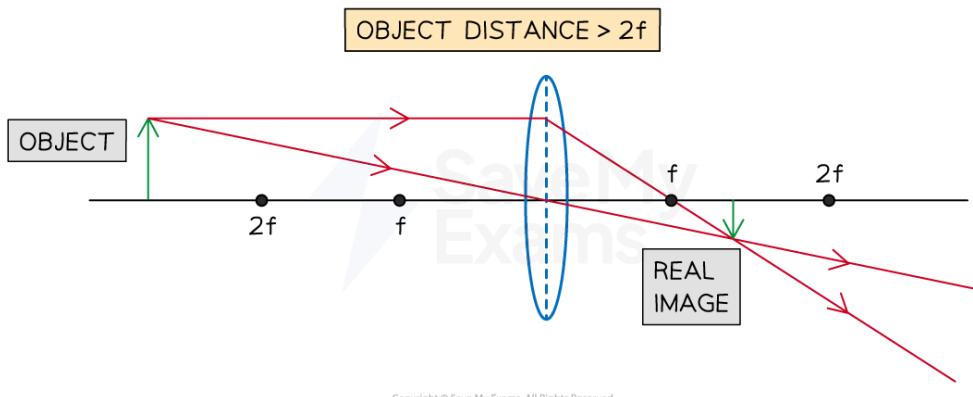

Copyright © Save My Exams. All Rights Reserved


- When an **object** is placed **beyond  $2f$**  (to the left of the lens), the **image** that forms (to the right of the lens) will have the following properties:

|                                    |                      |
|------------------------------------|----------------------|
| The image forms...                 | between $f$ and $2f$ |
| The nature of the image is...      | real                 |
| The orientation of the image is... | inverted             |
| The size of the image is...        | diminished           |

### Object placed at $2f$




Your notes

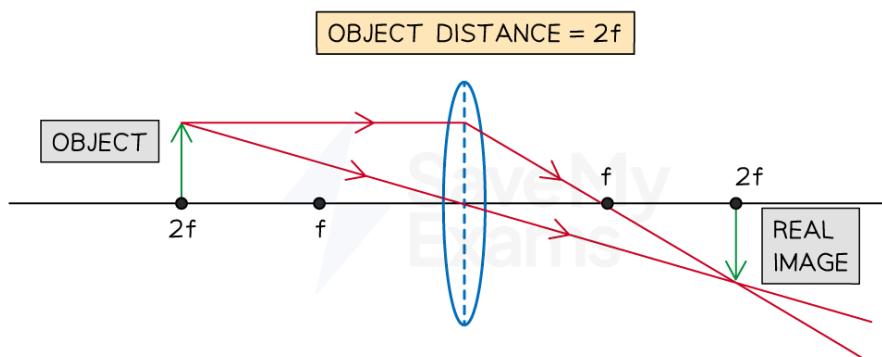

- When an **object** is placed at  $2f$  (to the left of the lens), the **image** that forms (to the right of the lens) will have the following properties:

|                                    |          |
|------------------------------------|----------|
| The image forms...                 | at $2f$  |
| The nature of the image is...      | real     |
| The orientation of the image is... | inverted |
| The size of the image is...        | the same |

## Object placed between $f$ and $2f$

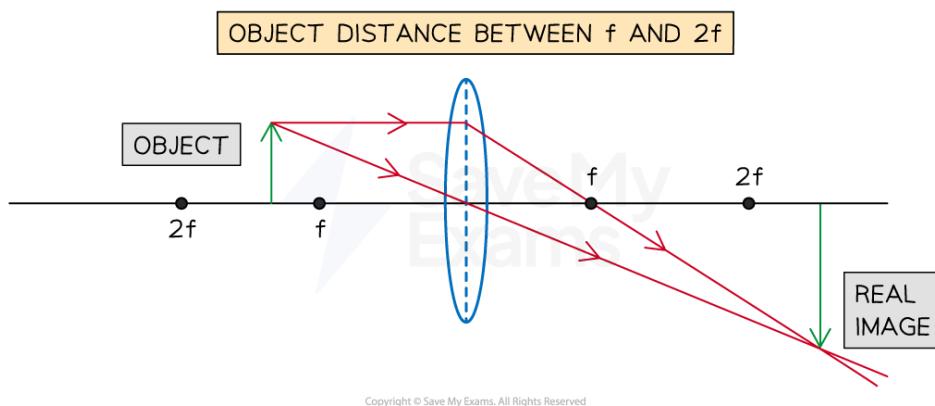

- When an **object** is placed **between  $f$  and  $2f$**  (to the left of the lens), the **image** that forms (to the right of the lens) will have the following properties:

|                               |             |
|-------------------------------|-------------|
| The image forms...            | beyond $2f$ |
| The nature of the image is... | real        |

|                                    |           |
|------------------------------------|-----------|
| The orientation of the image is... | inverted  |
| The size of the image is...        | magnified |



Your notes




### Worked Example

Draw a ray diagram to show how a converging lens can be used to form a diminished image of a real object.

Label the object, image and principal foci of the lens on your diagram.


**Answer:**

**Step 1: Start by drawing and labelling a principal axis and the lens as a line or a very thin ellipse**

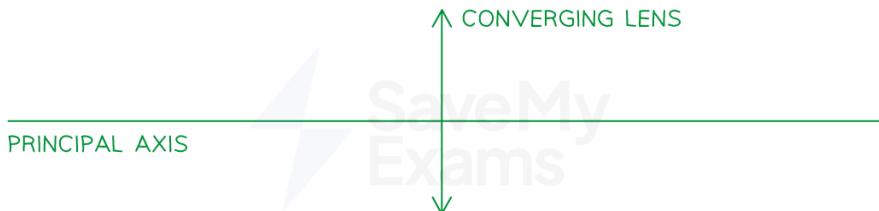

Copyright © Save My Exams. All Rights Reserved

**Step 2: Mark and label the focal points on each side of the lens**

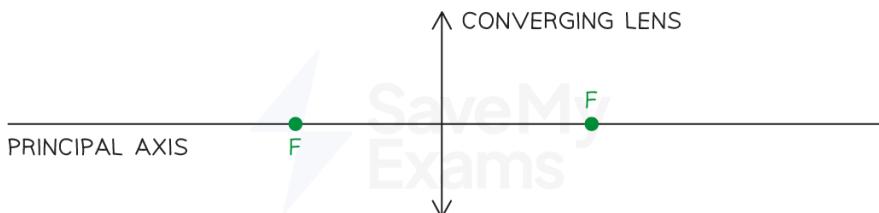


Copyright © Save My Exams. All Rights Reserved

**Step 3: Draw and label the object at a distance greater than the focal length on the left side of the lens**




Your notes

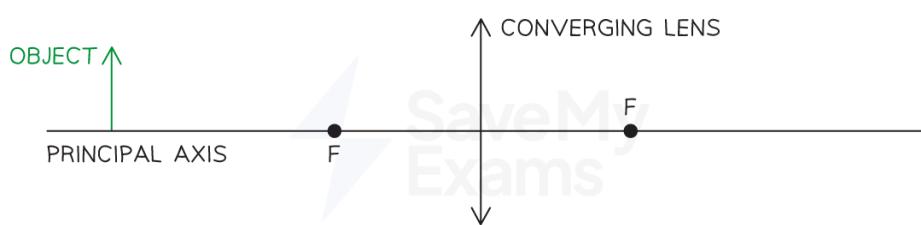

Copyright © Save My Exams. All Rights Reserved


- Tip: For a diminished image the object should be placed a distance of at least  $2F$  away from the lens

**Step 4: Draw a ray through the optical centre of the lens**

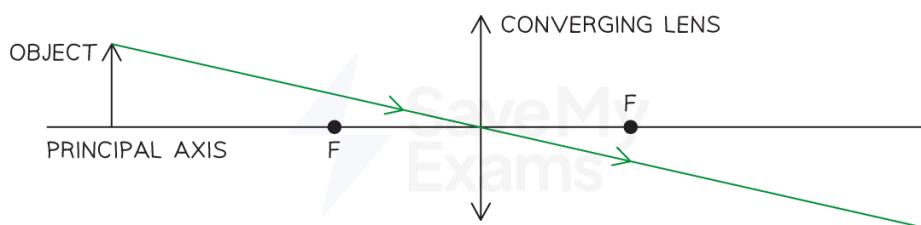


Copyright © Save My Exams. All Rights Reserved

**Step 5: Draw a second ray from the object to the lens which is parallel to the principal axis**

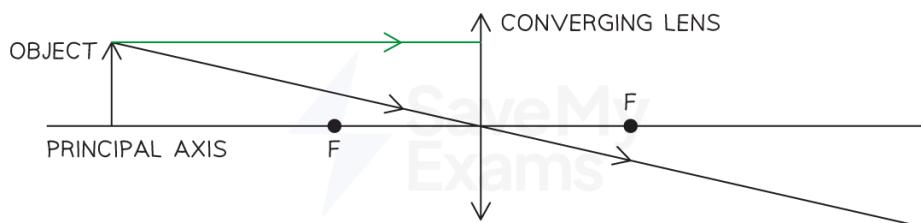

Copyright © Save My Exams. All Rights Reserved

**Step 6: Draw the continuation of the ray passing through the focal point on the right side of the lens**

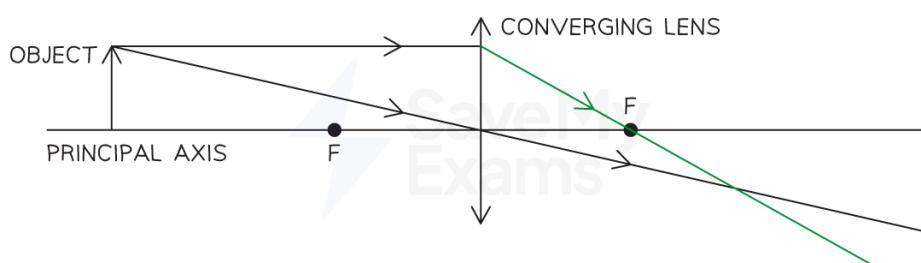


Copyright © Save My Exams. All Rights Reserved

**Step 7: Draw and label the image at the point where the rays meet**




Your notes

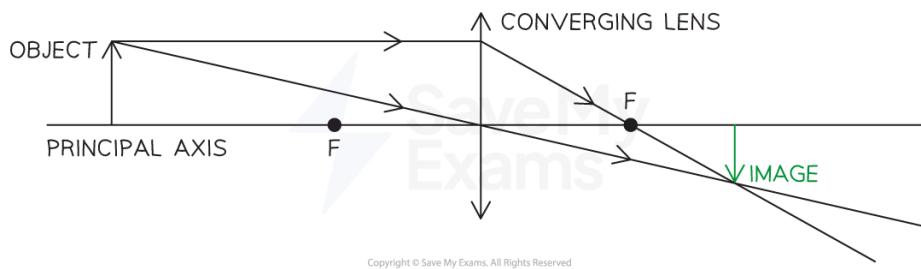

Copyright © Save My Exams. All Rights Reserved

**Step 8: Check your final image and make sure everything is included to gain the marks**

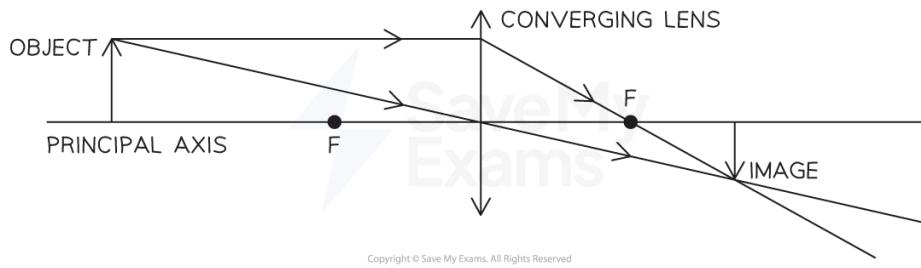

Copyright © Save My Exams. All Rights Reserved

- For a three-mark question, examiners will be looking for:
  - One ray drawn through the optical centre of the lens
  - A second ray drawn which produces a diminished (smaller) image (which must pass through a labelled focal point)
  - Both the object and the image must be drawn and labelled correctly




# Converging lens – virtual image

Extended tier only

## Constructing converging ray diagrams of virtual images

- A single lens placed at a distance **less than** the focal length of an object can be used as a magnifying glass

### A converging lens ray diagram for an object placed less than $f$

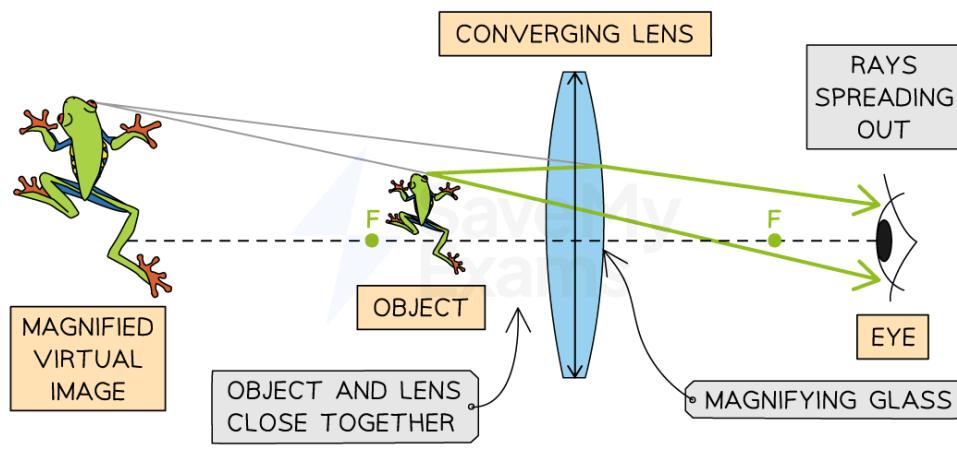

**Ray diagram showing light converging through a magnifying glass to form a magnified virtual image**

- The image that forms will have the following properties:

|                                    |  |
|------------------------------------|--|
| The image forms...                 | at $2f$ (on the same side as the object) |
| The nature of the image is...      | virtual                                  |
| The orientation of the image is... | upright                                  |
| The size of the image is...        | magnified                                |

# Diverging lens – virtual image


## Image formation by a diverging lens

- No matter the position of the object all images formed by diverging lenses are:

- Virtual** (and not real)
  - Upright** (the same as the object)
  - Diminished** (smaller than the object)
  - On the **same side** of the lens as the object
- For an object placed at any distance away from the lens (further than the focal point or closer than):
- The ray of light incident on the centre of the lens does not change direction
  - The rays of light parallel to the principal axis are refracted
  - These rays can be extrapolated backwards
    - It appears that they come from a **virtual focus**
  - A visible projection cannot be formed on a screen




## Virtual image produced by a diverging lens with object beyond f

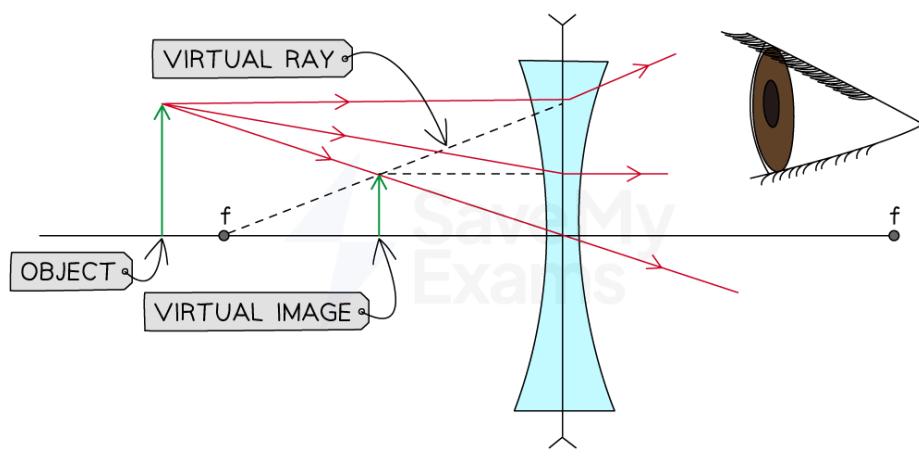

A diverging lens always produces a virtual image no matter the position of the object in relation to the focal point or the lens. Here the object is further away from the lens than the focal point.

## Virtual image produced by a diverging lens with object closer than f

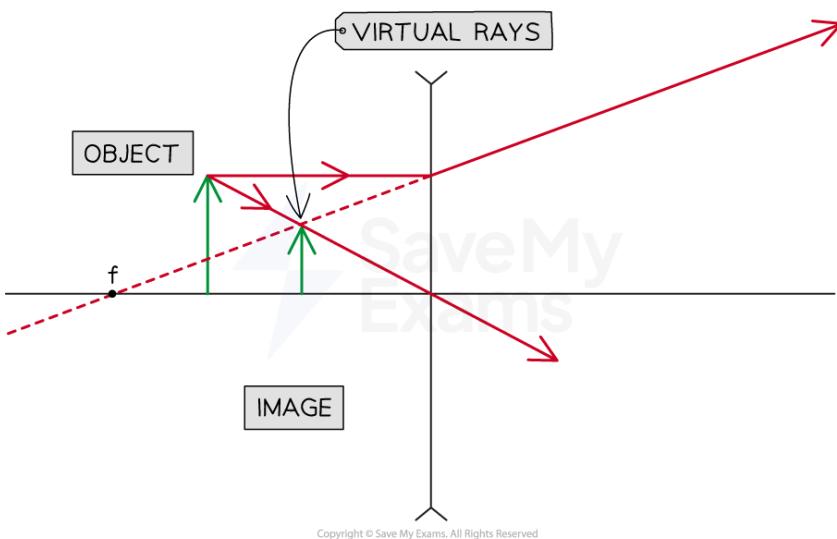
Copyright © Save My Exams. All Rights Reserved

**A diverging lens always produces a virtual image no matter the position of the object in relation to the focal point or the lens. Here the object is closer to the lens than the focal point.**

## Comparing converging & diverging lenses

- The image produced by a **converging** lens can be either **real** or **virtual**
  - This means the image can be inverted (real) or upright (virtual)
- The image produced by a **diverging** lens is always **virtual**
  - This means the image will always be upright




### Worked Example

An object is placed outside the focal point of a diverging lens.




Your notes

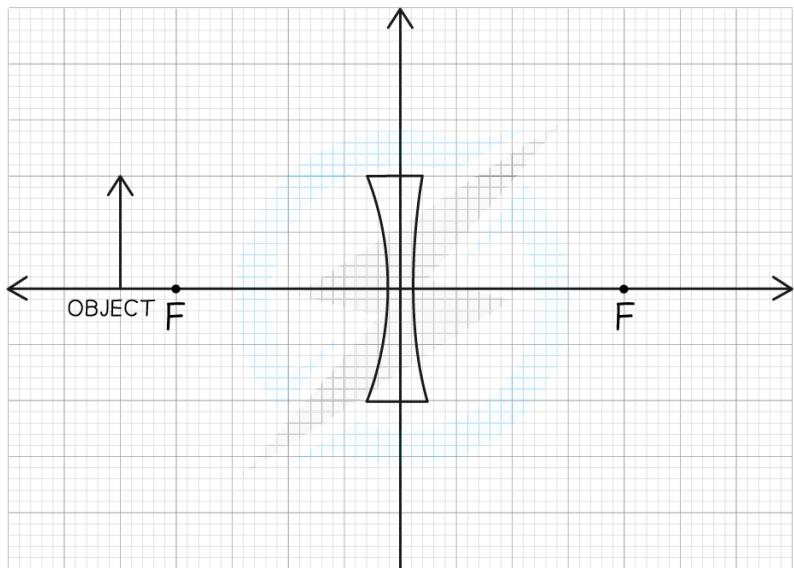

Copyright © Save My Exams. All Rights Reserved

Complete the ray diagram by drawing where the image of this object will be seen.

**Answer:**

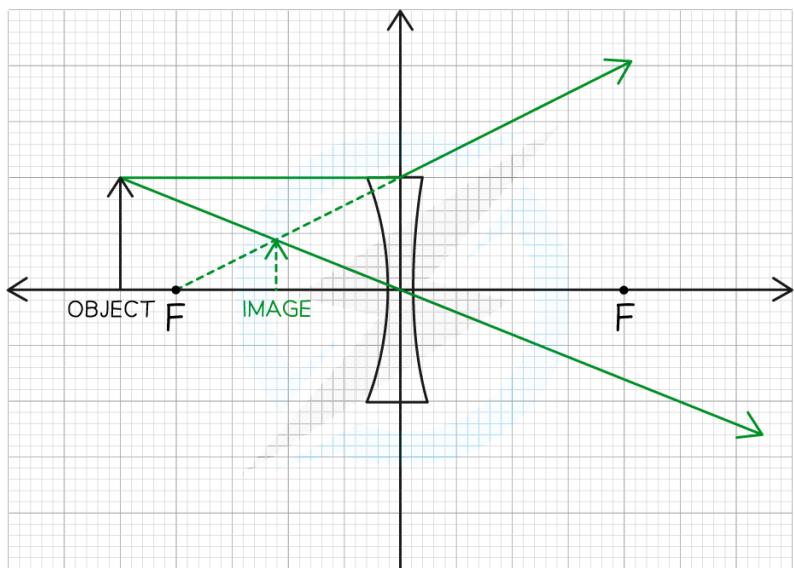

Copyright © Save My Exams. All Rights Reserved

**Step 1: Draw a line from the top of the object through the middle of the lens**

- The top of the image lies somewhere along this line

**Step 2: Draw a line from the focal point through the top of the lens**

- The dashed line shows the continuation of the upward arrow
- The top of the image is where the two lines cross



### Examiner Tips and Tricks

You are not expected to draw ray diagrams for a diverging lens but you must be able to explain how the virtual images are formed.



Your notes



# Correcting sight


Extended tier only

- Converging and diverging lenses are commonly used in glasses and contact lenses to correct defects of sight
  - Converging lenses can be used to correct long-sighted vision
  - Diverging lenses can be used to correct short-sighted vision

## Use of lenses to correct long-sightedness

- Long-sighted people have eyes that are **less curved** than normal or the eyeball is **too short**
  - This means they cannot see things that are close and can only clearly see things that are far away

## Ray diagram to show long-sightedness

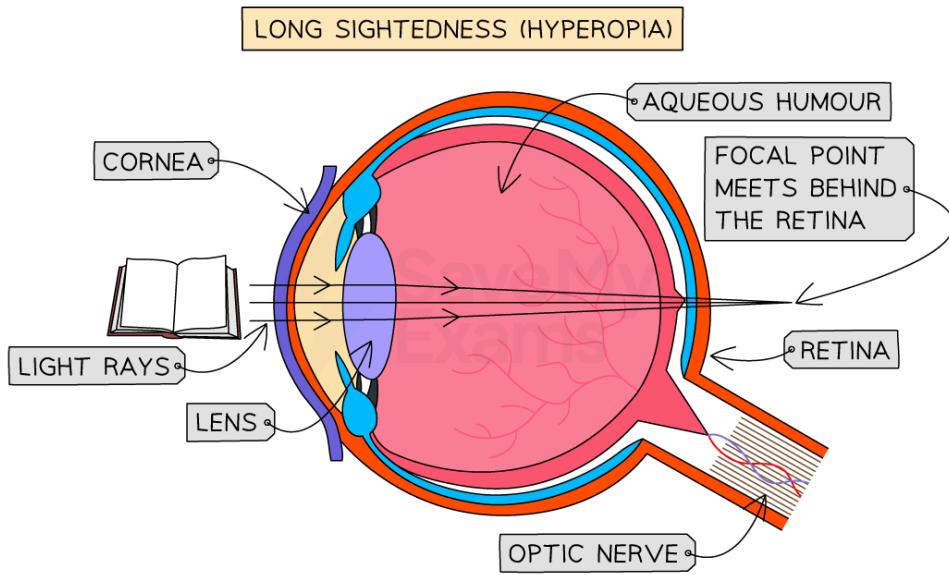


An eye that is long-sighted has a narrower lens with a smaller focussing power so the light rays meet and form an image behind the retina and not on it

- The eye refracts the light rays and they are brought to a focus **beyond** the retina
  - In other words, the focus point is behind the retina at the back of the eye
- This can be corrected by using a convex or **converging lens**

## The effect of a converging lens on a long-sighted eye



Your notes

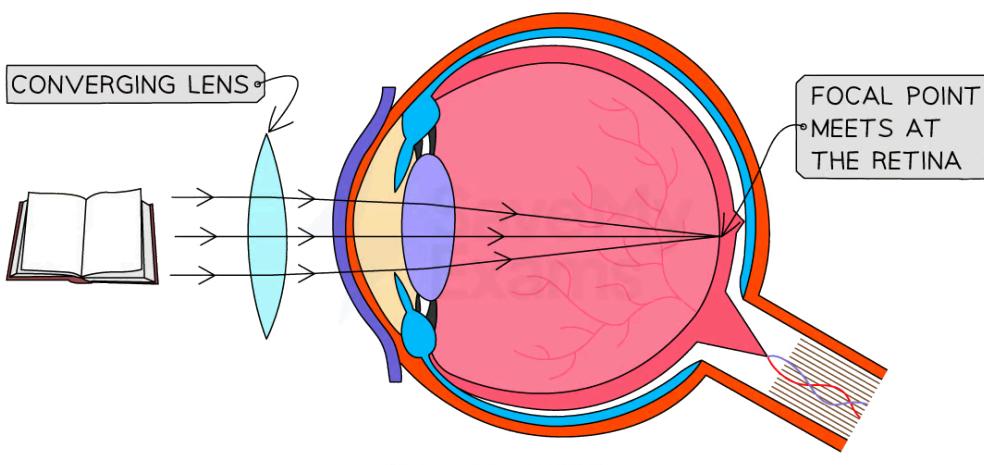


Copyright © Save My Exams. All Rights Reserved

**The converging lens causes the rays to converge before they reach the eye, so the image is formed on the retina and not behind it**

## Use of lenses to correct short-sightedness

- People who are **short-sighted** have eyes that are **more curved** than normal or have an eyeball that is **too long**
  - This means they cannot see things that are far away, and only see things that are close to them

## Ray diagram of short-sightedness

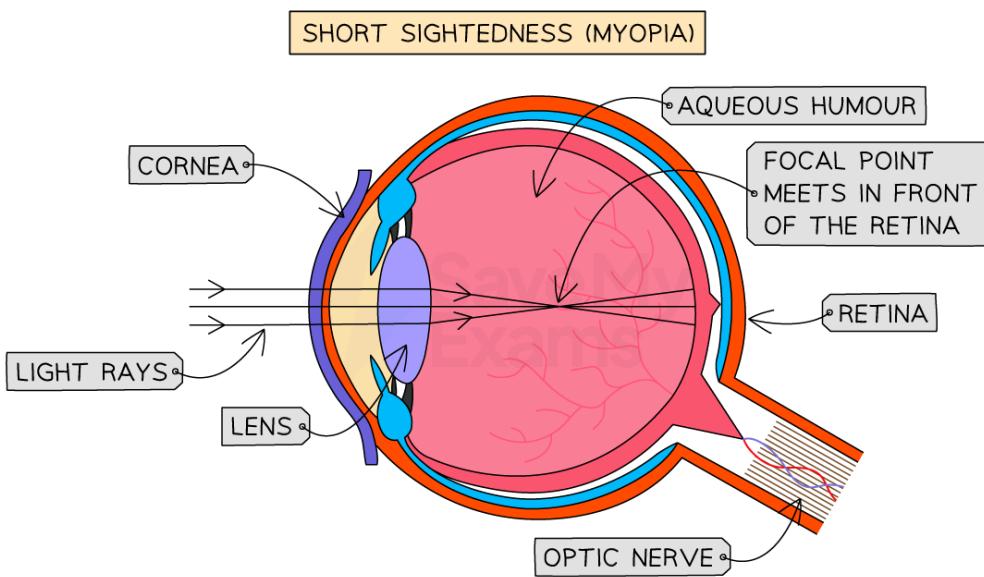


Copyright © Save My Exams. All Rights Reserved

**An eye that is short-sighted has a wider lens with a larger focussing power so the light rays meet and form an image in front of the retina and not on it**

- This is because the eye refracts the light and brings it to a focus **before** it reaches the retina
  - In other words, the focus point is in front of the retina at the back of the eye
- This can be corrected by using a concave or a **diverging lens**



## The effect of a diverging lens on a short-sighted eye

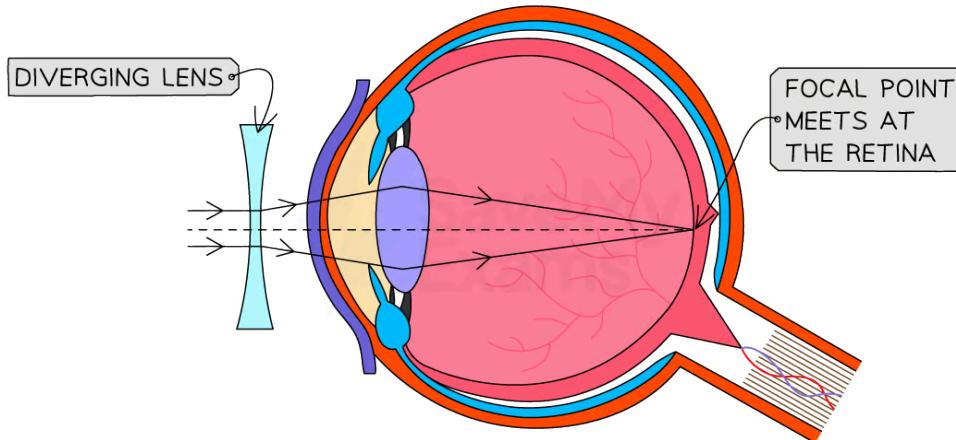

Copyright © Save My Exams. All Rights Reserved


**The diverging lens causes the rays to diverge before they reach the eye, so the image is formed on the retina and not in front of it**



# Dispersion of light

- The dispersion of light is illustrated by the refraction of white light by a glass prism
- White light contains the wavelengths of all the colours of the spectrum
  - Each colour has a different wavelength (and frequency), making up a very narrow part of the electromagnetic spectrum
- White light may be separated into all its colours by passing it through a glass prism
  - This is done by refraction
  - Violet light is refracted the most, whilst red light is refracted the least
  - This splits up the colours to form a spectrum
- This process is similar to how a rainbow is created

## Dispersion of light through a prism

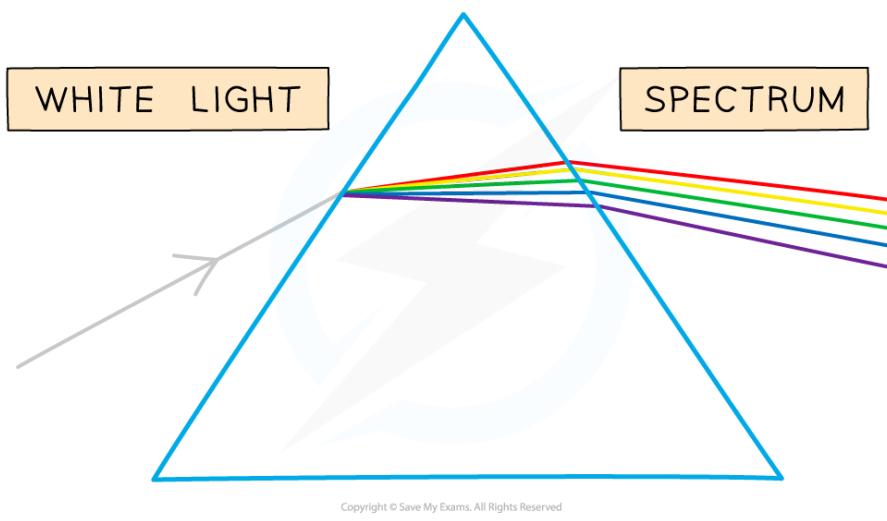

Copyright © Save My Exams. All Rights Reserved



**White light may be separated into all its colours by passing it through a prism**

# The visible spectrum of light

- Visible light is the only part of the spectrum detectable by the human eye
  - In the natural world, many animals, such as birds, bees and certain fish, can perceive beyond visible light and can see infra-red and UV wavelengths of light
- The seven different colours of visible light waves correspond to different wavelengths

- In order of longest wavelength and lowest frequency to shortest wavelength and highest frequency:
  - Red
  - Orange
  - Yellow
  - Green
  - Blue
  - Indigo
  - Violet



**The dispersion of light creates the seven colours of the visible spectrum**



**The colours of the visible spectrum: red has the longest wavelength; violet has the shortest**



### Examiner Tips and Tricks

To remember the colours of the visible spectrum you could remember either:

- The name “Roy G. Biv”
- Or the saying “Richard Of York Gave Battle In Vain”

## Monochromatic light


**Extended tier only**

- A visible light source of a single frequency (a single colour) is **monochromatic**
- A laser beam is monochromatic because it emits a single colour of light

## A laser beam



Your notes

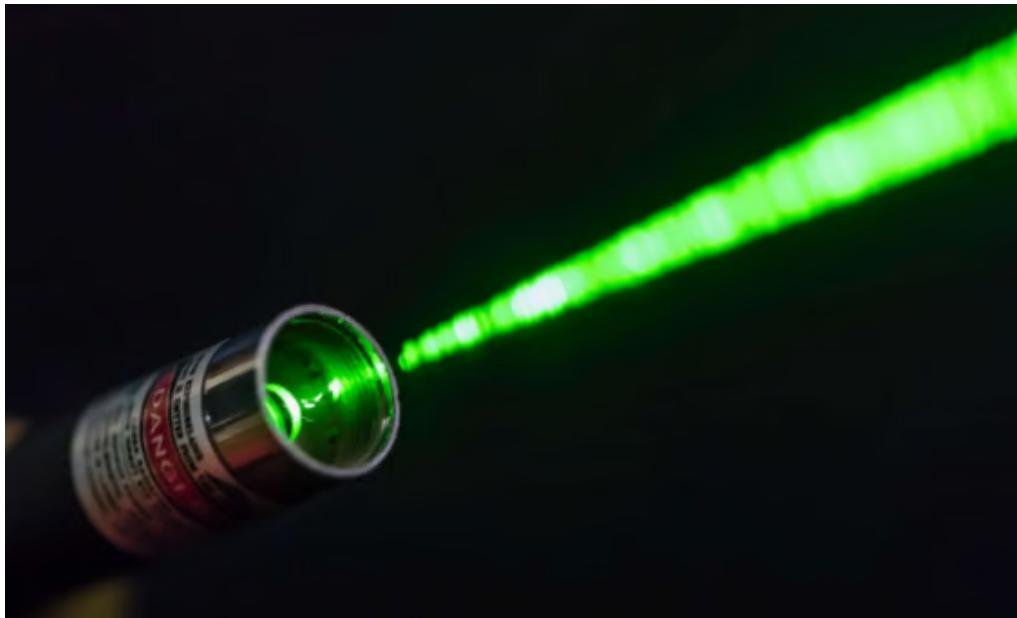

*The laser emits monochromatic green light*