

Inputs: switched 1/4" L/R (3.5 mm aux normalled to the tips, rings normalled to GND), USB build header J7




Balanced line receivers U1 (0 dB, tip +, ring −)




HIGH / LOW stage U2 (inverting, bridged dual pots, one gang per side)



AUX (pre) and FX (post) mono averagers U3, sends

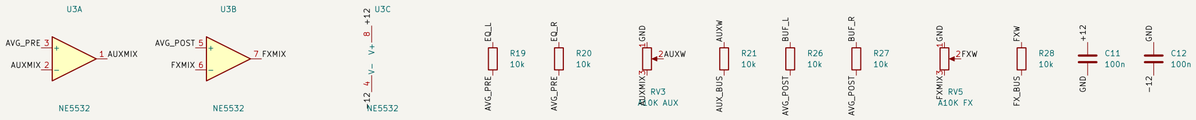

Dual fader (audio taper) and x2.5 buffers U4, balance



PEAK: two LM393 windows (+−8.2 V) on EQ_L and EQ_R, wired-OR to one LED



Fader meter: L/R peak detector U7 (TL072, diode-OR) + LM339 U8, 4 LEDs; PEAK LED D1 is the top step





Power J2 (rail filters) and bus J3, same as the mono strip



Sheet: /
File: mixer_stereo.kicad_sch

Title: Mixer Phase 4 — stereo strip (line / USB return)

Size: A2 | Date: 2026-10-26 | **Rev: 1**

KiCad E.D.A. 10.0.7 | Id: 1/1