
Input, phantom power, pad, clamps






Mic preamp U1 THAT1512 (INA128 pinout)




80 Hz HPF (U2A) and HIGH/LOW stage (U2B)







MID cell U3A + gyrator U3B




AUX (pre), fader + buffer U4A, FX (post), PAN



PEAK detector U5 LM393

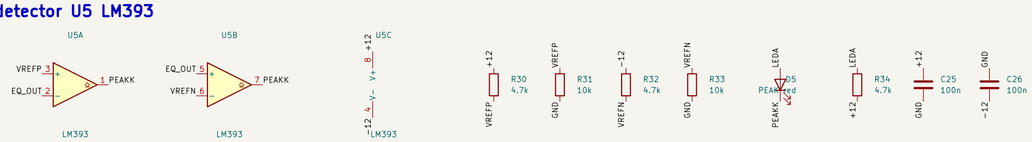

Fader meter: peak detector U6A (TL072) + LM339 U7, 4 LEDs; PEAK LED D5 is the top step

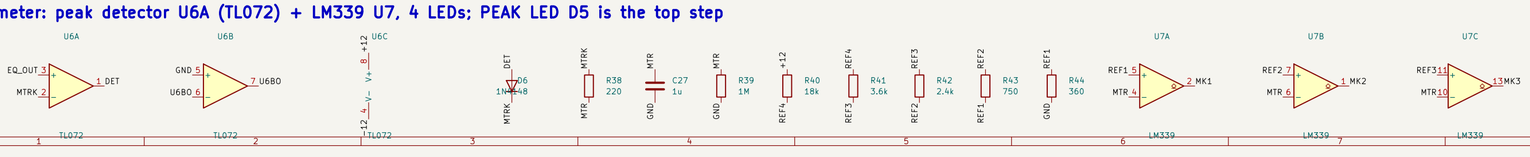

Sheet: /
File: mixer_strip.kicad_sch

Title: Mixer Phase 2 — mono mic channel strip

Size: A2 | Date: 2026-10-26 | **Rev: 1**

KiCad E.D.A. 10.0.7 | Id: 1/1